

[Manuals.plus](#) /

> [uahpet](#) /

> uahpet Pet Air Purifier (Model UJHQ03A) - Instruction Manual

uahpet UJHQ03A

uahpet Pet Air Purifier (Model UJHQ03A) - Instruction Manual

Your guide to setting up, operating, and maintaining your uahpet Pet Air Purifier.

1. PRODUCT OVERVIEW

The uahpet Pet Air Purifier (Model UJHQ03A) is designed to improve air quality in homes with pets by effectively reducing pet hair, dander, odors, dust, and smoke. It features a multi-layer filtration system and smart controls for convenient operation.

Key Features:

- **Pet Hair Optimized Design:** Features a U-shaped, clog-resistant air intake to efficiently capture airborne pet fur and dander.
- **Washable Pre-Filter:** A reusable pre-filter captures large particles like pet hair, extending the lifespan of the main HEPA filter and reducing maintenance costs.
- **Multi-Layer Deep Purification:** Equipped with an H13 True HEPA filter and activated carbon to remove 99.97% of airborne particles as small as 0.3 microns, including pet odors, litter box smells, and common household allergens.
- **Smart Control & Quiet Operation:** Supports 2.4GHz WiFi for app control, allowing real-time air quality monitoring and mode adjustments. Operates at an ultra-quiet 25dB in sleep mode, suitable for bedrooms and pet areas.
- **Compact & Portable:** Weighing 5.73 lb (2.6 kg), its slim design allows for easy placement in various locations, including near litter boxes or pet beds, for targeted purification.
- **Certified Safety & Support:** ETL, EPA, FCC, CE, CARB, and CA65 certified. Includes a 1-year protection plan and lifetime technical support.



Image 1.1: The uahpet Pet Air Purifier (Model UJHQ03A).

2. SETUP INSTRUCTIONS

2.1 Unboxing and Placement

1. Carefully remove the air purifier from its packaging.
2. Place the unit on a flat, stable surface. Ensure there is at least 6 inches (15 cm) of space around all sides for optimal airflow.
3. For best results in pet homes, position the purifier near pet activity zones, such as litter boxes, pet beds, or feeding areas.

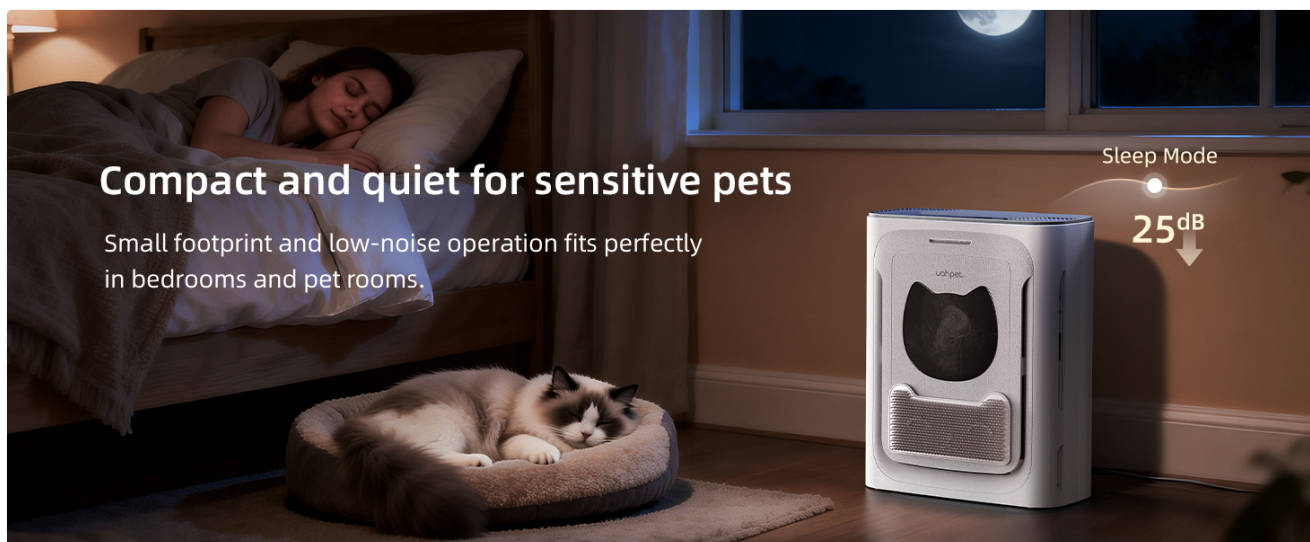


Image 2.1: Place the air purifier in areas where pets are active for targeted purification.

2.2 Filter Installation

Before first use, ensure all filters are properly installed and any protective packaging is removed.

1. Open the filter compartment cover, usually located on the side or back of the unit.
2. Remove the pre-installed filter set (pre-filter, H13 HEPA filter, activated carbon filter) and remove any plastic packaging.
3. Insert the filters back into the unit in the correct order, ensuring they are securely seated.
4. Close the filter compartment cover.



Image 2.2: The multi-layer filtration system, including washable pre-filter, H13 HEPA, and activated carbon.

Simple Maintenance, No Tools Needed

Designed for easy filter and pre-filter replacement, suitable for everyday pet households. Replacement frequency depends on usage and environment.



Image 2.3: Filter installation is designed to be simple and tool-free.

2.3 Power Connection

Connect the power adapter to the air purifier and then plug it into a standard electrical outlet. The unit will typically emit a beep or light up to indicate it has power.

2.4 App Connection (2.4GHz WiFi)

For smart control features, download the uahpet app from your device's app store. Follow the in-app instructions to connect your air purifier to your 2.4GHz WiFi network. This enables remote control, air quality monitoring, and scheduling.

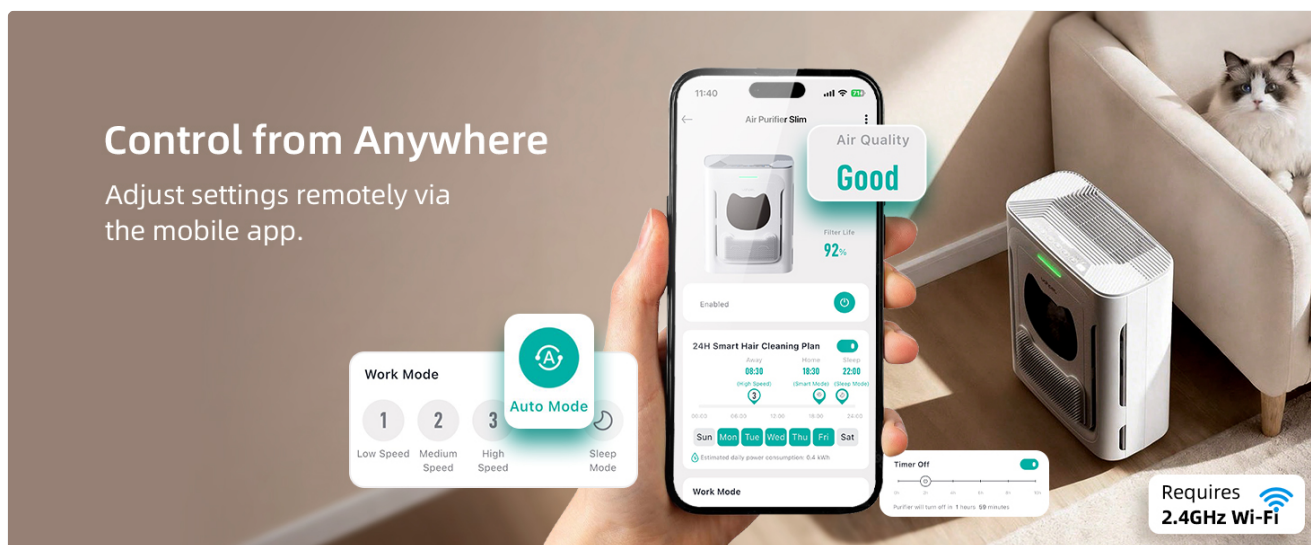


Image 2.4: The uahpet app allows for convenient remote control and monitoring.

3. OPERATING INSTRUCTIONS

3.1 Control Panel Overview

The air purifier can be operated using the touch controls on the top panel or via the uahpet mobile app.

- **Power Button:** Turns the unit on or off.
- **Fan Speed Button:** Cycles through different fan speeds (Low, Medium, High).

- **Mode Button:** Selects operating modes such as Auto Mode or Sleep Mode.
- **Timer Button:** Sets a timer for automatic shutdown.
- **Child Lock:** Activates or deactivates the child lock feature to prevent accidental changes.

Your browser does not support the video tag.

Video 3.1: Official uahpet video demonstrating the air purifier's features and controls.

3.2 Operating Modes

- **Auto Mode:** The purifier automatically adjusts fan speed based on detected air quality.
- **Sleep Mode:** Operates at the lowest fan speed with minimal noise (25dB) and dimmed indicator lights for undisturbed rest.
- **Manual Speed:** Choose from Low, Medium, or High fan speeds for continuous operation at your desired intensity.

3.3 Air Quality Indicator

The unit features an LED indicator light that changes color to reflect real-time air quality:

- **Green:** Good air quality.
- **Yellow/Orange:** Fair air quality.
- **Red:** Poor air quality.

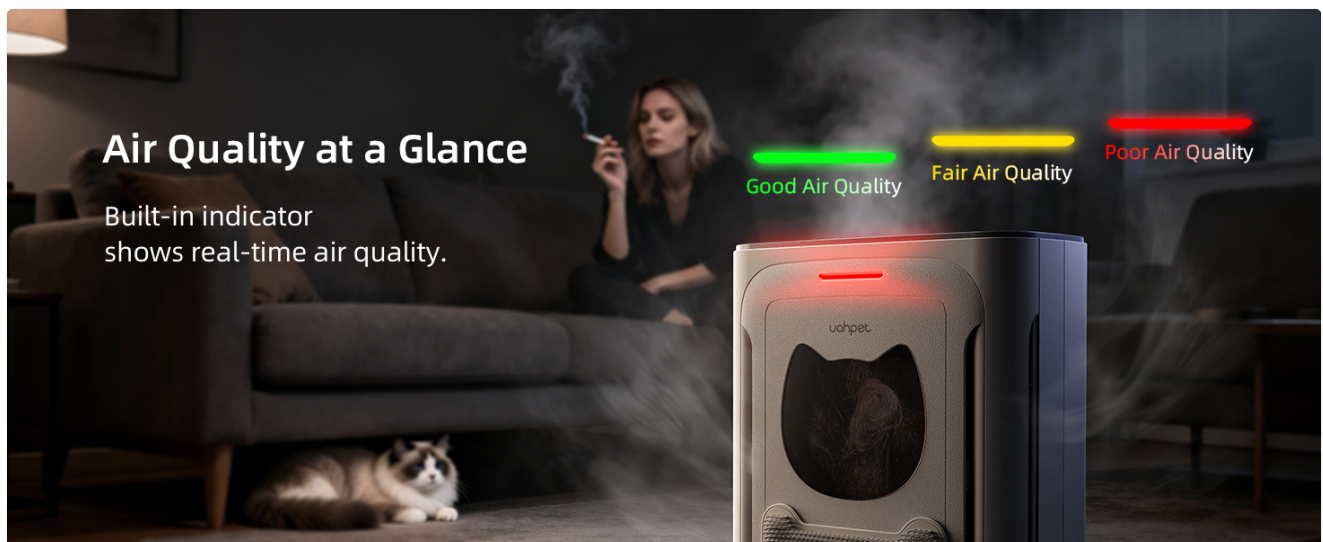


Image 3.1: The air quality indicator provides visual feedback on your indoor environment.

4. MAINTENANCE

Regular maintenance ensures optimal performance and extends the life of your air purifier.

4.1 Cleaning the Washable Pre-Filter

The washable pre-filter should be cleaned regularly, especially in homes with multiple pets. This helps prevent clogging and maintains purification efficiency.

1. Turn off and unplug the air purifier.
2. Open the filter compartment and carefully remove the pre-filter.

3. Gently tap or vacuum the pre-filter to remove loose pet hair and dust.
4. Rinse the pre-filter under running water until clean. Use mild soap if necessary.
5. Allow the pre-filter to air dry completely before reinserting it into the unit.

Washable Pre-filter = Extends Filter Life

Captures **90%** of large particles. Washable pre-filter extends the life of your HEPA filter



Image 4.1: The washable pre-filter can be easily rinsed under water.

Cost-Saving Reusable Pre-Filter



Image 4.2: Step-by-step guide for cleaning the reusable pre-filter.



Image 4.3: Example of pet hair collected by the pre-filter over time.

4.2 Replacing the H13 HEPA Filter

The H13 HEPA filter and activated carbon filter are integrated and should be replaced together. The replacement frequency depends on usage and air quality, typically every 6-8 months.

1. Turn off and unplug the air purifier.
2. Open the filter compartment.
3. Remove the old HEPA filter.
4. Insert a new H13 HEPA filter, ensuring it fits snugly.
5. Close the filter compartment cover.
6. Reset the filter replacement indicator (if applicable, refer to the app or control panel instructions).

Replacement filters can be purchased from authorized uahpet retailers or online stores. Search for "uahpet Air Purifier Slim Replacement Filter".

5. TROUBLESHOOTING

5.1 Common Issues and Solutions

Problem	Possible Cause	Solution
Unit does not turn on.	No power, loose connection.	Ensure power adapter is securely plugged into the unit and a working electrical outlet.
Poor air purification performance.	Clogged pre-filter, expired HEPA filter, unit placed incorrectly.	Clean the washable pre-filter. Replace the HEPA filter if due. Ensure adequate space around the unit for airflow.
Unusual noise during operation.	Obstruction in fan, loose filter.	Turn off and unplug the unit. Check for any foreign objects near the fan or air intake. Ensure filters are properly seated.

Problem	Possible Cause	Solution
App cannot connect to the purifier.	Incorrect WiFi network (not 2.4GHz), poor signal, app error.	Ensure your phone and purifier are on a 2.4GHz WiFi network. Restart the app and purifier. Re-attempt the pairing process.
Air quality indicator always shows poor.	High levels of pollutants, sensor obstruction.	Ensure the air quality sensor (refer to manual for location) is clean and unobstructed. Allow time for the purifier to clean the air.

If the problem persists after trying these solutions, please contact uahpet customer support.

6. PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	UJHQ03A
Product Dimensions	6.1 x 11.81 x 14.64 inches
Item Weight	4.63 Pounds (2.1 kg)
Power Source	AC
Control Method	App, Push Button
Filter Type	H13 HEPA
Floor Area Coverage	Up to 2100 Square Feet
Noise Level	25 Decibels (Sleep Mode)
Contaminant Filtration Capability	Dust, Odors, Pet Dander, Pet Hair, Smoke
Special Features	U-shaped air intake for pet hair, washable pre-filter, compact and quiet operation
Included Components	Air Purifier Unit, HEPA Filter, Pre-Filter, Power Cable

7. WARRANTY AND SUPPORT

7.1 Product Warranty

The uahpet Pet Air Purifier (Model UJHQ03A) comes with a **1-year full-unit protection plan**. This warranty covers defects in materials and workmanship under normal use. For specific terms and conditions, please refer to the warranty card included with your product or contact customer support.

7.2 Customer Support

For any questions, technical assistance, or warranty claims, please contact uahpet customer service. We offer **24/7**

online customer service and **lifetime technical support** to ensure your peace of mind.

- **Online Support:** Visit the official uahpet website for FAQs and support resources.
- **Email Support:** Refer to your product packaging or the uahpet website for contact email.

Please have your model number (UJHQ03A) and purchase information ready when contacting support.