

[Manuals.plus](#) /

> [HotYeah](#) /

> HotYeah Portable Laptop Monitor P156A02C User Manual

HotYeah P156A02C

HotYeah Portable Laptop Monitor P156A02C User Manual

Model: P156A02C

1. INTRODUCTION

This manual provides instructions for the HotYeah 15.6-inch 1080P FHD Portable Laptop Monitor, Model P156A02C. This external display is designed to enhance productivity and entertainment by offering a secondary screen for various devices.

2. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x 15.6" Portable Monitor
- 1 x Mini-HDMI to HDMI Cable
- 1 x USB-C to USB-C Cable



Image: Package contents of the HotYeah Portable Monitor.

3. PRODUCT OVERVIEW

Familiarize yourself with the monitor's ports and control buttons.

Compatible With Most Devices



Image: Overview of monitor ports and control buttons.

Ports and Buttons:

- **Mini-HDMI Port:** For video input from devices supporting HDMI output.
- **Full-functional Type-C Port:** For video input, audio, data transfer, and power delivery with a single cable. Your device must support Thunderbolt 3.0/4.0 or USB 3.1 Type-C DP ALT-MODE.
- **Power Supply Type-C Port:** Dedicated port for external power input.
- **OTG Port:** For connecting wired peripherals like a keyboard or mouse.
- **Power/Return Button:** Powers the monitor on/off and acts as a return button in the OSD menu.
- **OSD Menu Button:** Accesses the On-Screen Display menu for settings adjustments.
- **Up Button:** Navigates up in menus or increases values.
- **Down Button:** Navigates down in menus or decreases values.

4. SETUP

4.1 Powering On

Press and hold the Power/Return button for a few seconds to turn the monitor on. Ensure the monitor receives adequate

power via one of the Type-C ports.

4.2 Connecting to Devices

The monitor supports two primary connection methods:

USB-C Single Cable Connection

If your device has a full-function USB-C port (supporting Thunderbolt 3.0/4.0 or USB 3.1 Type-C DP ALT-MODE), you can use a single USB-C to USB-C cable for both video signal and power.



Image: Laptop connected to the monitor using a single USB-C cable.

Note: To identify a full-function Type-C port, look for symbols such as a lightning bolt, 'SS' with a 'D' (DisplayPort), or 'SS' with a power plug icon next to the port.

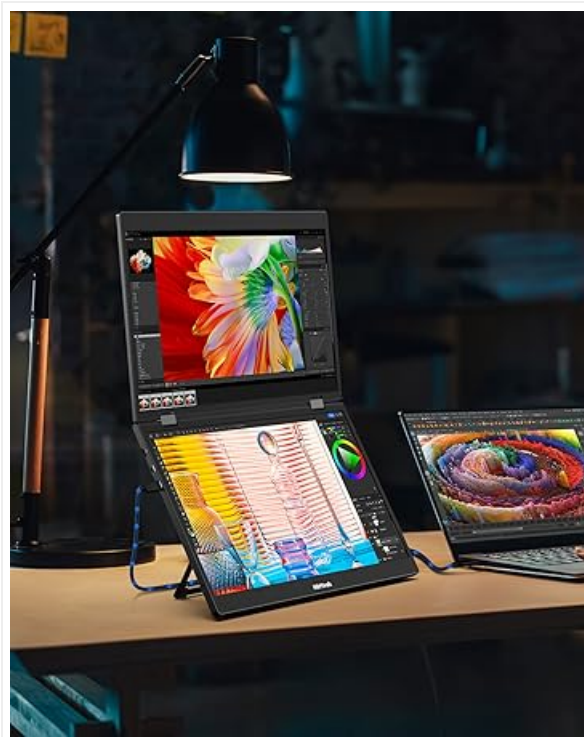


Image: Common symbols for full-function Type-C ports.

HDMI Cable Connection

For devices with an HDMI output, use the provided Mini-HDMI to HDMI cable. When using HDMI, the monitor requires external power supplied through the Power Supply Type-C port (20W or above power adapter recommended, not included).

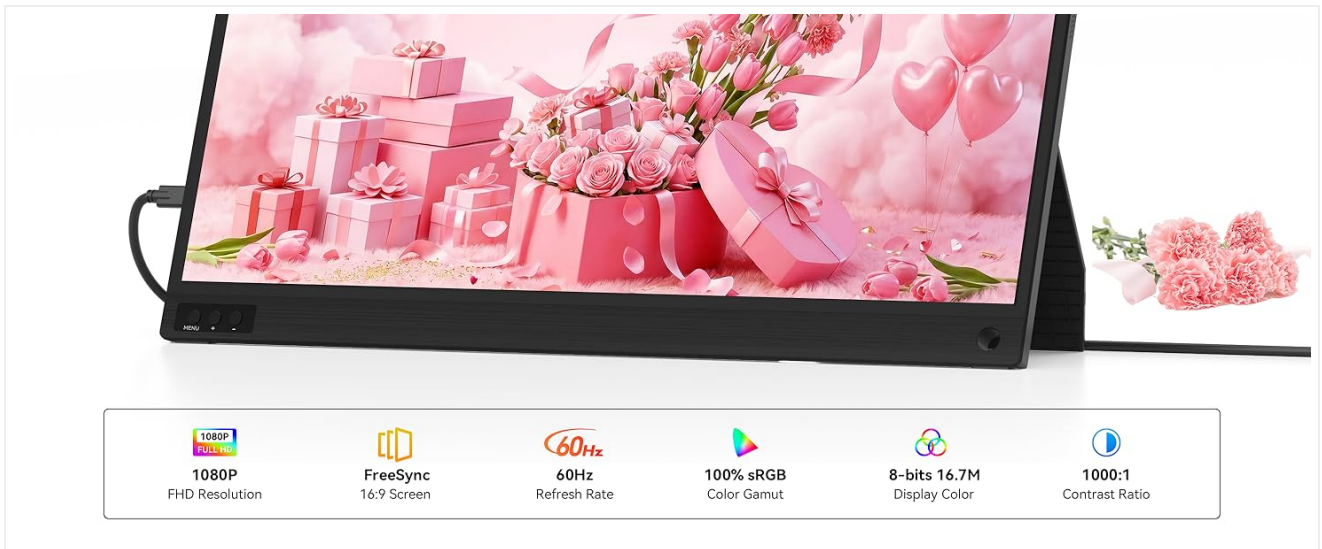


Image: Laptop connected to the monitor using HDMI and external power.

4.3 Kickstand and VESA Mounting

The monitor features a built-in foldable kickstand, allowing for adjustable viewing angles up to 90 degrees. It can be positioned horizontally or vertically on a desk.

For alternative mounting, the monitor supports 75 x 75 mm VESA (M4 Screw) wall-mounted solutions (VESA mount not included).

Flexible Kickstand & VESA Compatible



Landscape Mode



Portrait Mode



VESA Mounted



75 x75mm VESA

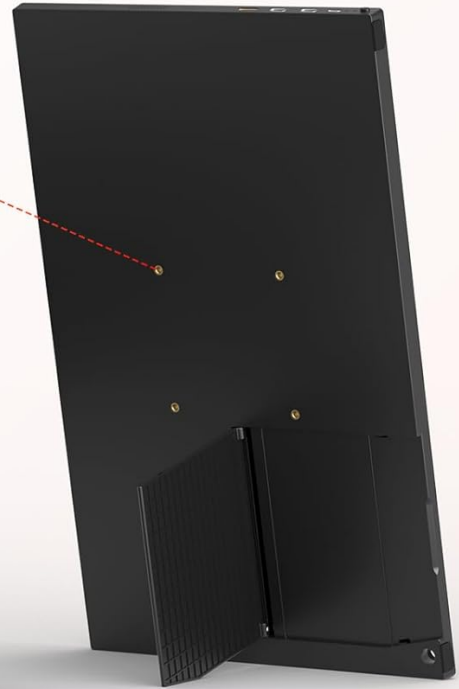


Image: Monitor with built-in kickstand and VESA mounting points.

5. OPERATING THE MONITOR

5.1 Display Modes

The monitor supports various display modes to suit your needs:

- **Extend Mode:** Extends your primary screen, providing more desktop space for multitasking.
- **Mirror Mode:** Duplicates your primary screen, useful for presentations or sharing content.
- **Second Screen Only:** Uses the portable monitor as the sole display.
- **Landscape and Portrait Modes:** The display can be rotated to suit different content, such as documents or coding.

5.2 On-Screen Display (OSD) Menu

Use the OSD Menu button to access settings. Navigate with the Up and Down buttons, and confirm selections with the OSD Menu button. The Power/Return button acts as a back function.

Adjust settings such as brightness, contrast, color temperature, input source, and other display parameters.

5.3 Key Features

- **FreeSync:** Provides a smooth, tear-free gaming experience by synchronizing the monitor's refresh rate with your device's graphics card.
- **Low Blue Light:** Reduces blue light emissions to minimize eye strain during prolonged use.
- **178° Viewing Angle:** Ensures consistent image quality from various perspectives.

5.4 Device Compatibility

The monitor is compatible with a wide range of devices, including:

- Laptops (Windows, Mac)
- PCs
- Smartphones (requires full-function USB-C or appropriate adapter for older iPhones)
- Tablets
- Gaming Consoles (Nintendo Switch, PS5/4, Xbox, Wii)

6. MAINTENANCE

To ensure the longevity and optimal performance of your HotYeah Portable Monitor, follow these maintenance guidelines:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen and exterior. For stubborn marks, slightly dampen the cloth with water or a screen-cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Handling:** Handle the monitor with care. Avoid dropping it or subjecting it to strong impacts.
- **Storage:** When not in use, store the monitor in a cool, dry place, away from direct sunlight and extreme temperatures.
- **Protection:** Consider using a protective sleeve or case when transporting the monitor to prevent scratches and damage.

7. TROUBLESHOOTING

Refer to the following common issues and solutions:



Image: Frequently Asked Questions for the portable monitor.

Question	Answer
What should I know before buying this dual monitor?	<ol style="list-style-type: none"> 1. Not support Bluetooth, wireless, and WiFi connection. No battery. Not touchscreen. 2. Devices without a full-function Type-C port or HDMI port may need an adapter (not included) to connect. 3. For phones and tablets, it only supports mirror landscape mode. 4. iPhone (before 15 Gen) needs a lightning to HDMI adapter for connection.
I have charged my monitor for a long time. Why does the monitor still show "no signal"?	HotYeah portable monitor DOES NOT have an internal battery. Please connect your device to the monitor for use.
Will any USB-C to USB-C cable work well with this monitor?	No. The USB-C cable should be 3.1 version or above which supports video output.
Do I have to install a driver?	No. Just plug and play.
What's the function of each cable?	<ul style="list-style-type: none"> • [USB-C to USB-C cable]: For video output and power delivery. • [Mini-HDMI to HDMI cable]: Only for video output. <p><i>* No included power adapter. Please use your own power adapter to supply your monitor separately.</i></p>

8. SPECIFICATIONS

Detailed technical specifications for the HotYeah Portable Laptop Monitor P156A02C:

Feature	Specification
Brand	HotYeah
Model Number	P156A02C
Screen Size	15.6 Inches
Resolution	FHD 1080p (1920 x 1080 Pixels)
Aspect Ratio	16:9, 4:3
Screen Surface Description	Matte
Contrast Ratio	1000:1
Refresh Rate	60 Hz
Display Technology	IPS, LCD
Viewing Angle	178 Degrees
Brightness	300 Candela

Feature	Specification
Color Gamut	100% sRGB
Response Time	1 Milliseconds
Connectivity Technology	HDMI, USB Type C
Hardware Connectivity	Thunderbolt, USB Type C, Mini HDMI
Adaptive Sync	FreeSync
Item Dimensions (D x W x H)	13.98"D x 0.4"W x 8.86"H
Item Weight	1.5 Pounds
Color	Black
Mounting Type	Desk Mount, VESA (75x75mm)
Additional Features	Adaptive Sync, Blue Light Filter, Flicker-Free, Portable, Tilt Adjustment

9. WARRANTY AND SUPPORT

HotYeah provides a 1-year manufacturer warranty and a 30-day return policy for this product. For any questions or assistance, please contact our customer service team.

- **Warranty Period:** 12 months from the date of purchase.
- **Return Policy:** 30-days for no reason.
- **Customer Service:** 24/7 online support.
- **Email:** support@hotyeahmonitor.com