

[Manuals.plus](#) /

› [JAZAVA](#) /

› JAZAVA 72 Inch Smart Ceiling Fan with Light (Model ZCCF05BK-72) Instruction Manual

JAZAVA ZCCF05BK-72

JAZAVA 72 Inch Smart Ceiling Fan with Light

Model: ZCCF05BK-72

INTRODUCTION

Thank you for choosing the JAZAVA 72 Inch Smart Ceiling Fan with Light. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new ceiling fan. Please read all instructions carefully before beginning installation and retain this manual for future reference.

This 72-inch ceiling fan is designed for large indoor and outdoor spaces, featuring smart control capabilities via Alexa voice commands, a dedicated mobile app (2.4GHz WiFi), and an included remote control. It incorporates a quiet, energy-efficient DC motor and a dimmable LED light kit.

SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always follow these basic precautions:

- Read all instructions and safety information before installing your fan and save these instructions.
- All wiring must be in accordance with national and local electrical codes. Installation should be performed by a qualified licensed electrician.
- The fan must be mounted with a minimum of 7 feet (2.1 meters) clearance from the trailing edge of the blades to the floor.
- Ensure the mounting location can support the fan's weight (approximately 21.94 lbs).
- Always disconnect power at the main circuit breaker before installation or servicing.
- Do not operate the fan with damaged power cords or plugs.
- Avoid placing objects in the path of the fan blades.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Fan Motor Assembly

- 8 Fan Blades (Dual-finish: Black & Walnut)
- Mounting Bracket
- Downrods (5", 10", 24" included; 48" available separately)
- Canopy and Decorative Cover
- LED Light Kit
- Remote Control
- Receiver/Controller
- Hardware Pack (screws, wire nuts, etc.)
- Instruction Manual

SETUP AND INSTALLATION

Professional installation is recommended. Ensure power is disconnected at the circuit breaker before proceeding.

1. Install Mounting Bracket

Secure the mounting bracket to the ceiling outlet box. For added safety, install the J-hook through the center of the outlet box into a wooden joist and hang the safety cable onto it.

Your browser does not support the video tag.

Video: JAZAVA ZCCF05BK Ceiling Fan Installation Video. This video demonstrates the complete installation process for the JAZAVA ZCCF05BK ceiling fan, including mounting the bracket, wiring, and attaching components.

2. Select and Install Downrod

Choose the appropriate downrod length based on your ceiling height to ensure optimal airflow and safety clearance. The fan comes with 5", 10", and 24" downrods. A 48" downrod is available for purchase separately.

- **8-9 ft ceilings:** Use 5" downrod (standard ceiling installation).
- **9-10 ft ceilings:** Use 10" downrod (medium-height ceilings).
- **10-12 ft ceilings:** Use 24" downrod (high or vaulted ceilings).



Image: Downrod Guide. This image illustrates recommended downrod lengths for various ceiling heights, from 8 ft to 14 ft, to ensure proper fan operation and safety clearance.

3. Wiring Connections

Connect the fan's electrical wires to your household wiring according to the provided wiring diagram. Ensure all connections are secure using wire nuts. The fan includes a safety cable that should be attached to the J-hook in the outlet box to prevent accidental detachment.



Image: Safety Cord Installation. This image shows how to add a safety cord to the ceiling fan, preventing fixture detachment and ensuring user confidence during installation.

4. Attach Fan Blades

Attach the 8 fan blades to the motor assembly. The blades feature a dual-finish (Black & Walnut) allowing you to choose your preferred aesthetic. Ensure all screws are tightened securely.



Image: Premium Dual-Finish Plywood Blades. This image highlights the reversible black and walnut finish of the fan blades, emphasizing their structural stability and balanced airflow coverage.

5. Pair Remote and Receiver

After installation and restoring power, pair the remote control with the fan's receiver. This typically involves turning the power off and on, then pressing a pairing button on the remote within a specific timeframe (usually 30 seconds).



Image: Easy Setup Guide for Remote Pairing. This guide outlines three steps to pair the CF05 remote and receiver: power cycle, hold pairing button, and wait for a beep confirmation.

OPERATING INSTRUCTIONS

Your JAZAVA smart ceiling fan offers multiple control options for convenience.

Remote Control Operation

The included remote control allows you to adjust fan speed, light settings, and other features:

- **Fan Speed:** Select from 6 speeds (Mild Comfort, Sturdy Gust, Turbo Force).
- **Light Control:** Turn the LED light on/off, adjust brightness (10%-100%), and change color temperature (3000K Warm Light, 4000K Neutral Light, 5000K Cool Light).
- **Reverse Function:** Switch between summer (counter-clockwise) and winter (clockwise) modes.
- **Timer:** Set the fan to turn off after 1, 2, or 4 hours.
- **Nature/Fresh Mode:** Simulates natural breeze by varying fan speed.

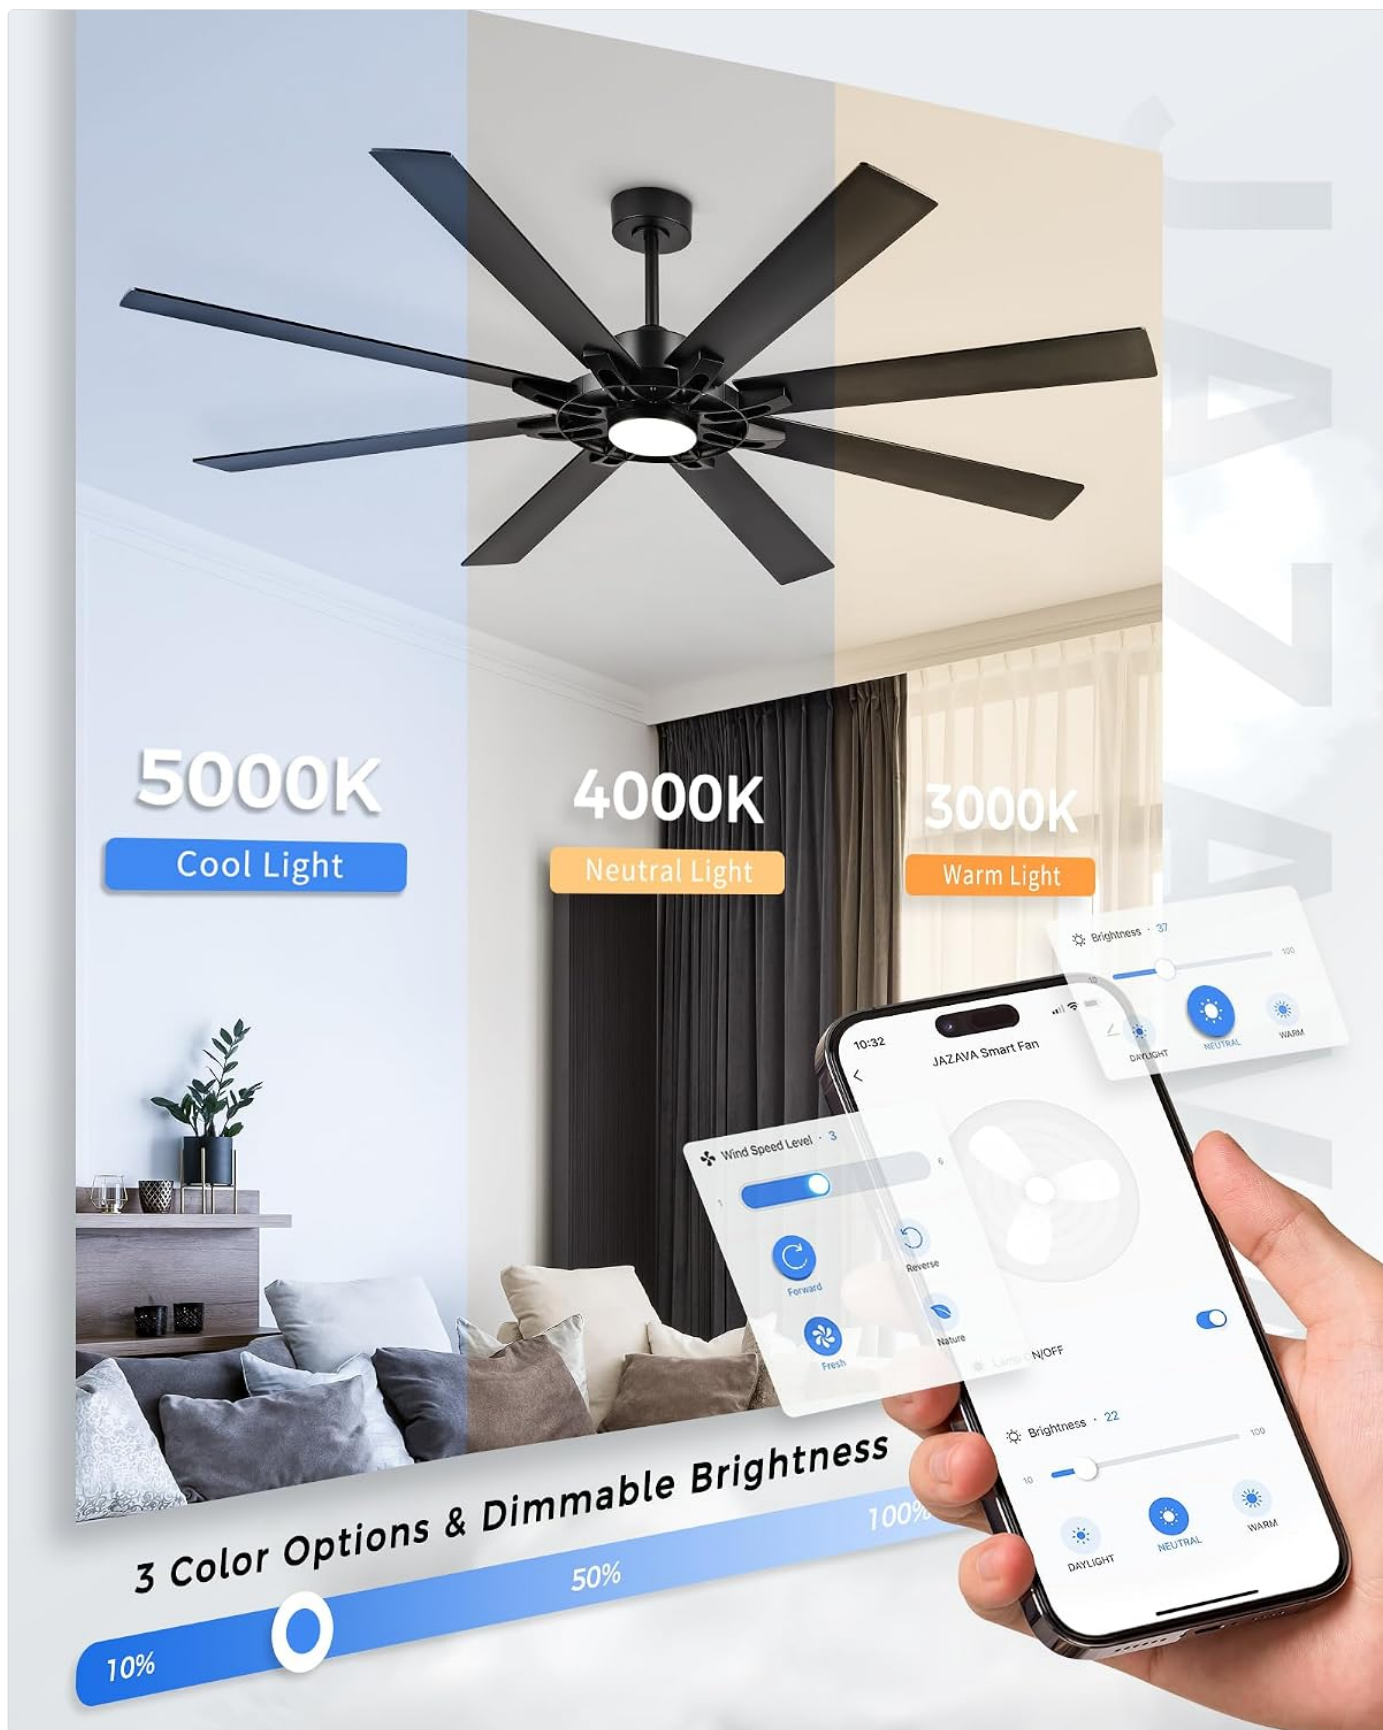


Image: 3 Color Options & Dimmable Brightness. This image demonstrates the adjustable color temperatures (3000K, 4000K, 5000K) and dimmable brightness (10%-100%) of the integrated LED light.

JAZAVA

130 RPM

Powerful DC Motor

12450 CFM

The Cubic Feet Per Minute

**1-2
SPEED**

Mild Comfort

**3-4
SPEED**

Sturdy Gust

**5-6
SPEED**

Turbo Force

Image: Reversible DC Motor. This image illustrates the reversible function of the fan, showing counter-clockwise rotation for summer cooling and clockwise rotation for winter heat distribution.

Smart App Control

Download the JAZAVA Smart Fan app (compatible with 2.4GHz WiFi) to control your fan from your smartphone or tablet. The app provides all remote control functionalities and additional scheduling options.

Your browser does not support the video tag.


Video: Smart Ceiling Fan APP Connection ZCCF05BK. This video guides users through the process of connecting the JAZAVA ZCCF05BK smart ceiling fan to the mobile application for remote control.

Alexa Voice Control

Integrate your JAZAVA smart fan with Alexa for convenient voice control. Once connected via the app, you can use commands such as:

- "Alexa, turn on/off [device name] fan."
- "Alexa, brighten/dim the [device name] light."
- "Alexa, set [device name] fan speed to [1-6]."

PRODUCT DETAILS

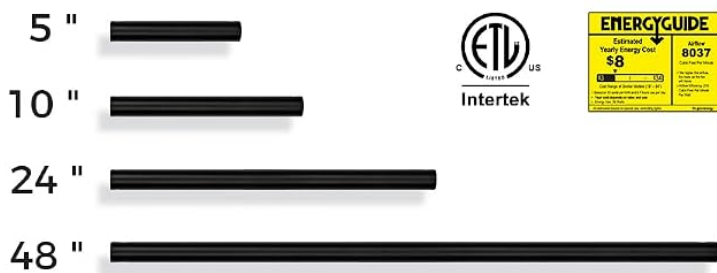

Room Size
20ft x 22ft



(curtain rods for sale, shipped locally for faster delivery)

Image: Smart Control Ceiling Fan. This image highlights the smart control features of the fan, including Alexa voice control, smart app integration, and various modes like Nature, Fresh, Reverse, Timing, Daylight, and Brightness adjustment.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Use a soft, damp cloth to clean the fan blades and motor housing. Do not use abrasive cleaners or

solvents.

- **Blade Inspection:** Periodically check that all blade screws are tight. Loose blades can cause wobbling and noise.
- **Light Kit:** The LED light kit is integrated and designed for long life. If replacement is needed, contact customer support.
- **Dusting:** Dust the fan regularly to prevent buildup, which can affect performance and appearance.

TROUBLESHOOTING

If you encounter issues with your JAZAVA ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power, loose wiring, remote not paired.	Check circuit breaker. Ensure all wires are securely connected. Re-pair remote (see Setup section).
Fan wobbles	Loose blades, uneven blade weight, improper mounting.	Tighten all blade screws. Check mounting bracket for secure installation.
Light does not work	Loose wiring, LED driver issue.	Check light kit wiring connections. Contact support if LED driver is suspected.
Remote/App not responding	Remote battery low, pairing lost, WiFi issue (for app).	Replace remote battery. Re-pair remote/app. Ensure 2.4GHz WiFi is active and stable.
Noise during operation	Loose screws, internal component issue.	Check all screws on blades and housing. Ensure no wires are rubbing. If noise persists, contact support.

Troubleshooting Pairing Issues



Image: Troubleshooting Pairing Issues. This image provides a six-point checklist for resolving remote or app pairing problems, including checking the pairing time window, remote battery, wiring, nearby fans, power supply, and resetting the controller.

SPECIFICATIONS

Brand	JAZAVA
Model Name	ZCCF05BK-72
Color	Black & Walnut
Size	72 Inch
Number of Blades	8
Motor Type	DC Motor
Number of Speeds	6
Air Flow Capacity	4270–12450 CFM

Noise Level	35 Decibels
Light Kit	Dimmable 22W LED
Color Temperature	3000K-5000K (Adjustable)
Control Type	App Control, Remote Control, Voice Control (Alexa)
Indoor/Outdoor Usage	Indoor, Outdoor
Product Dimensions	72"D x 72"W x 32.28"H (with 24" downrod)
Item Weight	21.94 Pounds
Certifications	FCC, DOE, ETL Certified

WARRANTY AND SUPPORT

JAZAVA provides responsive, professional after-sales service. Our support team is available to assist with any questions or issues you may encounter.

- **Support Hours:** Monday–Friday, 8:30 a.m.–5:00 p.m. (PT)
- **Phone:** +1 (6**)-**-1518
- **Email:** service@*****.com

Please refer to your purchase documentation for specific warranty details. As a U.S.-based company, JAZAVA aims for faster issue resolution with local engineers and support.



RCS
CERTIFIED

Quiet DC Motor



DOE



* Certified under the Recycled Claim Standard (RCS) by independent third-party verification

Image: Timely U.S.-Based Support. This image emphasizes JAZAVA's commitment to customer support, providing contact information and operating hours for setup, installation, and troubleshooting assistance.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question