PUPKIDS T223

PUPKIDS T223 Dog Training Collar Instruction Manual

Model: T223

Introduction

Thank you for choosing the PUPKIDS T223 Dog Training Collar. This manual provides detailed instructions for the safe and effective use of your new training device. Please read this manual thoroughly before operation to ensure proper usage and to maximize the training benefits for your dog.
The PUPKIDS T223 is designed for dogs weighing between 20-140 lbs with adjustable neck sizes from 12-25 inches. It is not recommended for small breeds. This system features a 4200ft long range, 4 versatile training modes (tone, vibration, static, night-light), and is IPX7 waterproof for the receiver collar.

Important Safety Information

- This device is intended for training purposes only. Do not use it for any other purpose.
- Ensure the collar fits properly. A loose collar may not deliver consistent stimulation, while a too-tight collar can cause skin irritation or pressure necrosis.
- Do not leave the collar on your dog for more than 12 hours per day.
- Regularly check your dog's neck for signs of irritation or sores. If irritation occurs, discontinue use until the skin heals.
- The remote control is not waterproof. Keep it dry.
- Keep out of reach of children.

Package Contents

- 1 x Remote Transmitter
- 1 x Receiver Collar (Blue)
- 1 x Adjustable Nylon Strap
- 1 x USB Charging Cable (Dual-head)
- 1 x Test Light Tool
- 4 x Contact Points (2 short, 2 long)
- 4 x Conductive Silicone Caps

- 1 x User Manual

Setup

1. Charging the Device

Before first use, fully charge both the remote transmitter and the receiver collar. Use the provided dual-head USB charging cable to charge both units simultaneously.

Your browser does not support the video tag.

Video: Product Overview and Charging. This video demonstrates how to charge both the remote and the collar using the included dual-head USB cable.

1. Connect the charging cable to the charging ports on both the remote and the receiver.
2. Plug the USB end into a power adapter (not included).
3. The indicator lights will show charging status. A full charge typically takes 2 hours.
4. Remove the screen film from the remote before use.

2. Attaching Contact Points and Silicone Caps

Select the appropriate length of contact points (short for short-haired dogs, long for long-haired dogs) and attach the conductive silicone caps for comfort and safety.

3. Fitting the Collar

The collar should fit snugly, allowing two fingers to fit between the strap and your dog's neck. The contact points must touch your dog's skin to be effective. If the strap is too long, it can be trimmed.



Image: Adjustable Collar for Dogs. This image illustrates the adjustable nature of the collar, suitable for dogs weighing 20-140 lbs with neck sizes 12-25 inches. It also shows that the excess strap can be cut off.



Image: Collar Fit Guide. This image provides a visual guide for fitting the collar, showing it on various dog breeds and indicating that it is suitable for medium to large dogs (20-140 lbs) and not for small dogs.

4. Pairing the Remote and Receiver (for multiple collars or re-pairing)

If you are using only one collar, this step may be skipped as the set is already factory-paired.

Your browser does not support the video tag.

Video: How to Use It in Pairing? This video demonstrates the pairing process for the remote and receiver collar, including how to pair a second collar.

1. Turn on the remote transmitter.
2. Select "Dog 1" or "Dog 2" channel on the remote.
3. Touch the magnetic red dot on the remote to the magnetic red dot on the receiver for 5 seconds. The receiver's red and green lights will flash, indicating pairing mode.
4. Press both the "Tone" button and the "Vibra" button on the remote simultaneously to complete pairing.

Operating Instructions

1. Turning On/Off the Receiver Collar

The receiver collar features an innovative magnetic switch. To turn on or off the receiver, touch the magnetic red dot of the remote to the magnetic red dot of the receiver for 5 seconds.



Image: Innovative Magnetic Switch. This image highlights the magnetic switch feature on both the remote and the collar, allowing for easy power control of the receiver.

Your browser does not support the video tag.

Video: Innovative Magnetic Switch. This video demonstrates how to use the magnetic switch on the remote to turn the collar receiver on and off.

2. Training Modes

The PUPKIDS T223 offers 4 versatile training modes:

- **Tone Mode (1-8 levels):** Delivers an audible tone.
- **Vibration Mode (1-8 levels):** Delivers a gentle vibration.
- **Static Mode (0-100 HI levels):** Delivers a static stimulation.
- **Night-Light Modes (3 modes):** Provides visibility in low-light conditions.



Image: Four Effective Powerful Modes. This image displays the remote control and lists the four training modes: Night-Light (3 modes), Static (0-100 HI), Vibra (1-8 Levels), and Tone (1-8 Levels).

Your browser does not support the video tag.

Video: Test Function Before Use. This video demonstrates how to test the static, vibration, and tone functions of the collar using the test light tool and the remote.

3. Adjusting Intensity Levels

To adjust the intensity level for Tone, Vibration, or Static modes:

1. Press the intensity dial down to switch between Static, Vibra, or Tone modes.

2. Turn the dial left to increase the level ("+") or right to decrease the level ("-").



Image: Easy to Adjust Training Levels. This image illustrates the remote's intensity dial and buttons for switching between modes and adjusting levels. It also shows the safety lock feature.

4. Night-Light Modes

The collar features three anti-lost night-light modes for enhanced visibility:

- Seven-color breathing lights
- Colorful streamer lights
- High-brightness LEDs

To activate or change night-light modes:

- Long-press the light button on the remote to turn the light on/off.
- Short-press the light button to switch between the different light modes.

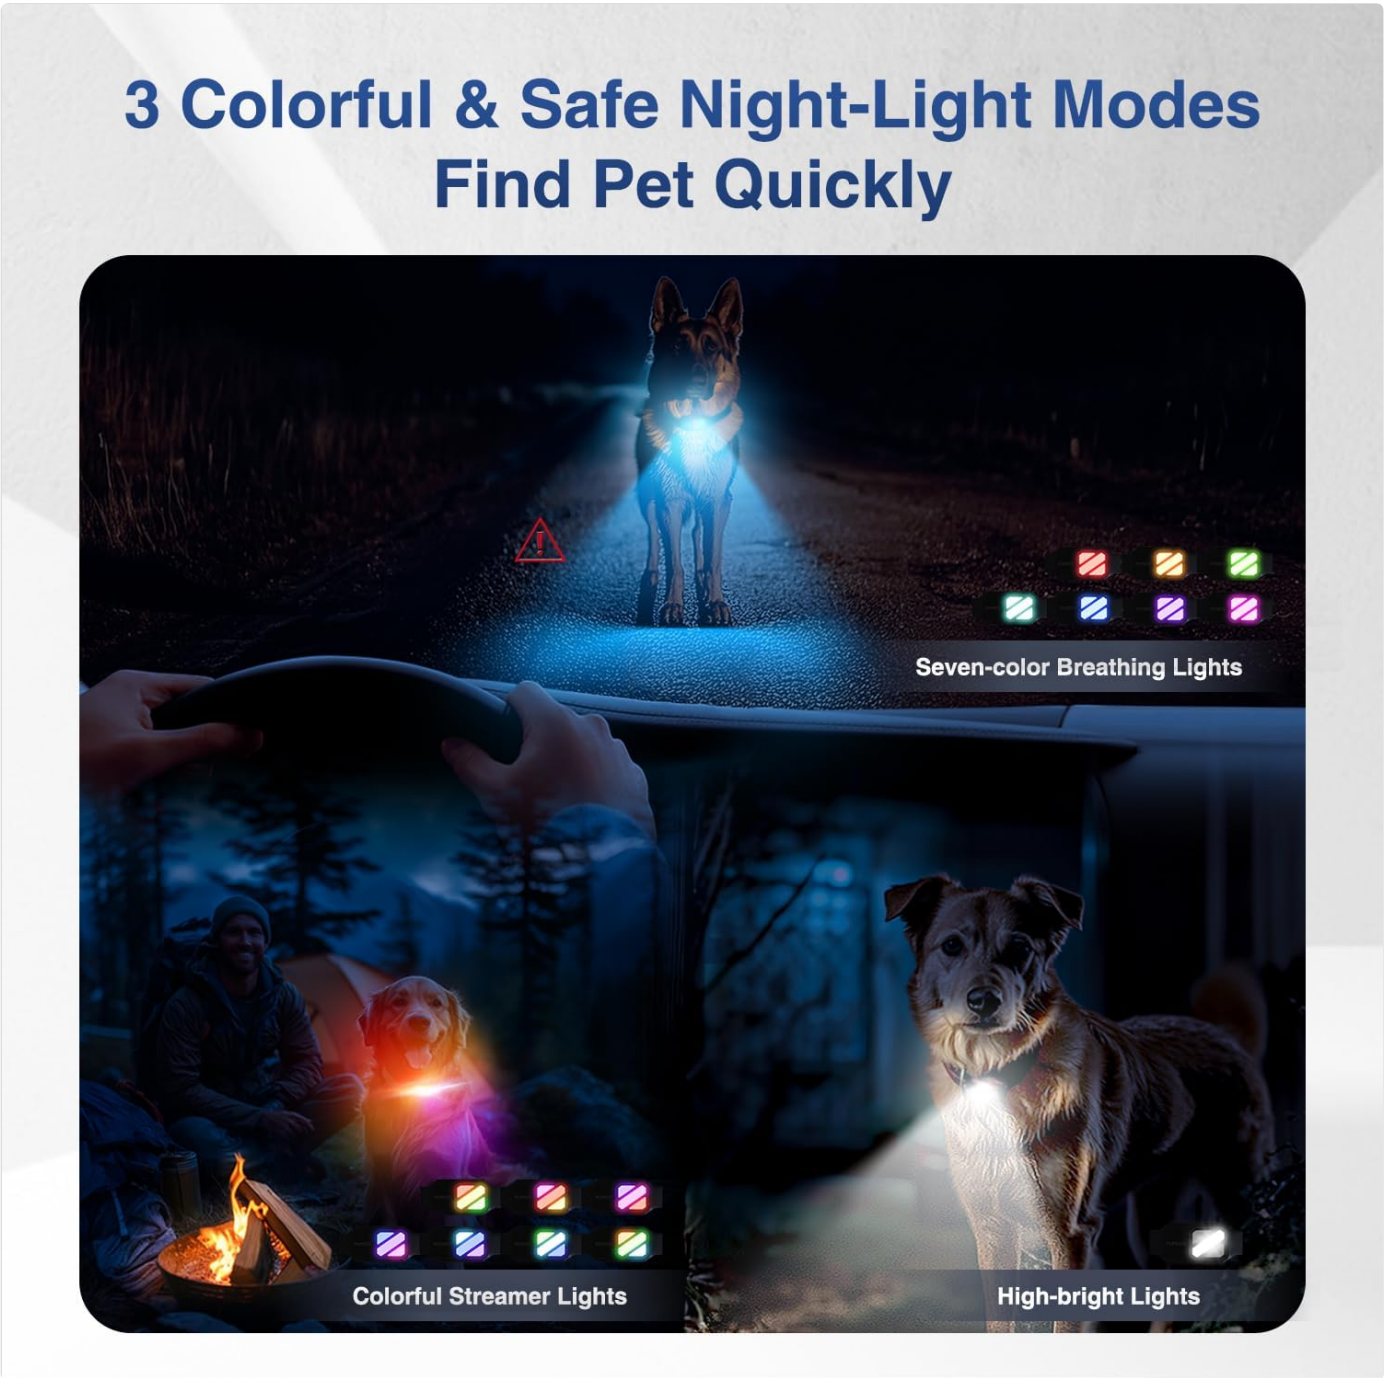


Image: 3 Colorful & Safe Night-Light Modes. This image demonstrates the three night-light modes (seven-color breathing lights, colorful streamer lights, high-bright lights) on the collar, enhancing pet visibility in low-light conditions.

Your browser does not support the video tag.

Video: PUPKIDS Training Collar T223 with 3 Anti-Lost Night-Lights. This video showcases the three night-light modes of the T223 collar, including high-bright lights, seven-color breathing lights, and colorful streamer lights.

5. Locking/Unlocking Channels

To prevent accidental touches on the remote:

- Press the 1/2 button for 5 seconds to lock the selected channel (Dog 1 or Dog 2).
- Press the 1/2 button for 5 seconds again to unlock the channel.

Maintenance

- Regularly inspect the collar and contact points for any damage or wear.

- Clean the collar and contact points with a damp cloth as needed. Ensure they are dry before re-use.
- Keep the charging ports clean and free of debris.
- Store the device in a cool, dry place when not in use.



Image: 100% IPX7 Waterproof Dog Collar. This image shows a dog in water, emphasizing that the collar receiver is IPX7 waterproof, suitable for swimming, rainy days, and bathing. Note: The remote is not waterproof.

Troubleshooting

Problem	Possible Cause	Solution
Collar not responding to remote.	Low battery on remote or receiver; not paired; out of range.	Charge both units; re-pair the devices; ensure within 4200ft range.

Problem	Possible Cause	Solution
No static stimulation.	Contact points not touching skin; static level too low; test light not used correctly.	Adjust collar fit; increase static level; use test light tool to verify function.
Skin irritation on dog's neck.	Collar too tight; worn for too long; improper contact point length.	Loosen collar; limit wear time to 12 hours; use appropriate contact points and silicone caps.
Remote screen is off.	Screen auto-sleep; low battery.	Press any button to wake screen; charge remote.

Specifications

- **Model:** T223
- **Brand:** PUPKIDS
- **Recommended Dog Weight:** 20-140 lbs
- **Adjustable Neck Size:** 12-25 inches
- **Training Modes:** Tone (1-8 levels), Vibration (1-8 levels), Static (0-100 HI levels), Night-Light (3 modes)
- **Remote Range:** Up to 4200 feet (unobstructed)
- **Waterproof Rating (Receiver):** IPX7
- **Charging Time:** Approximately 2 hours
- **Battery Type:** 2 Nonstandard Battery batteries (included)
- **Material:** Nylon (collar strap)
- **Item Weight:** 14 ounces

Warranty and Support

The PUPKIDS T223 Dog Training Collar comes with a 1-Year Manufacturer Warranty.
For any questions, concerns, or support needs, please contact PUPKIDS customer service:

- **Email:** support@pupkids.net
- Customer support is available 24 hours/7 days.

Image: Fast Customer Support. This image provides the email address for customer support: support@pupkids.net, available 24/7.

© 2026 PUPKIDS. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question