

[Manuals.plus](#) /

› [Daoseolo](#) /

› Daoseolo 31.4-inch Modern Outdoor LED Wall Sconce Instruction Manual

Daoseolo TC-FTBD-TG-80-2pc

Daoseolo 31.4-inch Modern Outdoor LED Wall Sconce Instruction Manual

Model: TC-FTBD-TG-80-2pc

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Daoseolo 31.4-inch Modern Outdoor LED Wall Sconce. Please read these instructions carefully before installation and retain for future reference. This product is designed for outdoor use, featuring adjustable color temperature and dimmable brightness, controlled via a remote.



Image: The Daoseolo 31.4-inch Modern Outdoor LED Wall Sconce, showcasing its sleek black aluminum design and illuminated acrylic diffuser.

SETUP AND INSTALLATION

Important Safety Information: Always turn off power at the circuit breaker before beginning installation. If you are unsure about electrical wiring, consult a qualified electrician. This fixture is hardwired and requires AC 85-265V. The width of this outdoor light fixture may not cover standard North American electrical boxes.

1. Step 1: Prepare the Mounting Surface

Mark the desired installation location on the wall. Using a drill, punch corresponding holes on the wall according to the hole positions on the mounting plate (pegboard). Insert wall anchors into the drilled holes.

HOW TO INSTALL

-STEP1:

PUNCH THE CORRESPONDING HOLES ON THE WALL ACCORDING TO THE HOLE POSITION OF THE PEGBOARD

— Wall light installation

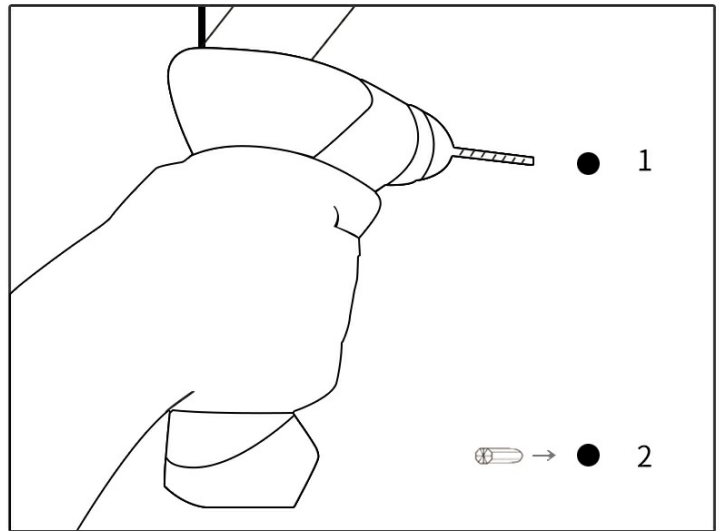


Image: Diagram showing a hand drilling holes into a wall and inserting wall anchors.

2. Step 2: Secure the Mounting Plate

Align the mounting plate with the drilled holes. Use screws to fix the mounting plate securely to the wall. Ensure the plate is firmly attached and level.

HOW TO INSTALL

-STEP2:

USE THE HANGING PLATE CORRESPONDING TO THE CORRESPONDING HOLE POSITION, AND FIX THE PLATE TO THE WALL WITH SCREWS

— Wall light installation

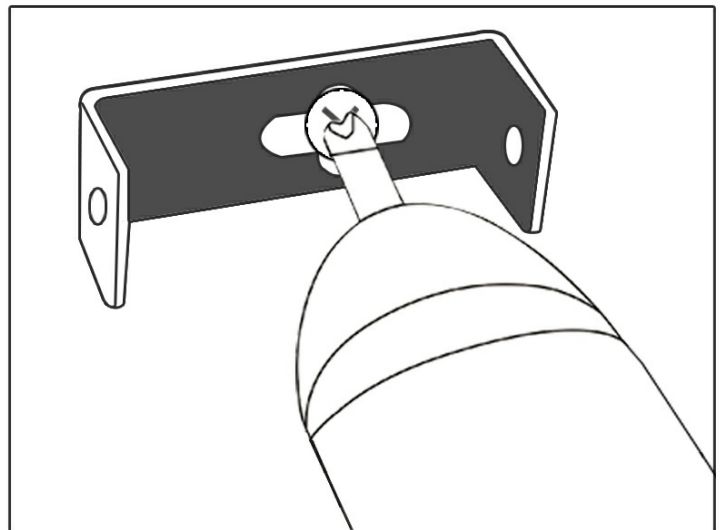


Image: Diagram illustrating the mounting plate being screwed into the wall.

3. Step 3: Wire the Fixture

Connect the fixture's wires to your household electrical wires according to the corresponding colors: Blue (Zero Line), Yellow (Ground Wire), and Red (Line of Fire). Use wire nuts to secure connections. Ensure all connections are tight and insulated.

HOW TO INSTALL

-STEP3:

LINK THE CORRESPONDING WIRE ACCORDING TO THE CORRESPONDING COLOR

— Wall light installation

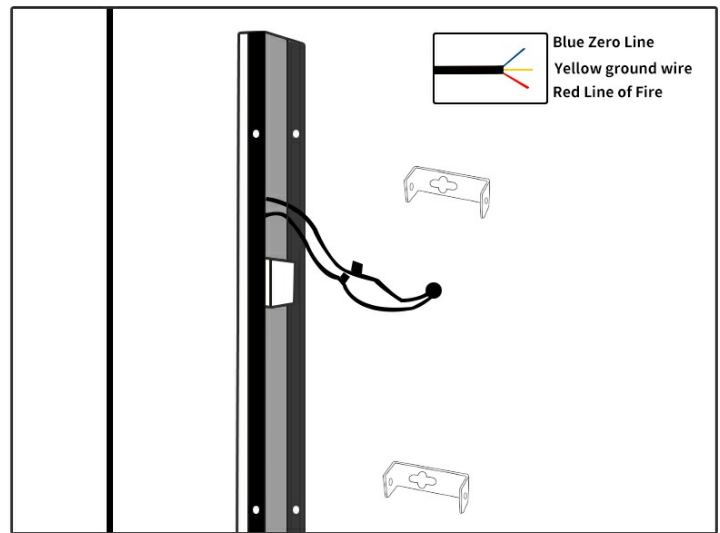


Image: Diagram showing the electrical wiring connections for the light fixture, with color-coded wires.

4. Step 4: Install the Light Body

Carefully attach the light body onto the mounting plate. Fix it with screws and tighten them using a screwdriver until the fixture is secure against the wall. Restore power at the circuit breaker.

HOW TO INSTALL

-STEP4:

INSTALL THE LIGHT BODY ON THE PEGBOARD, FIX IT WITH SCREWS, AND TIGHTEN THE SCREWS WITH A SCREWDRIVER

— Wall light installation

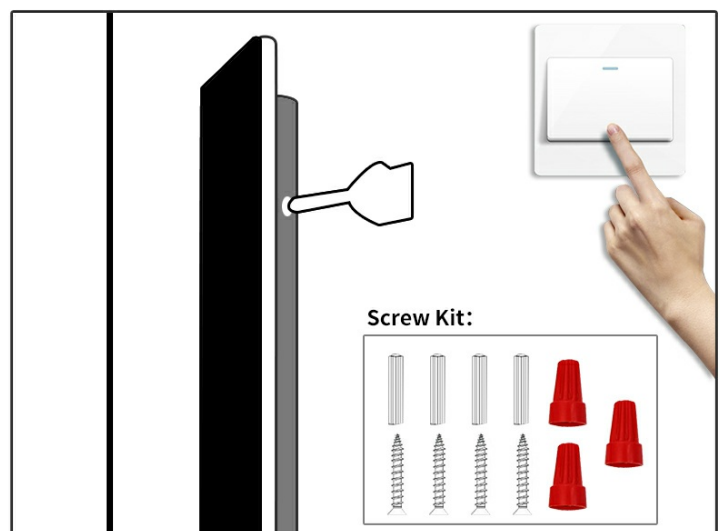


Image: Diagram depicting the light fixture being secured to the mounting plate and a hand operating a wall switch.

OPERATING INSTRUCTIONS

Your Daoseolo LED Wall Sconce offers customizable lighting options via the included remote control. The light supports both wall switch and remote control switch modes. It is **not compatible** with dimmer switches.

Remote Control Functions

- **Power On/Off:** Press the power button to turn the light on or off.
- **Color Temperature Adjustment:** Adjust the color temperature from warm white (3000K) to cool white (6000K) using the dedicated buttons or slider on the remote.
- **Brightness Dimming:** Adjust the brightness from 10% to 100% using the dimming buttons or slider on the remote.
- **Memory Function:** If the light is illuminated for 10 seconds or longer with specific color temperature and brightness settings, it will retain these settings the next time it is turned on via the remote control. Note that the wall switch cannot retain the memory function of the remote control settings.



NOT compatible with
any dimmalbe switches



Only accept a regular on
and off switch



With remote control
(without batteries)

Image: Visual representation of warm (3000K), neutral (4500K), and white (6000K) light, along with a dimming scale and compatible control methods (regular switch, remote control).

Official Product Video



Video: A demonstration of the Dimmable Modern Outdoor LED Wall Sconces, showcasing their features and functionality, including color temperature and brightness adjustments.

MAINTENANCE

To ensure the longevity and optimal performance of your LED wall sconce, follow these maintenance guidelines:

- **Cleaning:** Regularly wipe the fixture with a soft, damp cloth. Avoid using abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or acrylic diffuser.
- **Inspection:** Periodically check the fixture for any signs of damage, loose connections, or wear. Ensure the mounting screws remain tight.

- **Weather Protection:** Although the fixture has an IP65 waterproof rating, extreme weather conditions can still impact its lifespan. Ensure proper installation to prevent water ingress.

TROUBLESHOOTING

If you encounter issues with your Daoseolo LED Wall Sconce, refer to the following common problems and solutions:

- **Light does not turn on:**
 - Check the circuit breaker to ensure power is supplied to the fixture.
 - Verify all electrical connections are secure and correctly wired.
 - Ensure the remote control batteries are installed correctly and are not depleted.
- **Remote control not working:**
 - Replace the batteries in the remote control.
 - Ensure there are no obstructions between the remote and the light fixture.
- **Light flickers or dims unexpectedly:**
 - Confirm that the fixture is not connected to a dimmer switch, as it is not compatible.
 - Check for stable power supply.
- **Acrylic diffuser cracking:**
 - While designed for outdoor use, extreme temperature fluctuations or direct, prolonged intense sunlight in certain climates may affect the acrylic. If cracking occurs, contact customer support for assistance.

SPECIFICATIONS

PARAMETER

- **Brand:** Daoseolo
- **Installation Type:** Hard-wired
- **Parametric:** 31.5in+2.36in
- **Voltage:** AC85-265V
- **Waterproof Rating:** IP65
- **Power:** 24-36W
- **Material:** Iron+acrylic



LED Light source

Image: Diagram detailing the dimensions (31.5in x 2.36in x 1.3in) and key parameters of the wall sconce.

Feature	Detail
Brand	Daoseolo
Model Number	TC-FTBD-TG-80-2pc
Size (L*W*T)	31.4 x 2.3 x 1.3 inches (80 x 6 x 3.5 cm)
Color	Dimmable With Remote Control (Black Aluminium)
Installation Type	Wall Mount, Hardwired
Control Method	Remote Control, Wall Switch (not compatible with dimmer switches)
Lighting Method	LED
Color Temperature	3000K-6000K (Adjustable)

Feature	Detail
Brightness	10%-100% (Dimmable)
Lumen Output	2900 lumens
Wattage	31W
Input Voltage	AC 85-265V
Waterproof Rating	IP65
Material	Aluminium, Acrylic
Lifespan	Up to 50,000 hours

WARRANTY INFORMATION

Daoseolo is committed to customer satisfaction. If your outdoor wall lights have any defects, we offer a hassle-free, free replacement. Please contact our customer support team for assistance with any warranty claims.

CUSTOMER SUPPORT

For any issues with installation, operation, or general inquiries, our dedicated support team is available 24/7. Please contact us directly, and we will provide a solution within 24 hours.

Contact Information: Refer to your purchase documentation or the Daoseolo brand store on Amazon for the most current contact details.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0GCZR5Z1T>

More documents and user manuals: <https://manuals.plus/>