Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

PUPKIDS T223

PUPKIDS Dog Training Collar T223 User Manual

Model: T223

1. Introduction

Thank you for choosing the PUPKIDS Dog Training Collar T223. This device is designed to assist in effective and humane dog training, offering four versatile modes and a long-range remote control. It is suitable for medium to large dogs weighing between 20-140 lbs. Please read this manual thoroughly before use to ensure proper operation and safety for your pet.

2. Important Safety Information

- **Not for Small Dogs:** This collar is designed for dogs weighing 20-140 lbs. Do not use on dogs under 20 lbs.
- **Collar Fit:** Ensure the collar fits snugly but not too tightly. It should be possible to fit two fingers comfortably under the collar.
- **Wear Duration:** Do not leave the collar on your dog for more than 12 hours per day to prevent skin irritation.
- **Skin Monitoring:** Regularly check your dog's neck for any signs of irritation, redness, or sores. If irritation occurs, discontinue use and consult a veterinarian.
- **Supervision:** Always supervise your dog when the training collar is in use.
- **Remote Control:** The remote control is not waterproof. Keep it away from water.
- **Static Mode:** Use static stimulation responsibly and only after your dog understands tone and vibration commands. Start with the lowest level and increase gradually if necessary.

3. Package Contents

- PUPKIDS Dog Training Remote Control
- PUPKIDS Dog Training Collar Receiver
- Adjustable Nylon Collar Strap
- Dual Charging Cable
- Test Light Tool
- User Manual

4. Product Overview

The PUPKIDS Dog Training Collar T223 features an intuitive remote and a durable, waterproof receiver collar. Key components include:

4.1 Remote Control

- **LCD Display:** Shows battery level, selected dog, mode, and intensity levels.
- **Static Button:** Activates static stimulation.
- **Vibration Button:** Activates vibration.
- **Tone Button:** Activates audible tone.
- **Intensity Dial:** Adjusts levels for Static, Vibration, and Tone modes.
- **Channel Switch (1/2 button):** Selects between Dog 1 and Dog 2, or locks/unlocks channels.
- **Magnetic Dot:** Used for turning the receiver on/off and pairing.



Image: The remote control and collar, highlighting the four training modes: Night-Light, Static, Vibra, and Tone, along with their adjustable levels.

4.2 Receiver Collar

- **Contact Points:** Deliver static stimulation.
- **Night-Lights:** Seven-color breathing lights, colorful streamer lights, and high-brightness LEDs for visibility.
- **Charging Port:** USB-C port for recharging.
- **Magnetic Dot:** Used for turning the receiver on/off and pairing.
- **IPX7 Waterproof:** The receiver is fully waterproof, suitable for swimming and rainy conditions.



Image: The remote control and receiver collar, illustrating the innovative magnetic switch for powering the collar on and off.

5. Setup

5.1 Charging the Devices

Before first use, fully charge both the remote control and the receiver collar. Use the provided dual charging cable to charge both units simultaneously. A red light indicates charging, and a green light indicates a full charge.

Your browser does not support the video tag.

Video: Demonstrates the charging process for both the remote control and the receiver collar using the dual charging cable.



Image: The remote and collar connected to the dual charging cable, illustrating the quick charging capability and extended battery life.

5.2 Turning On/Off the Receiver

To turn the receiver collar on or off, first ensure the remote is powered on. Then, touch the magnetic red dot on the remote to the magnetic red dot on the receiver for 5 seconds. The receiver will indicate power status with a light.

Your browser does not support the video tag.

Video: Shows how to use the innovative magnetic switch on the remote to turn the receiver collar on and off.

5.3 Pairing the Collar (If not pre-paired)

If you are using a single collar, it is typically pre-paired from the factory. If you need to pair a new collar or re-pair an existing one:

1. Select the desired dog channel (Dog 1 or Dog 2) on the remote and ensure the corresponding collar is off.
2. Touch the magnetic red dot of the remote to the magnetic red dot of the receiver for 5 seconds. The receiver's red and green lights will flash, indicating pairing status.
3. While the lights are flashing, press both the "Tone" button and the "Vibra" button on the remote simultaneously to complete pairing.

Your browser does not support the video tag.

Video: A step-by-step guide on how to pair the PUPKIDS training collar with the remote control.

5.4 Fitting the Collar

Proper fit is crucial for the collar's effectiveness and your dog's comfort. The collar should sit high on your dog's neck, directly behind the ears. Ensure the contact points touch the skin. You should be able to fit two fingers snugly between the collar and your dog's neck. The strap is adjustable and can be trimmed if too long.



Image: Demonstrates the correct fit of the adjustable PUPKIDS training collar on a dog, suitable for breeds weighing 20-140 lbs.

5.5 Testing the Static Function

Before placing the collar on your dog, test the static function using the provided test light tool. Place the test light over the contact points on the receiver. Select the static mode on the remote and press the static button. The test light should illuminate, indicating the static function is working.

Your browser does not support the video tag.

Video: Instructions on how to test the static function of the PUPKIDS training collar using the included test light tool.

6. Operating Instructions

6.1 Selecting Dog Channels

The remote supports training for up to two dogs. Press the**1/2 button** to switch between Dog 1 and Dog 2. You can also select both channels to control two dogs simultaneously.

6.2 Locking/Unlocking Channels

To prevent accidental activation, you can lock the selected dog channel. Long-press the**1/2 button** for 5 seconds to lock the channel. Repeat the action to unlock it.

6.3 Adjusting Training Levels

The remote offers adjustable intensity levels for Static (0-100 HI), Vibration (1-8), and Tone (1-8). Press the intensity dial down to cycle through Static, Vibra, and Tone modes. Turn the dial left to decrease the level and right to increase it.



Image: The remote control illustrating how to use the intensity dial to adjust the levels for static, vibration, and tone modes.

6.4 Using Training Modes

The PUPKIDS T223 offers four training modes:

- **Tone Mode:** Delivers an audible beep. Use for initial commands or positive reinforcement.
- **Vibration Mode:** Provides a gentle vibration. Useful for getting your dog's attention or as a mild correction.
- **Static Mode:** Delivers a safe, low-frequency pulse. Use for behavior correction when other modes are ineffective. Start at the lowest effective level.
- **Night-Light Modes:** Enhance visibility in low-light conditions.



Image: The remote control and collar, showing the display for selecting and adjusting the four training modes.

6.5 Night-Light Operation

The receiver collar features three night-light modes for enhanced visibility:

- **Seven-color Breathing Lights:** Cycles through various colors.
- **Colorful Streamer Lights:** Dynamic color display.
- **High-brightness LEDs:** Provides strong white light.

To activate or change night-light modes, long-press the light button on the remote to turn the light on/off. Short-press the light button to switch between the different light modes.

Your browser does not support the video tag.

Video: Demonstrates the three anti-lost night-light modes of the PUPKIDS T223 training collar, enhancing visibility in the dark.

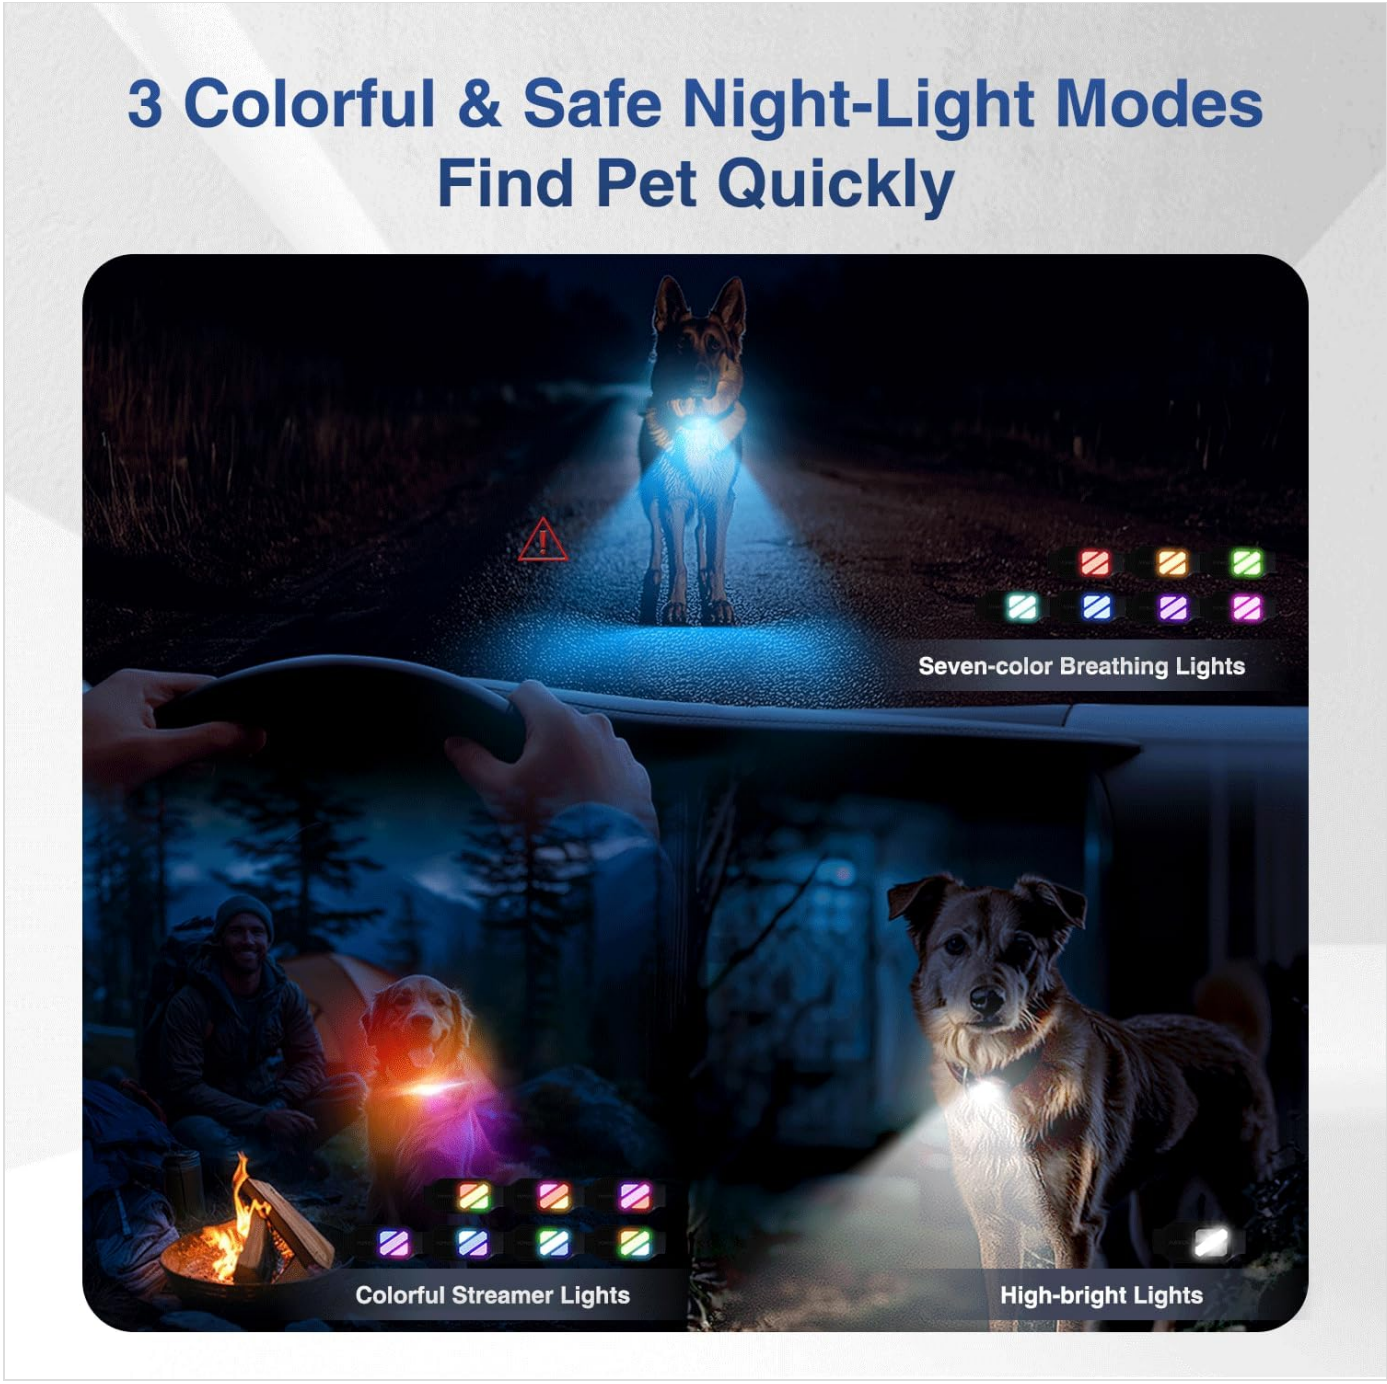


Image: Dogs wearing PUPKIDS collars, showcasing the three colorful and safe night-light modes for quick pet location in low-light environments.

7. Maintenance

- **Cleaning:** Regularly clean the collar and contact points with a damp cloth. Ensure the collar is dry before recharging.
- **Battery Care:** Charge the devices fully before long periods of inactivity. Store in a cool, dry place.
- **Waterproof Receiver:** The receiver is IPX7 waterproof, meaning it can withstand immersion in water up to 1 meter for 30 minutes. However, the remote is not waterproof.



Image: A golden retriever playing in water, demonstrating the IPX7 waterproof capability of the PUPKIDS dog collar receiver.

8. Troubleshooting

Problem	Possible Cause	Solution
Collar not responding to remote.	Low battery on either device, devices not paired, or out of range.	Charge both devices. Re-pair the collar and remote. Ensure devices are within 4200ft range.
Static stimulation not working.	Contact points not touching skin, static level too low, or test light not used correctly.	Adjust collar fit. Increase static level gradually. Use the test light tool to verify function.

Problem	Possible Cause	Solution
Dog shows signs of irritation.	Collar worn too long, too tight, or improper contact.	Remove collar immediately. Check for sores. Ensure proper fit and wear duration (max 12 hours). Consult a vet if needed.
Remote screen is blank.	Low battery or screen timeout.	Charge the remote. Press any button to wake the screen.

9. Specifications

Feature	Detail
Brand	PUPKIDS
Model Name	T223
Training Modes	Tone (1-8 levels), Vibration (1-8 levels), Static (0-100 HI levels), 3 Night-Light modes
Range	Up to 4200 feet (1400 yards) in open spaces
Waterproof Rating	Receiver: IPX7 (Waterproof); Remote: Not waterproof
Dog Size Suitability	20-140 lbs (Adjustable neck size 12-25 inches)
Battery Type	Rechargeable Nonstandard Battery (included)
Charging Time	Approx. 2 hours for full charge
Battery Life	Receiver: Up to 15 days (Work Time), 200 days (Standby Time); Remote: Up to 30 days (Work Time), 200 days (Standby Time)
Material	Nylon (Collar Strap)
Item Weight	13.7 ounces

10. Warranty and Support

The PUPKIDS Dog Training Collar T223 comes with a**12-month warranty**. For any product issues, questions, or support, please contact PUPKIDS customer service.
Customer Support: support@pupkids.net (Available 24 hours/7 days)
PUPKIDS is committed to providing a good purchasing and usage experience. Our team has excellent design and R&D capabilities, ensuring product quality and user satisfaction.

© 2026 PUPKIDS. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GCZSLW1Q

More documents and user manuals: **https://manuals.plus/**