

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [ATTACK SHARK](#) /
- › [ATTACK SHARK L30Pro Wireless Gaming Headset User Manual](#)

## ATTACK SHARK L30 Pro

# ATTACK SHARK L30Pro Wireless Gaming Headset User Manual

Model: L30 Pro

---

## INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your ATTACK SHARK L30Pro Wireless Gaming Headset. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.

## PACKAGE CONTENTS

Verify that all items are present in your package:

- ATTACK SHARK L30Pro Wireless Gaming Headset
- Detachable Microphone
- USB-A/USB-C 2.4GHz Wireless Dongle
- USB-C Charging Cable
- 3.5mm AUX Audio Cable
- User Manual (this document)

## PRODUCT OVERVIEW

Familiarize yourself with the headset's components and controls.

# 360° AI NOISE-CANCELING

- ① Detachable Microphone
- ② Built in Mic



Image: Headset with detachable microphone (1) and built-in microphone (2).

Device	2.4Ghz Wireless(USB Dongle)		Wired		Bluetooth	
	Sound	Mic	Sound	Mic	Sound	Mic
PC 	✓	✓	✓	✓	✓	✓
PS4/PS5 Console 	✓	✓	✓	✓	✗	✗
XBOX Series X Console 	✗	✗	✓	✓	✗	✗
PS4/PS5 Contoller 	✗	✗	✓	✓	✗	✗
XBOX Series X Contoller (old version requires adapter) 	✗	✗	✓	✓	✗	✗
Switch 	✓	✓	✓	✓	✓	✓
Mobile Phone (3.5mm/Type C) 	✓	✓	✓	✓	✓	✓
Tablet(3.5mm/Type c) 	✓	✓	✓	✓	✓	✓

**TIP:**In wired mode, only volume can be adjusted; other buttons are inactive.

Image: Detailed view of headset controls and ports.

## Controls and Ports:

- **Power Button:** Long press to power on/off.
- **M Button (Mode Switch):** Short press to switch between Music mode and Game mode. Double press to switch between Bluetooth mode and 2.4GHz mode.
- **Volume Roller:** Adjusts volume up or down.
- **Type-C Port:** Used for charging and wired audio connection.
- **3.5mm Mic Port:** For connecting the detachable boom microphone.
- **Indicator Light:** Green light for 2.4GHz mode, Blue light for Bluetooth mode.
- **Built-in Microphone:** For hands-free calls and general use when the detachable mic is not connected.

## SETUP AND CONNECTIVITY

The L30Pro headset offers three connection modes: 2.4GHz Wireless, Bluetooth 5.0, and 3.5mm Wired.



Image: Overview of the headset's quad-mode connection capabilities.

### 1. 2.4GHz Wireless Connection (USB Dongle)

This mode provides ultra-low latency connectivity for PC, PS4/PS5, Nintendo Switch, and other compatible devices.

1. Insert the USB-A/USB-C 2.4GHz dongle into an available USB port on your device (PC, console, etc.).
2. Power on the headset by long-pressing the Power button.
3. Ensure the headset is in 2.4GHz mode (Green indicator light). If not, double-press the 'M' button to switch modes.
4. The headset will automatically pair with the dongle.



Image: The 2-in-1 2.4GHz USB dongle and its compatibility.

*Note: To use the USB-A connection, the Type-C connector must be fully inserted into the transmitter's side.*

## 2. Bluetooth 5.0 Connection

Connect wirelessly to mobile devices, tablets, and other Bluetooth-enabled systems.

1. Power on the headset.
2. Double-press the 'M' button until the indicator light turns blue, indicating Bluetooth mode.
3. On your device, enable Bluetooth and search for "ATTACK SHARK L30Pro" in the list of available devices.
4. Select the headset to pair. The blue indicator light will become solid once connected.



Image: Bluetooth connectivity range and usage example.

## 3. 3.5mm Wired Connection

For universal compatibility with devices supporting a 3.5mm audio jack, including Xbox controllers (may require adapter for older versions).

1. Connect one end of the 3.5mm AUX audio cable to the headset's 3.5mm port.
2. Connect the other end to the 3.5mm audio jack on your device.
3. The headset will automatically switch to wired mode. In this mode, only volume can be adjusted; other buttons are inactive.

## Device Compatibility Table



Image: Comprehensive device compatibility chart.

## OPERATING INSTRUCTIONS

### Basic Headset Controls

- **Power On/Off:** Long press the Power button.
- **Play/Pause:** Short press the Power button (in Bluetooth mode).
- **Answer/End Call:** Short press the Power button during an incoming call (in Bluetooth mode).
- **Hang Up Call:** Hold and press the Power button during a call (in Bluetooth mode).
- **Previous Song:** Double press the Power button (in Bluetooth mode).
- **Next Song:** Triple press the Power button (in Bluetooth mode).
- **Switch Music/Game Mode:** Short press the 'M' button.
- **Switch Bluetooth/2.4GHz Mode:** Double press the 'M' button.
- **Volume Adjustment:** Use the volume roller.

### Microphone Usage

The headset features both a detachable boom microphone and a built-in microphone.

- **Detachable Microphone:** For optimal voice clarity and AI noise-canceling, attach the boom microphone to the 3.5mm mic port. This is recommended for gaming and critical communication.
- **Built-in Microphone:** Use for general calls or when the detachable microphone is not connected.



Image: Microphone options and features.

## 7.1 Surround Sound and Audio Tuning

The headset features 50mm bio-diaphragm drivers and custom-tuned 7.1 surround sound for immersive audio.



Image: Illustration of 50mm drivers and sound tuning.



Image: 7.1 Virtual Surround Audio in action.

### Software Customization (2.4GHz Mode Only)

Utilize the dedicated driver software for advanced audio customization. This software is only available when connected via 2.4GHz wireless dongle.

1. Connect the headset via the 2.4GHz dongle to your PC.
2. Download and install the ATTACK SHARK driver software from the official website (refer to product packaging or website for download link).
3. Within the software, you can:
  - Adjust EQ presets or create personalized sound profiles.
  - Configure 7.1 audio profiles for different game genres.
  - Fine-tune microphone settings, including AI noise-canceling.

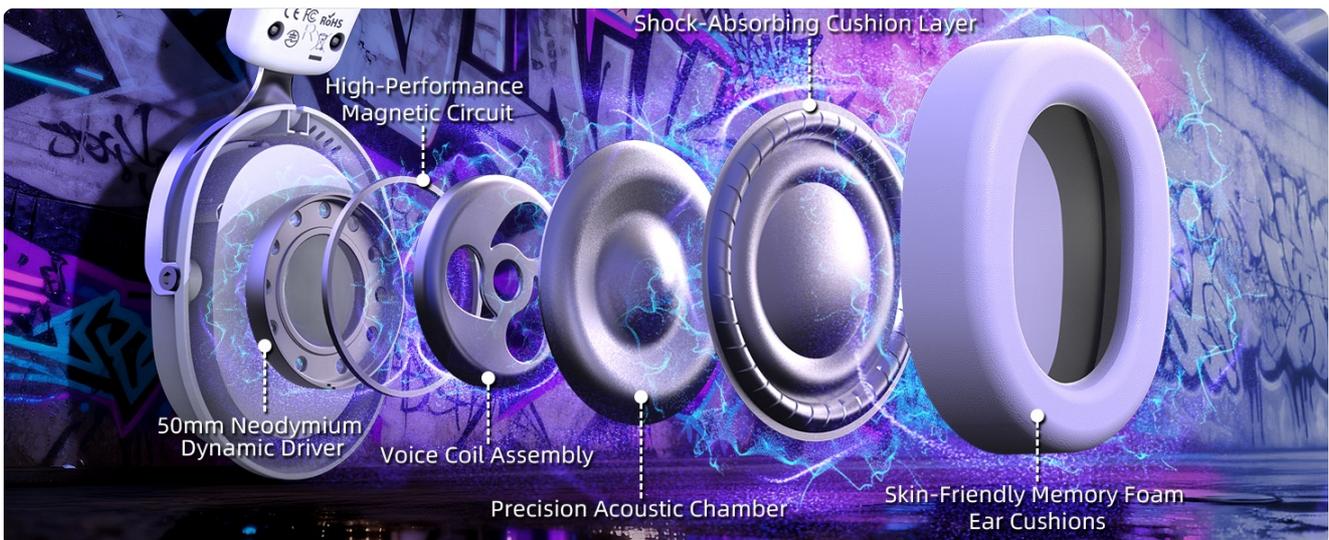


Image: Overview of the headset's software customization interface.

Device	2.4Ghz Wireless(USB Dongle)		Wired		Bluetooth	
	Sound	Mic	Sound	Mic	Sound	Mic
PC 	✓	✓	✓	✓	✓	✓
PS4/PS5 Console 	✓	✓	✓	✓	✗	✗
XBOX Series X Console 	✗	✗	✓	✓	✗	✗
PS4/PS5 Contoller 	✗	✗	✓	✓	✗	✗
XBOX Series X Contoller (old version requires adapter) 	✗	✗	✓	✓	✗	✗
Switch 	✓	✓	✓	✓	✓	✓
Mobile Phone (3.5mm/Type C) 	✓	✓	✓	✓	✓	✓
Tablet(3.5mm/Type c) 	✓	✓	✓	✓	✓	✓

**TIP:**In wired mode, only volume can be adjusted; other buttons are inactive.

Image: Custom equalizer and 7.1 surround sound settings in the software.

Note: Driver and settings are available in 2.4GHz mode only.

## CHARGING AND BATTERY LIFE

The headset is equipped with an 1100mAh battery for extended playtime.

- **Charging:** Connect the USB-C charging cable to the headset's Type-C port and a power source. The indicator light will show charging status.
- **Battery Life:** Enjoy up to 55 hours of playback on a full charge.
- **Power Saving:** The headset features an auto-shutdown function after 5 minutes of inactivity in 2.4GHz mode to conserve power.

LONG-LASTING BATTERY, BUILT FOR ESPORTS

1100mAh



Tips: No connection, power off after 5 minutes

Image: Headset highlighting its 1100mAh battery capacity.



Image: Battery life and capacity details.

## MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the headset. Avoid using harsh chemicals or abrasive materials.
- **Storage:** Store the headset in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the headset frequently. Charge it regularly, even if not in use for extended periods.
- **Microphone:** Handle the detachable microphone carefully. Avoid bending or twisting it excessively.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound/Low volume	<ul style="list-style-type: none"><li>◦ Headset not powered on.</li><li>◦ Volume too low.</li><li>◦ Incorrect connection mode.</li><li>◦ Device output settings incorrect.</li></ul>	<ul style="list-style-type: none"><li>◦ Ensure headset is powered on.</li><li>◦ Adjust headset and device volume.</li><li>◦ Verify correct mode (2.4GHz, BT, Wired) and switch if necessary using the 'M' button.</li><li>◦ Check audio output settings on your device (e.g., PC Sound Settings).</li></ul>
Microphone not working	<ul style="list-style-type: none"><li>◦ Microphone detached or not fully inserted.</li><li>◦ Microphone muted on device or software.</li><li>◦ Incorrect input device selected.</li></ul>	<ul style="list-style-type: none"><li>◦ Ensure detachable microphone is securely connected.</li><li>◦ Check device/game settings for microphone mute.</li><li>◦ Select "ATTACK SHARK L30Pro" as the input device in your system settings.</li></ul>
2.4GHz connection issues	<ul style="list-style-type: none"><li>◦ Dongle not properly inserted.</li><li>◦ Headset not in 2.4GHz mode.</li><li>◦ Interference.</li></ul>	<ul style="list-style-type: none"><li>◦ Re-insert the 2.4GHz dongle.</li><li>◦ Double-press 'M' button to ensure green indicator light is on.</li><li>◦ Move closer to the dongle or away from other wireless devices.</li></ul>
Bluetooth pairing failure	<ul style="list-style-type: none"><li>◦ Headset not in Bluetooth pairing mode.</li><li>◦ Device Bluetooth off.</li><li>◦ Headset already connected to another device.</li></ul>	<ul style="list-style-type: none"><li>◦ Double-press 'M' button until blue indicator light flashes.</li><li>◦ Ensure Bluetooth is enabled on your device.</li><li>◦ Disconnect from other devices or forget the headset from previous pairings.</li></ul>

## SPECIFICATIONS

Feature	Detail
Model Name	ATTACK SHARK L30 Pro
Connectivity Technology	2.4Ghz Wireless, Bluetooth 5.0, 3.5mm Wired (USB-C for charging/audio)
Audio Drivers	50mm Bio-diaphragm Dynamic Drivers
Surround Sound	7.1 Virtual Surround Sound

Feature	Detail
Microphone	Detachable AI Noise-Canceling Boom Mic, Built-in Mic
Battery Capacity	1100mAh
Battery Life	Up to 55 hours playback
Bluetooth Range	Up to 30 meters (approx. 98 feet)
Impedance	20 Ohms
Ear Placement	Over Ear
Material	Metal (frame), Protein Leather (ear cushions)
Item Weight	1.14 pounds (approx. 517 grams)
Special Features	Noise Cancellation, Surround Sound, AI Noise-Canceling Microphone, Customizable Audio Profiles (via software)



Image: Internal components and construction of the headset.



Image: Headset dimensions for fit reference.

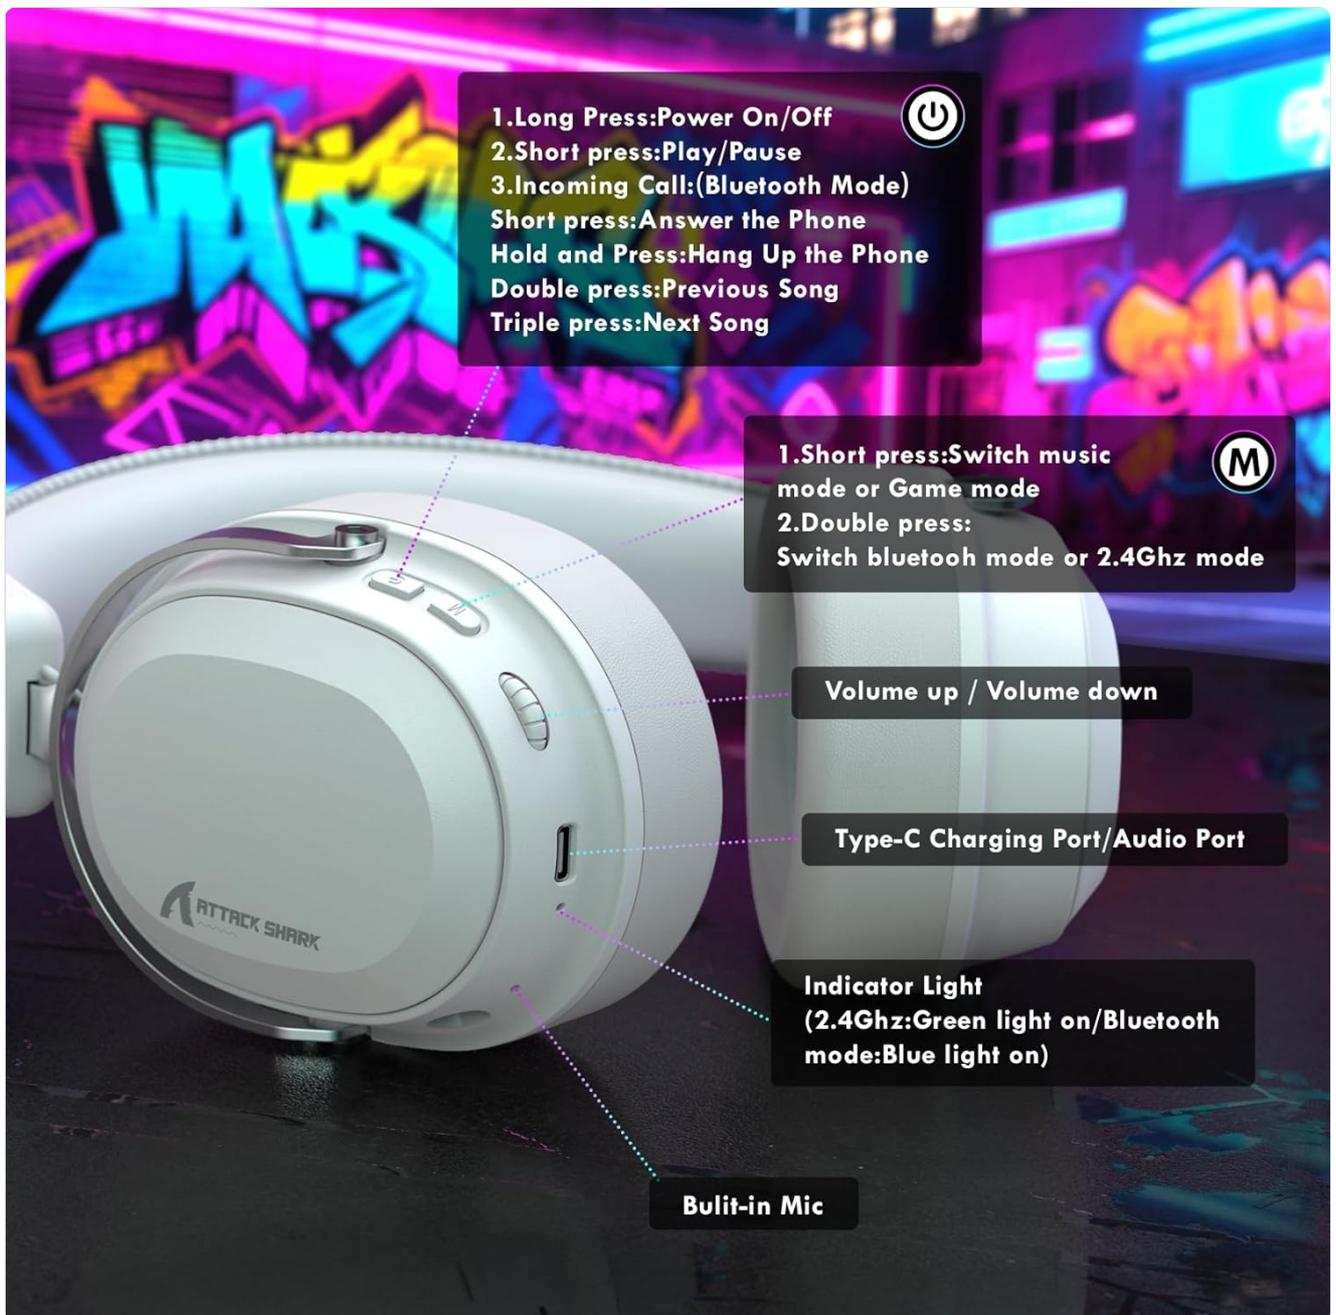


Image: Ergonomic design features for comfort.

## WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official ATTACK SHARK website or contact their customer service directly. Keep your purchase receipt as proof of purchase for warranty claims.

**Manufacturer:** ATTACK SHARK

**Website:** [Visit the ATTACK SHARK Store on Amazon](#)