Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

iphoenix IP760

iphoenix IP760 Portable Bluetooth Speaker User Manual

Model: IP760

Introduction

Thank you for choosing the iphoenix IP760 Portable Bluetooth Speaker. This manual provides essential information for setting up, operating, and maintaining your speaker to ensure optimal performance and longevity. Please read it thoroughly before use.



Image: The iphoenix IP760 Portable Bluetooth Speaker, showcasing its sleek design and RGB lighting.

Package Contents

Ensure all items are present in the package:

- iphoenix IP760 Portable Bluetooth Speaker
- USB Type-C Charging Cable
- Auxiliary Audio Cable
- User Manual (this document)

Setup

1. Charging the Speaker

Before first use, fully charge the speaker. Connect the provided USB Type-C charging cable to the speaker's charging port and the other end to a USB power adapter (not included) or a computer's USB port. The charging indicator light will show the charging

status and turn off when fully charged. A full charge provides up to 12 hours of playtime.



Image: The iphoenix IP760 speaker connected via USB-C, also capable of charging other devices.

2. Powering On/Off

- **Power On:** Press and hold the Power button for approximately 3 seconds until you hear an audible prompt and the RGB lights illuminate.
- **Power Off:** Press and hold the Power button for approximately 3 seconds until you hear an audible prompt and the RGB lights turn off.

3. Bluetooth Pairing

The speaker automatically enters Bluetooth pairing mode when powered on for the first time or if no device is connected. The Bluetooth indicator light will flash.

1. Ensure your speaker is powered on and in pairing mode.
2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
3. Select "IP760" from the list of devices.

4. Once connected, you will hear a confirmation sound, and the Bluetooth indicator light will remain solid.

The speaker will automatically reconnect to the last paired device when powered on, if it is within range.

4. True Wireless Stereo (TWS) Pairing

For an enhanced stereo experience, you can pair two IP760 speakers together.

1. Ensure both IP760 speakers are powered on and not connected to any Bluetooth device.
2. On one speaker (this will be the primary speaker), press the TWS button (often indicated by a chain link icon). The speaker will enter TWS pairing mode.
3. The primary speaker will automatically search for and connect to the secondary speaker.
4. Once paired, you will hear a confirmation sound, and the TWS indicator lights on both speakers will remain solid.
5. Now, connect your device to the primary speaker via Bluetooth as described in step 3. Both speakers will play audio in stereo.



Image: Two iphoenix IP760 speakers wirelessly connected, illustrating True Wireless Stereo (TWS) pairing.

Operating Instructions

1. Button Functions

Button	Function (Short Press)	Function (Long Press)
Power Button	Play/Pause (in Bluetooth mode), Answer/End Call	Power On/Off
Volume Up (+)	Increase Volume	Next Track
Volume Down (-)	Decrease Volume	Previous Track
Mode Button (M)	Switch Playback Mode (Bluetooth, TF Card, USB, AUX, FM Radio)	N/A
Light Button	Change RGB Light Mode	Turn RGB Lights On/Off
TWS Button	Initiate TWS Pairing (primary speaker)	Disconnect TWS Pairing

2. Playback Modes

- **Bluetooth Mode:** Connect wirelessly to your device.
- **TF Card Mode:** Insert a TF (MicroSD) card with audio files into the TF card slot. The speaker will automatically play music from the card.
- **USB Drive Mode:** Insert a USB flash drive with audio files into the USB port. The speaker will automatically play music from the drive.
- **AUX Mode:** Connect an external audio device using the provided 3.5mm auxiliary cable. The speaker will automatically switch to AUX mode.
- **FM Radio Mode:** In FM mode, short press the Power button to auto-scan and save available radio stations. Use the Volume +/- buttons (long press) to switch between saved stations.

3. Dynamic RGB Lights

The speaker features dynamic RGB lighting with multiple modes. Short press the Light button to cycle through different light effects, including breathing and rhythm-syncing modes. Long press the Light button to turn the RGB lights on or off.



Image: The iphoenix IP760 speaker displaying vibrant RGB lights in an outdoor setting.

4. Hands-Free Calling

When connected via Bluetooth, the speaker's built-in microphone allows for hands-free calls.

- **Answer Call:** Short press the Power button.
- **End Call:** Short press the Power button during a call.
- **Reject Call:** Long press the Power button when an incoming call rings.

Maintenance

1. Cleaning

Wipe the speaker with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners. Ensure all ports are dry before charging or connecting other devices.

2. Water Resistance (IPX6)

The IP760 speaker is IPX6 water-resistant, meaning it can withstand powerful water jets. It is suitable for use near pools, beaches, or in rainy conditions. However, it is not designed to be submerged in water. Ensure the charging port cover is securely closed to maintain water resistance.



Image: The iphoenix IP760 speaker, wet from splashes, demonstrating its IPX6 water resistance near a body of water.

3. Storage

Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended period, charge the battery to approximately 50% every few months to preserve battery life.

Troubleshooting

Problem	Possible Solution
Speaker does not power on.	Ensure the battery is charged. Connect the speaker to a power source using the USB Type-C cable.

Problem	Possible Solution
Cannot pair via Bluetooth.	◦ Ensure the speaker is in Bluetooth pairing mode (flashing indicator). ◦ Make sure your device's Bluetooth is enabled and within 10 meters (33 ft) of the speaker. ◦ Forget "IP760" from your device's Bluetooth list and try pairing again. ◦ Restart both the speaker and your device.
No sound or low volume.	◦ Increase the volume on both the speaker and your connected device. ◦ Ensure the speaker is correctly paired or connected via AUX/TF/USB. ◦ If using AUX, check the cable connection.
TWS pairing fails.	◦ Ensure both speakers are powered on and not connected to any other Bluetooth device. ◦ Place speakers close to each other during TWS pairing. ◦ Try resetting both speakers and repeating the TWS pairing process.
RGB lights are not working.	Short press the Light button to cycle through modes, or long press to ensure they are not turned off.

SPECIFICATIONS

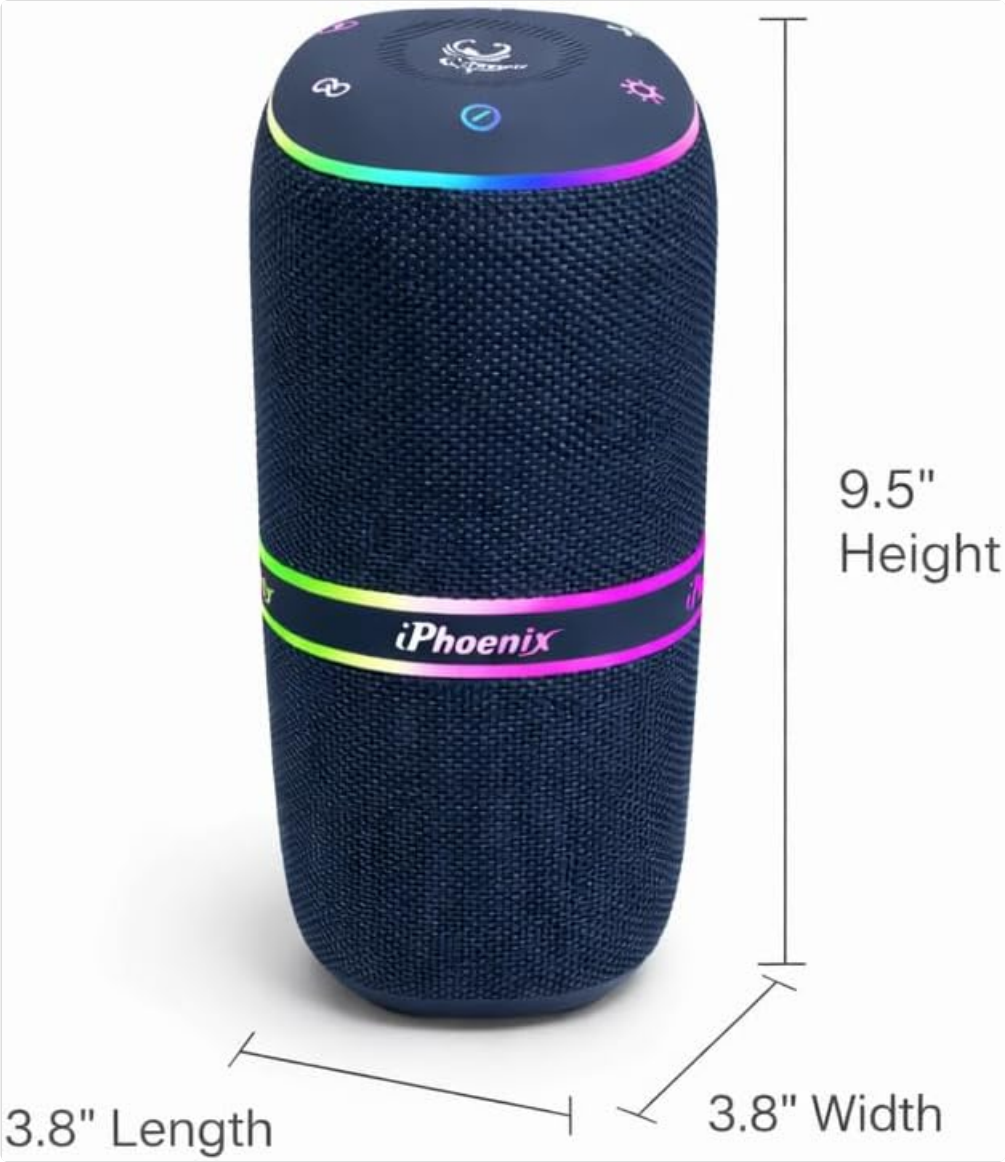


Image: Dimensions of the iphoenix IP760 speaker: 3.8"D x 3.8"W x 9.5"H.

Feature	Detail
Model Number	IP760
Brand	iphoenix
Speaker Output Power	30 watts
Frequency Response	100 hertz
Connectivity Technology	Wireless (Bluetooth)
Audio Output Mode	Stereo
Additional Features	Bass Boost, Built-In Microphone, USB Port, Waterproof, Dynamic RGB Lights, TWS Pairing
Waterproof Rating	IPX6
Bluetooth Range	10 meters (33 feet)
Battery Life	Up to 12 hours
Item Dimensions (D x W x H)	3.8"D x 3.8"W x 9.5"H

Feature	Detail
Item Weight	2.8 pounds
Connectivity Protocols	Bluetooth, USB, AUX, FM

Warranty

iphoenix is committed to your complete satisfaction. We offer comprehensive around-the-clock customer support and back our products with a 90-day money-back guarantee. Please retain your proof of purchase for warranty claims.

Support

For further assistance, troubleshooting, or warranty inquiries, please contact iphoenix customer support. Refer to the packaging or the official iphoenix website for the most current contact information.
You can also visit the iphoenix Store on Amazon for more product information and support resources.

© 2023 iphoenix. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GFGDYYN3

More documents and user manuals: **https://manuals.plus/**