



Manuals.plus /

› Vazone /

› Vazone S22 Cordless Vacuum Cleaner User Manual

Vazone S22

Vazone S22 Cordless Vacuum Cleaner User Manual

Model: S22 | Brand: Vazone

[Safety Instructions](#) [Product Components](#) [Setup & Assembly](#) [Operating](#)
[Instructions](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. IMPORTANT SAFETY INSTRUCTIONS

Please read all instructions carefully before using the Vazone S22 Cordless Vacuum Cleaner. Retain this manual for future reference.

- This appliance is for household use only. Do not use outdoors or on wet surfaces.
- Do not allow children to operate the vacuum cleaner. Close supervision is necessary when used near children.
- Do not pick up flammable or combustible liquids, such as gasoline, or use in areas where they may be present.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Do not use without the dust cup and filters in place.
- Turn off the appliance before connecting or disconnecting the motorized brush head or other accessories.
- Use only as described in this manual. Use only manufacturer's recommended attachments.
- Do not handle the charger or appliance with wet hands.
- If the appliance is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, return it to a service center.

2. PRODUCT COMPONENTS

The Vazone S22 Cordless Vacuum Cleaner comes with various components designed for versatile cleaning. Refer to the image below for a visual guide to the included parts.

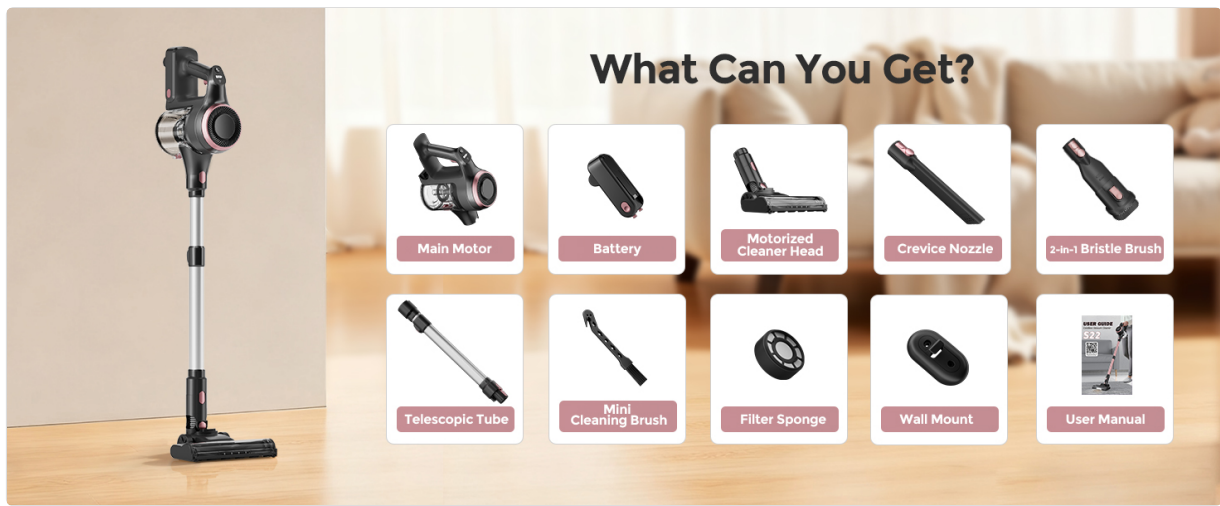


Figure 2.1: Included Components of the Vazone S22

- **Main Motor Unit:** Contains the motor, dustbin, and control panel.
- **Battery Pack:** Rechargeable 12V battery for cordless operation.
- **Motorized Cleaner Head:** For floor and carpet cleaning, featuring a tangle-free V-shaped dual bristles brush.
- **Telescopic Tube:** Adjustable extension for reaching various heights and converting to stick vacuum mode.
- **Crevice Nozzle:** Ideal for narrow spaces, corners, and edges.
- **2-in-1 Bristle Brush:** Combines a dusting brush and upholstery tool for versatile cleaning.
- **Mini Cleaning Brush:** For cleaning the main brush head and filters.
- **Filter Sponge:** Part of the multi-cone cyclone filtration system.
- **Wall Mount:** For convenient storage and charging.
- **User Manual:** This document.

3. SETUP & ASSEMBLY

3.1 Initial Charging

Before first use, fully charge the battery. The battery can be charged while attached to the main unit or separately. A full charge takes approximately 4-5 hours and provides up to 35-55 minutes of runtime depending on the suction mode.

Versatile Charging & Storage

Easily recharge with wall-mount storage, direct charging, or separate battery charging.



Figure 3.1: Versatile Charging Options

3.2 Assembly Steps

Follow these steps to assemble your Vazone S22 Cordless Vacuum Cleaner:

1. **Attach the Nozzle:** Connect the desired cleaning nozzle (e.g., motorized cleaner head, crevice tool) to the end of the telescopic tube or directly to the main motor unit until it clicks securely into place.
2. **Connect the Extension Tube:** If using as a stick vacuum, connect the telescopic tube to the main motor unit. Ensure it is firmly attached.
3. **Install the Dustbin:** Ensure the dust cup is securely locked in place on the main motor unit. Refer to Figure 3.2 for dust cup installation.
4. **Insert the Battery:** Slide the charged battery pack into the designated slot on the main motor unit until it clicks.

Quick & Easy Installation

Follow these simple steps to assemble your vacuum effortlessly



Step 01

Attach the nozzle with a secure click



Step 02

Connect the extension tube seamlessly



Step 03

Lock the dustbin in place for a secure fit



Step 04

Insert the battery pack for instant power

Figure 3.2: Quick & Easy Installation Steps

Dust Cup Installation Steps



Figure 3.3: Dust Cup Installation Steps

4. OPERATING INSTRUCTIONS

4.1 Powering On/Off and Suction Modes

To power on the vacuum, press the power button located on the main motor unit. The LED display will illuminate, showing the current suction mode and battery level. Press the suction mode button to cycle between Standard (30KPa) and Max (45KPa) suction settings. To turn off the vacuum, press the power button again.

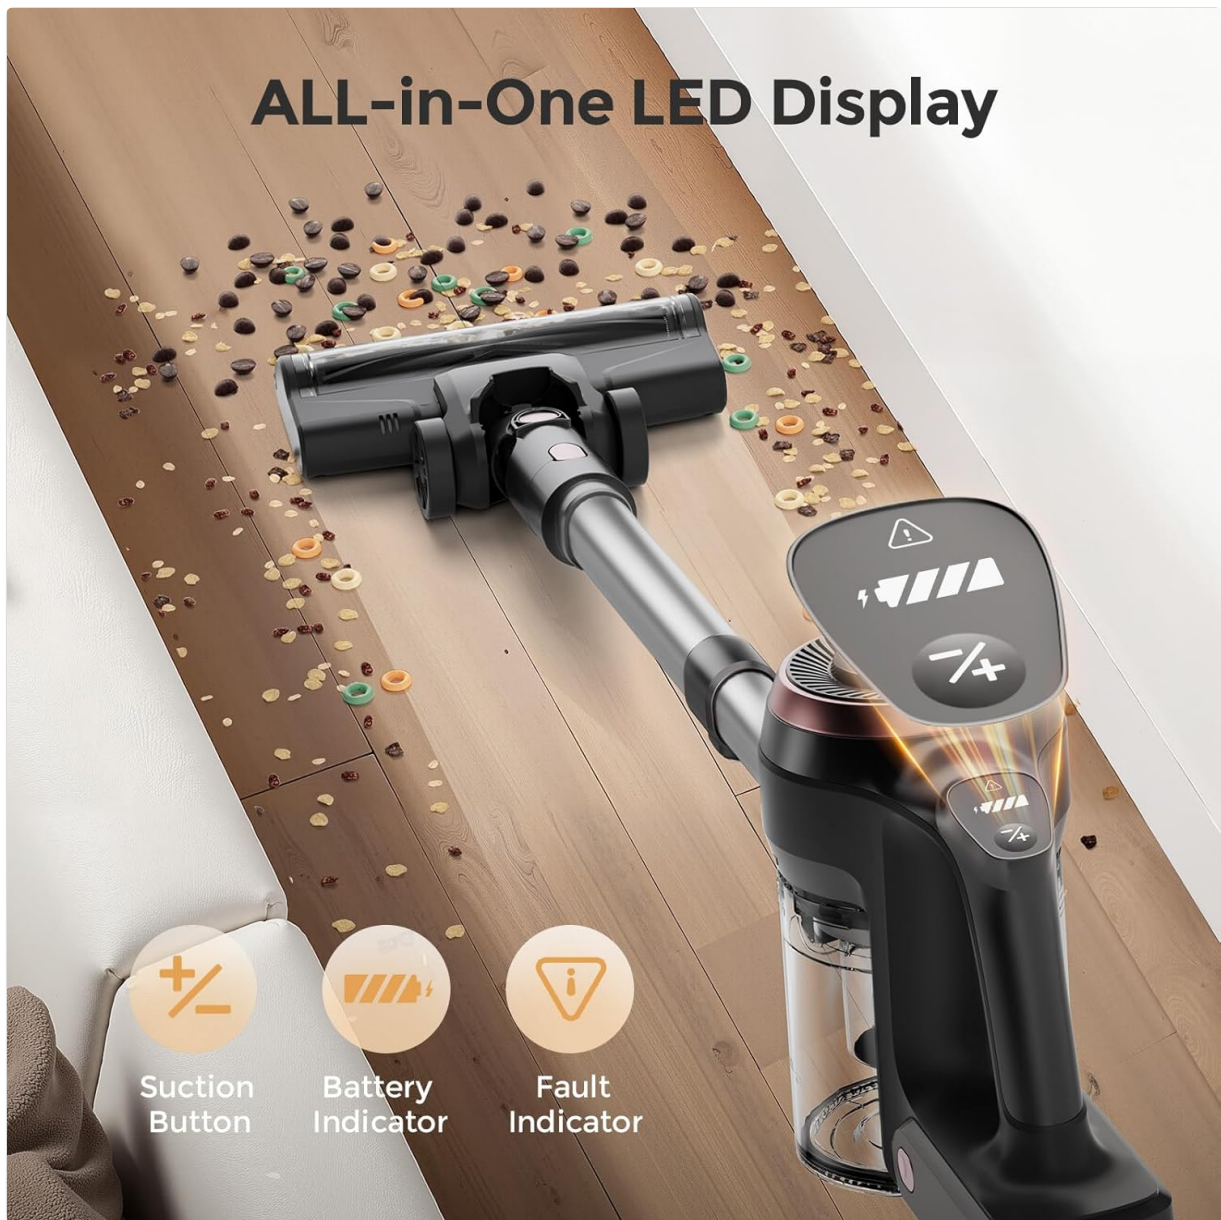


Figure 4.1: ALL-in-One LED Display

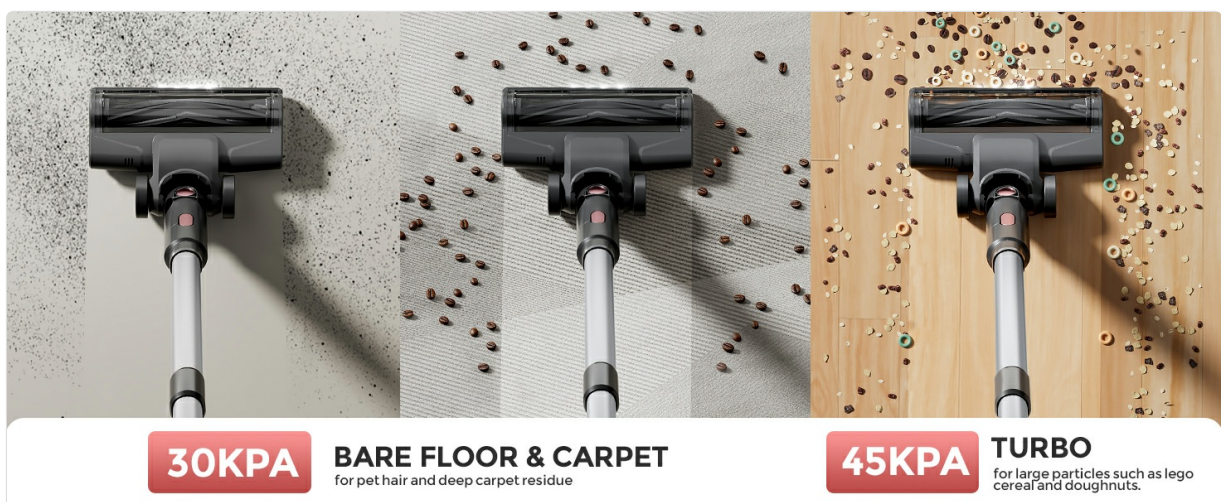


Figure 4.2: Suction Modes for Different Cleaning Needs

4.2 Using Attachments

The Vazone S22 is designed for versatility. Attachments can be used with the telescopic tube for extended reach or directly with the main motor unit for handheld cleaning.

- **Motorized Cleaner Head:** Ideal for all floor types, including hardwood, carpets, and tile. The swivel

head allows for easy maneuverability around furniture.

- **Telescopic Tube:** Adjust the length by pressing the release button and sliding the tube to your desired height. This feature also enables the vacuum to be self-standing.
- **Crevice Nozzle:** Use for tight spaces, corners, baseboards, window tracks, and car interiors.
- **2-in-1 Bristle Brush:** Perfect for upholstery, curtains, mattresses, and delicate surfaces.

Multiple Accessories, from Floor to Ceiling

crevice tool and 2-in-1 brush, ideal to reach deep under furniture, ceiling, stairs, car interiors, sofa, and tight spaces.



Figure 4.3: Multiple Accessories for Floor to Ceiling Cleaning



Figure 4.4: Telescopic Tube for Extended Reach



Long Crevice Tool

Featuring a retractable brush design, this tool efficiently removes dust from:




Figure 4.5: Long Crevice Tool in Use




2-in-1 Upholstery Brush

Featuring a retractable brush design, this tool efficiently removes dust from:



Figure 4.6: 2-in-1 Upholstery Brush in Use

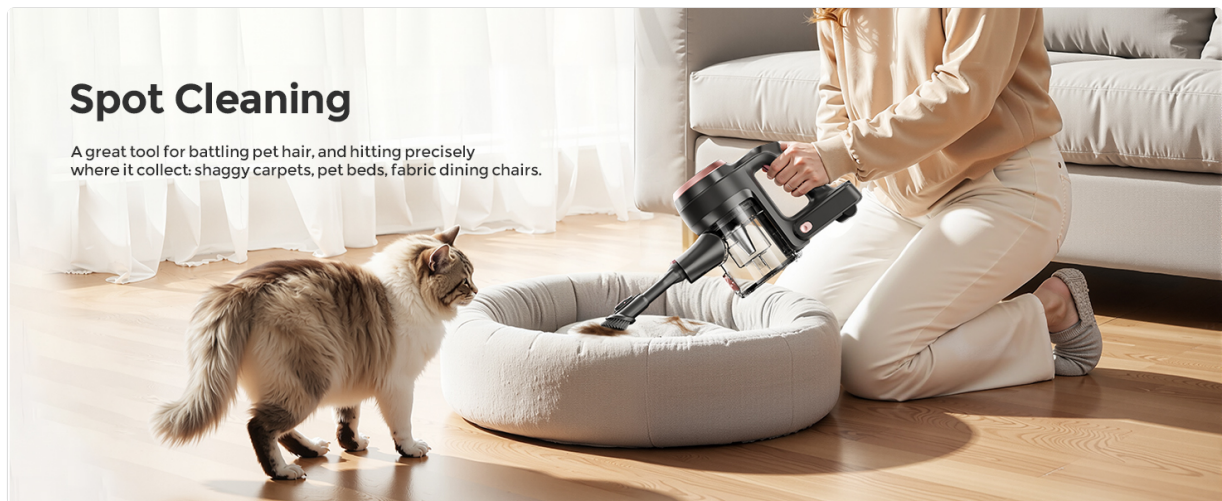

Spot Cleaning

A great tool for battling pet hair, and hitting precisely where it collects: shaggy carpets, pet beds, fabric dining chairs.

Figure 4.7: Spot Cleaning with the Vazone S22



Figure 4.8: Ultra-Lightweight Design for High-Reach Cleaning

4.3 Self-Standing Feature

The Vazone S22 features a self-standing design, allowing you to pause cleaning and leave the vacuum upright without needing to lean it against a wall or furniture. This enhances convenience during use.

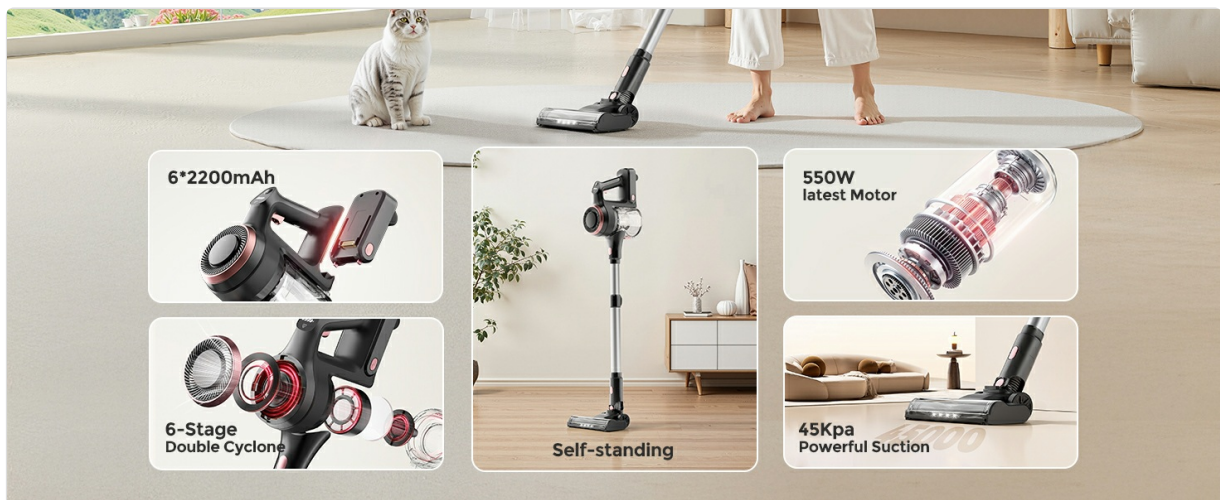


Figure 4.9: Self-Standing Feature Highlight

5. MAINTENANCE

5.1 Emptying the Dustbin

To maintain optimal suction and performance, empty the dustbin regularly, especially when it reaches the MAX fill line. The large 1.5L dustbin capacity allows for longer cleaning sessions before needing to be emptied.

1. Ensure the vacuum is turned off.
2. Hold the main motor unit over a trash can.
3. Press the one-touch release button on the dustbin to open the bottom flap and release debris.
4. Close the flap securely after emptying.

Larger, Cleaner, More Convenient



1.5L Larger Dustbin



One-press to Empty Dust



One-button to
Release Dustbin



Figure 5.1: One-Touch Dustbin Emptying



One-Touch Emptying

Clean Every Surface Without Bending

Figure 5.2: Easy Dustbin Emptying

5.2 Filter Cleaning

The Vazone S22 features a multi-cone cyclone filtration system with a HEPA filter, capturing particles as small as $0.1\mu\text{m}$. Regular cleaning of the filters is crucial for maintaining suction power and air purification efficiency.

- Remove the dustbin and separate the filter components.
- Tap off loose dirt from the pre-filter and HEPA filter.
- Rinse the filters under cold running water. Ensure they are completely dry before reassembling and using the vacuum. Allow at least 24 hours for air drying.
- Replace filters if they are damaged or if suction power significantly decreases even after cleaning.

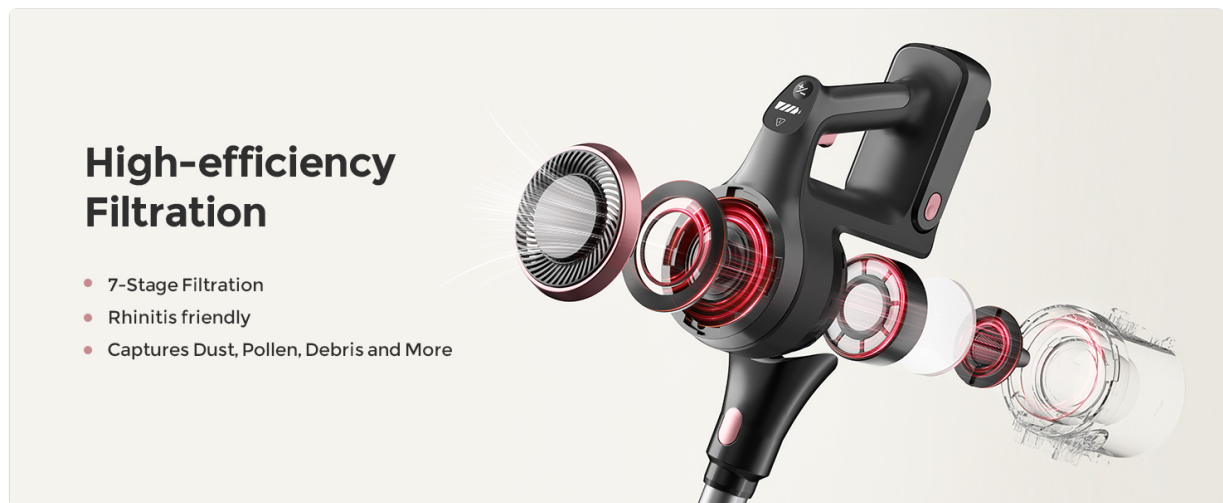


Figure 5.3: High-Efficiency Filtration System

5.3 Brush Head Cleaning

The motorized cleaner head features a tangle-free design, but occasional cleaning of the brush roll may be necessary, especially if long hair or fibers accumulate.

- Ensure the vacuum is turned off and disconnected from the power source.
- Detach the motorized cleaner head from the telescopic tube.
- Use the provided mini cleaning brush or a pair of scissors to carefully remove any tangled hair or debris from the brush roll.
- Reattach the cleaner head once cleaned.

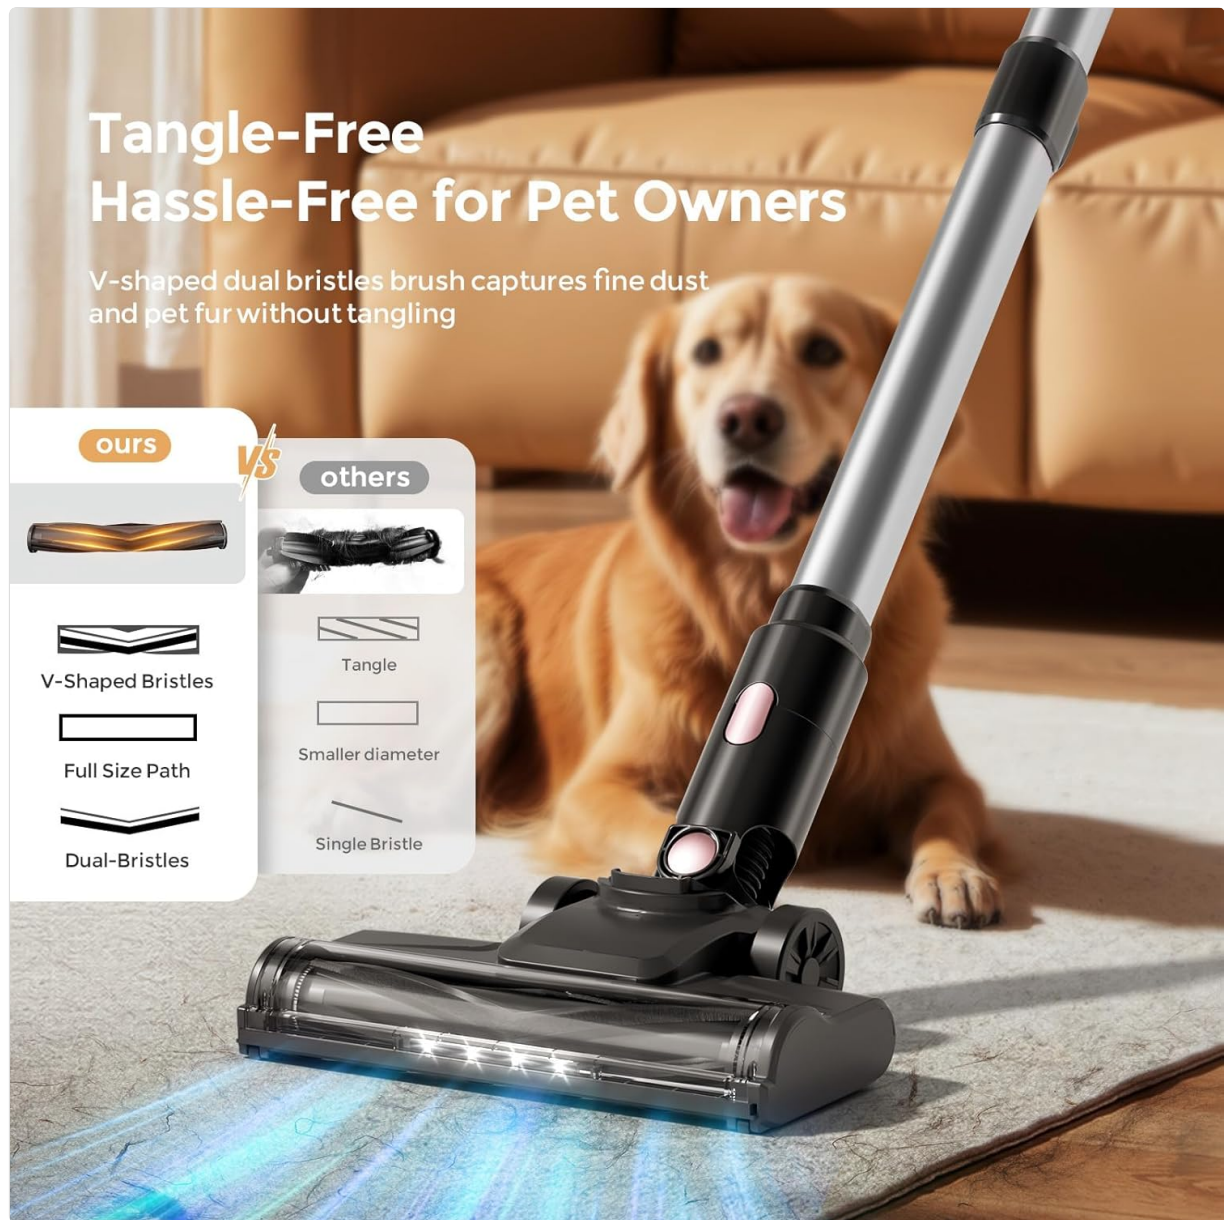


Figure 5.4: Tangle-Free Brush Head Design

6. TROUBLESHOOTING

If you encounter issues with your Vazone S22 Cordless Vacuum Cleaner, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Vacuum does not turn on.	Battery is not charged or not properly inserted.	Ensure battery is fully charged and securely inserted.
Low suction power.	Dustbin is full, filters are clogged, or brush roll is obstructed.	Empty dustbin, clean filters, and remove any obstructions from the brush roll.
Brush roll not spinning.	Obstruction in the brush roll or cleaner head.	Turn off the vacuum and remove any tangled hair or debris from the brush roll.
Short runtime.	Battery not fully charged or operating in Max suction mode.	Ensure battery is fully charged. Max mode consumes more power; use Standard mode for longer runtime.
Vacuum makes unusual noise.	Obstruction in the air path or damaged component.	Check for blockages in the hose, nozzles, or dustbin. If the noise persists, contact customer support.

If the problem persists after attempting these solutions, please contact Vazone customer support for further assistance.

7. SPECIFICATIONS

Feature	Detail
Brand	Vazone
Model Name	S22
Special Feature	Bagless, Self-Standing
Filter Type	HEPA Filter (Multi-cone Cyclone Filtration)
Suction Power	Up to 45KPa (Max Mode)
Motor Power	550W Brushless Motor
Battery	1 x 12V (6 x 2000mAh cells), Rechargeable, Removable
Runtime	Up to 35-55 minutes (depending on mode)
Charging Time	Approx. 4-5 hours
Dustbin Capacity	1.5 Liters (11000 Milliliters)
Product Dimensions	17.32"L x 9.84"W x 7.48"H
Item Weight	7.37 pounds (approx. 3.34 kg)
Surface Recommendation	Hard Floor, Carpet, Tile & Marble
Included Components	Accessory Kit (Motorized Cleaner Head, Telescopic Tube, Crevice Nozzle, 2-in-1 Bristle Brush, Mini Cleaning Brush, Filter Sponge, Wall Mount)

8. WARRANTY & SUPPORT

For specific warranty information regarding your Vazone S22 Cordless Vacuum Cleaner, please refer to the warranty card included in your product packaging or visit the official Vazone website. Keep your purchase receipt as proof of purchase for warranty claims.

Customer Support

If you have any questions, require technical assistance, or need to report an issue, please contact Vazone customer support through the following channels:

- **Online:** Visit the official Vazone website for FAQs and contact forms.
- **Email:** Refer to your product packaging or warranty card for the customer service email address.
- **Phone:** Check the Vazone website or product documentation for customer service phone numbers.

When contacting support, please have your model number (S22) and purchase date available.

9. PRODUCT VIDEOS

Watch the following video for a demonstration of the Vazone S22 Cordless Vacuum Cleaner's features and capabilities.

Your browser does not support the video tag.

Video 9.1: Vazone S22 Vacuum Cleaner Demonstration by Vacuum King. This video showcases the vacuum's powerful suction, versatility with different attachments, and ease of use for various cleaning tasks around the home and in a car.