

[Manuals.plus](#) /

› [MYPIN](#) /

› MYPIN Smart Keypad Door Lock MJ-HS0467 User Manual

MYPIN MJ-HS0467

MYPIN Smart Keypad Door Lock MJ-HS0467 User Manual

Model: MJ-HS0467

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your MYPIN Smart Keypad Door Lock, Model MJ-HS0467. Please read this manual thoroughly before installation and use to ensure proper function and security.

PACKING LIST

Before beginning installation, verify that all components are present in the package.


Packing list Included



Exterior Assembly



Interior Assembly

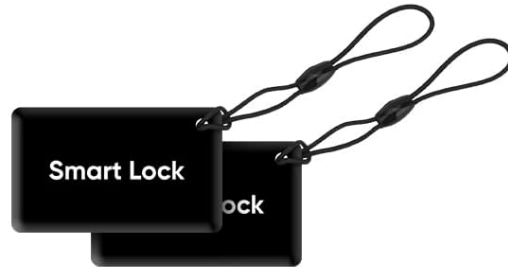

Fobs cards *2




Backup Keys*2



User manual



Latch Bolt




Door magnet



Screws



Strike

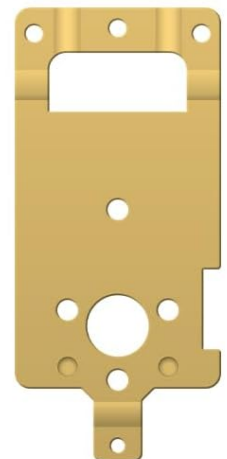

Mounting Plate

Image: Contents of the MYPIN Smart Keypad Door Lock package.

- Exterior Assembly
- Interior Assembly
- Latch Bolt
- Backup Keys (x2)
- Fob Cards (x2)
- User Manual
- Strike
- Screws
- Door Magnet

INSTALLATION GUIDE

This section details the steps required to install your MYPIN Smart Keypad Door Lock. Ensure your door thickness is between 38mm to 50mm (1.5 to 1.97 inches) and the door hole is 2-1/8" (55mm).

1. Prepare the Door

Use the provided drilling template to mark and drill holes on your door. Ensure the backset is correctly set to either 2.36" (60mm) or 2.76" (70mm) as required.

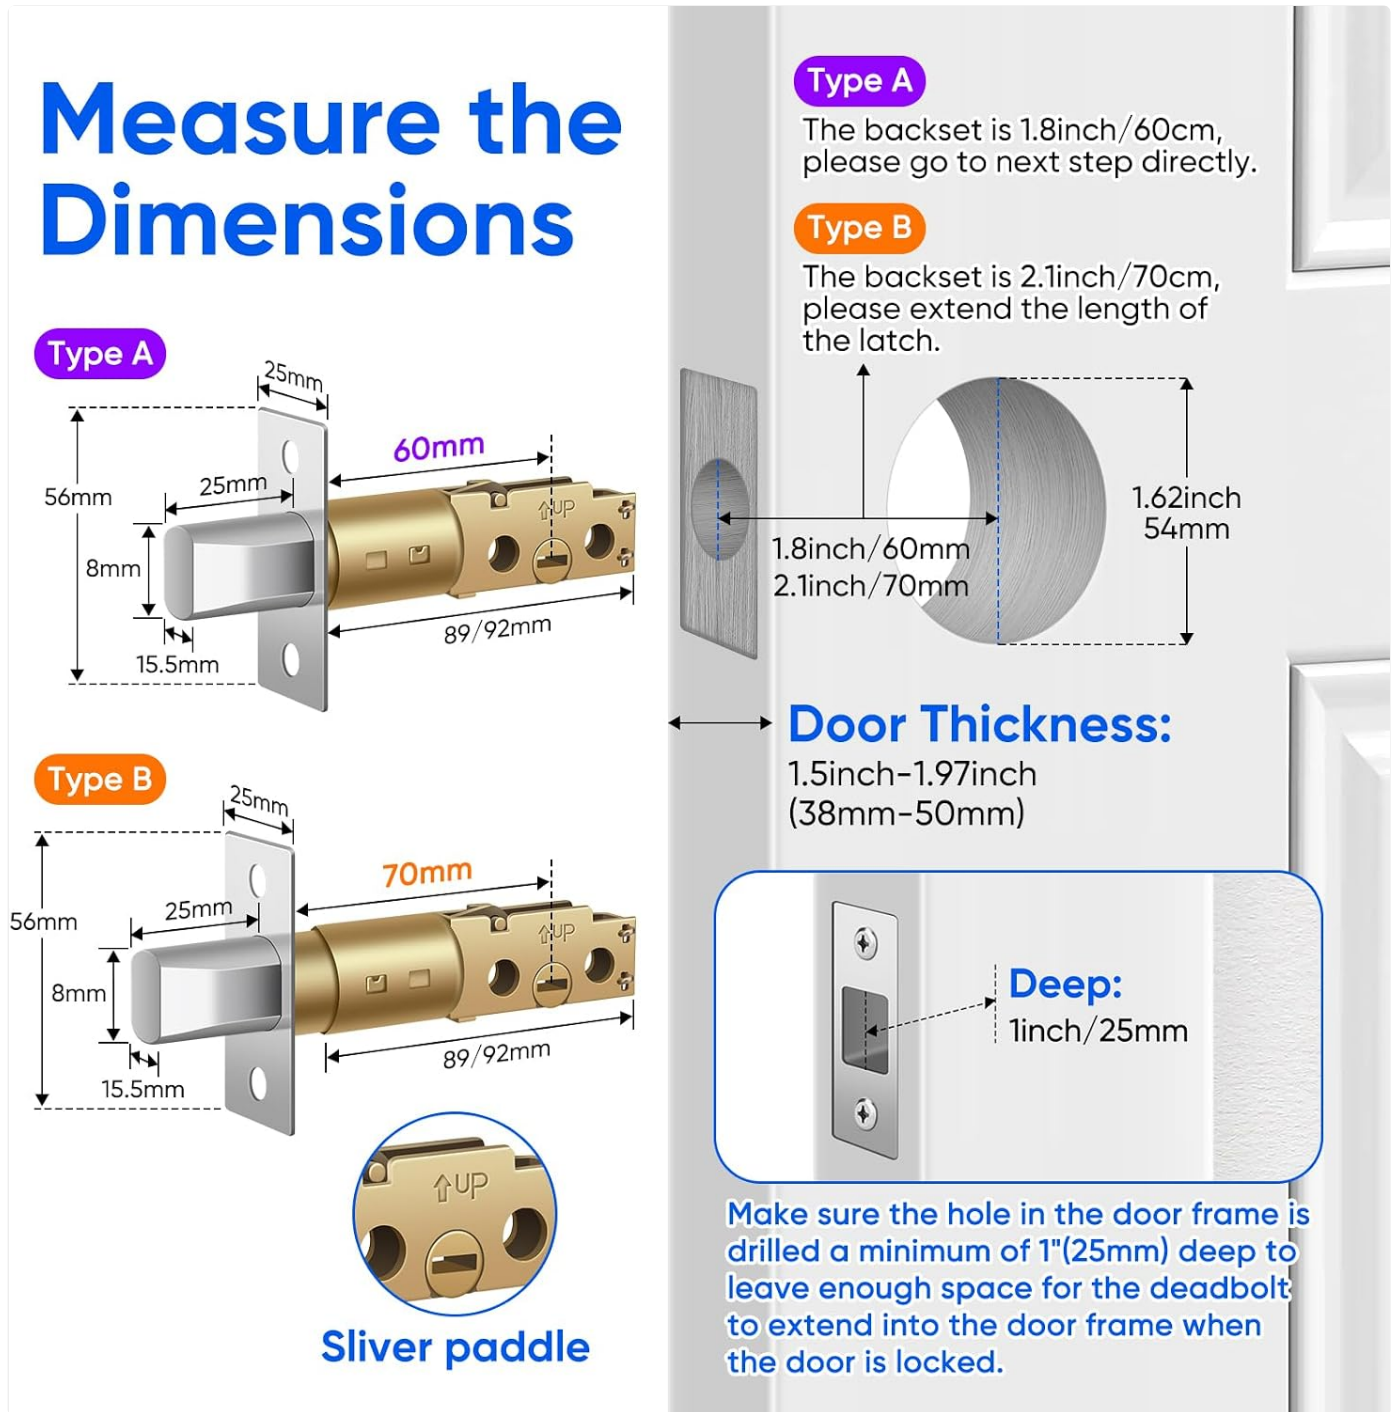


Image: Door measurement guide for backset and thickness.

The lock automatically detects door swing direction (left/right) during initial installation, eliminating manual configuration.

2. Install the Latch

Insert the latch bolt into the door edge. If your backset is 2.36" (60mm), proceed directly. If it's 2.76" (70mm), extend the length of the latch as shown in the video. Secure the latch with screws.

Your browser does not support the video tag.

Video: Step-by-step installation guide for the MYPIN Smart Keypad Door Lock, including preparing the door, installing the latch, and mounting the lock bodies.

3. Install the Outdoor Lock Body

Ensure the torque blade is horizontal and align it with the hole on the latch. Pass the power cord through the door.

4. Install the Indoor Lock Body

Connect the power cord and door magnet cable to the corresponding sockets on the indoor assembly. Push them firmly until fully attached. Secure the indoor assembly to the door using the provided screws. Insert 4 AAA alkaline batteries (not included) and replace the battery cover.

Attach the door magnet to the door frame, ensuring it is on the same level as the lock's sensor for proper auto-lock functionality.

OPERATING INSTRUCTIONS


The MYPIN Smart Keypad Door Lock offers multiple ways to access your property.

Unlock Methods

Multiple Keyless Access



Fingerprint

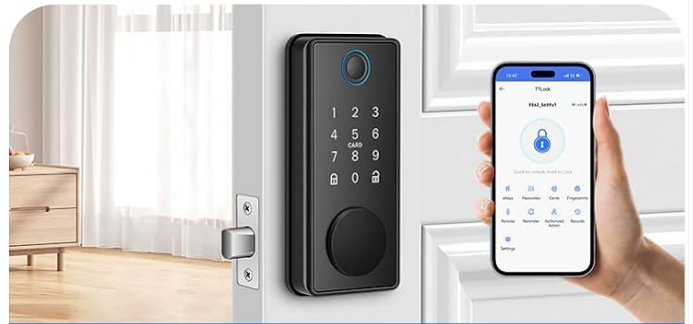

App Unlock



Apple Watch



Keypad



Key Fob



Mechanical Keys

Image: Overview of the six keyless access methods.

- **Fingerprint:** The fingerprint recognition takes approximately 0.3 seconds and unlocks in 1 second. Supports up to 100 fingerprints.
- **Password (Keypad):** Enter your user code on the touchscreen keypad. Supports up to 100 multiple user codes.
- **App Control:** Use the TT LOCK Smart App via Bluetooth within 2 meters. For remote control, a G2 Gateway (sold separately) is required.
- **Apple Watch:** Supported for unlocking. Initial setup requires connecting to the TT LOCK app on your phone. Cellular Apple Watch versions can unlock without the phone; GPS versions require the phone to be nearby for network connection.
- **Fob Cards:** Tap the provided fob cards to unlock.
- **Physical Key:** Two backup keys are included for traditional manual unlocking.

Smart App Features (TT LOCK App)

Smart App To Manage

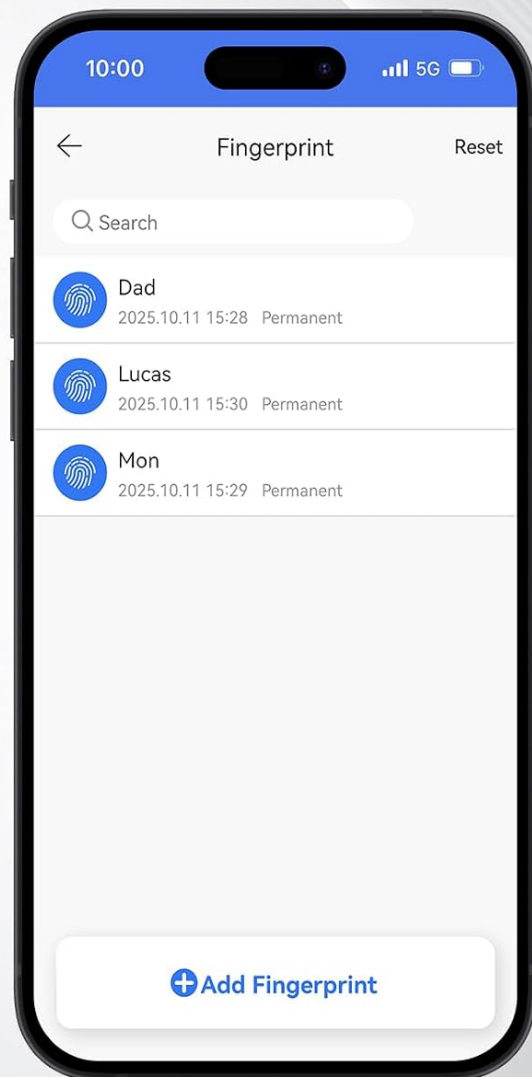
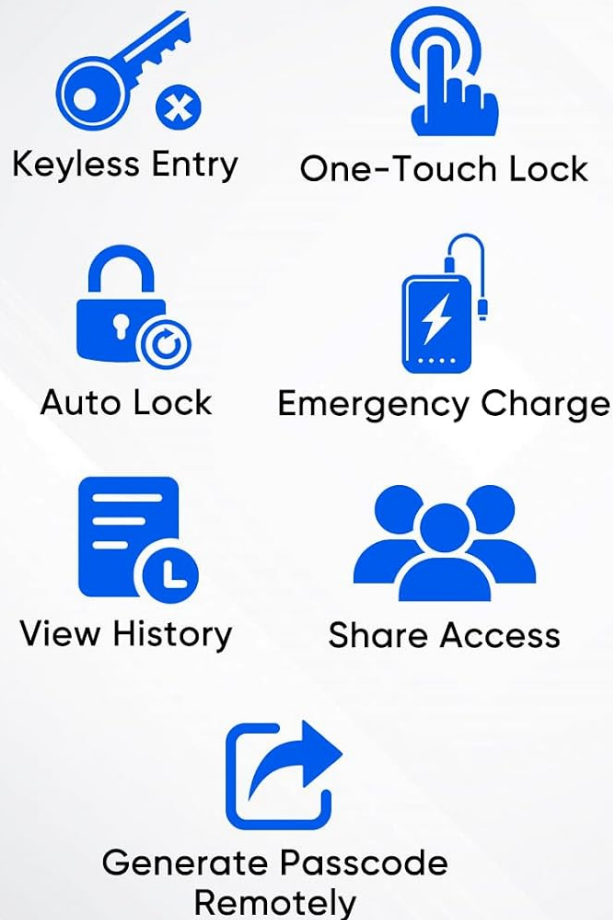


Image: Features available through the TT LOCK Smart App.

- **User Management:** Add, modify, or delete fingerprints and user codes.
- **Generate Passcodes:** Create one-time passwords that are automatically deleted after use.
- **Share eKeys:** Grant temporary or permanent access to others via the app.
- **Access Logs:** Review entry and exit history.
- **Auto-Lock:** Configure the lock to automatically secure after a set period.
- **One-Key Lock:** Simply tap to lock the door.
- **Anti-Peeping Password:** Enter random digits before or after your correct password to prevent others from guessing it.
- **Battery Monitoring:** Check the current battery level of the lock.

Voice Assistant Integration

When paired with a G2 Gateway (sold separately), the lock can be controlled using voice commands through Alexa or Google Voice Assistant.

MAINTENANCE

- **Battery Replacement:** The lock is powered by 4 AAA batteries. Replace them when the low battery indicator appears in the app or on the lock.
- **Emergency Power:** A Type-C charging port is located under the front panel for emergency power if batteries are depleted.
- **Cleaning:** Wipe the lock surface with a soft, dry cloth. Avoid abrasive cleaners or solvents that could damage the finish or electronic components.
- **Operating Temperature:** The lock is designed to operate in temperatures ranging from -4°F to 158°F (-20°C to 70°C).

TROUBLESHOOTING

- **Lock not responding:** Check battery levels. Use the Type-C emergency charging port if necessary.
- **Fingerprint not recognized:** Ensure your finger is clean and dry. Re-register your fingerprint if issues persist.
- **Keypad not working:** Verify that the lock has power. Try using a physical key or the app.
- **App connection issues:** Ensure Bluetooth is enabled on your phone and you are within range (2 meters). If using remote access, check the G2 Gateway connection.
- **Auto-lock not engaging:** Verify the door magnet is correctly installed and aligned with the lock's sensor.

SPECIFICATIONS

Feature	Detail
Brand	MYPIN
Model Number	MJ-HS0467
Lock Type	Biometric, Combination Lock, Deadbolt, Keypad
Unlock Methods	Fingerprint, Password, Physical Key, App Control, Fob Cards, Apple Watch
Material	Aluminum
Color	Black
Item Dimensions (L x W x H)	13.9 x 1.5 x 6.8 Centimetres
Door Thickness Compatibility	38 mm to 50 mm (1.5 to 1.97 inches)
Door Hole Compatibility	2-1/8" (55mm)
Power Source	4 AAA Batteries (Not Provided)
Emergency Power	Type-C Charging Port
Connectivity	Bluetooth (App Control), G2 Gateway (Remote Control, sold separately)

Special Features	Anti-Peeping Password, Auto-Lock, Automatic Left/Right Detection, One-Click Lock/Unlock, Alexa/Google Voice Assistant compatibility (with G2 Gateway)
------------------	---

WARRANTY AND SUPPORT

For warranty information, please refer to the product packaging or contact MYPIN customer support directly.

Manufacturer Contact: support@mypin.com

Return Policy: 30-day refund/replacement policy through the retailer.

