Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Gawfolk GFTY981

Gawfolk 32-inch 4K UHD 240Hz Curved Gaming Monitor User Manual

Model: GFTY981

1. Introduction

Thank you for choosing the Gawfolk 32-inch 4K UHD 240Hz Curved Gaming Monitor. This manual provides essential information for setting up, operating, and maintaining your monitor. Please read it thoroughly before use to ensure optimal performance and safety.

2. Safety Information

- Do not expose the monitor to rain or moisture to prevent fire or electric shock.
- Do not open the monitor casing. There are no user-serviceable parts inside. Refer all servicing to qualified personnel.
- Place the monitor on a stable, flat surface to prevent it from falling.
- Ensure proper ventilation around the monitor. Do not block ventilation openings.
- Use only the power adapter supplied with the monitor.
- Disconnect the power cable from the outlet if the monitor will not be used for an extended period.

3. Package Contents

Please check the package contents upon unboxing:

- Gawfolk 32-inch 4K UHD 240Hz Curved Gaming Monitor
- Power Adapter
- HDMI Cable
- DisplayPort Cable
- User Manual
- Monitor Stand Components (Base and Neck)
- Screws for Stand Assembly

4. Setup

4.1 Assembling the Stand

1. Carefully remove the monitor from its packaging, keeping it protected.
2. Attach the stand neck to the monitor's rear panel using the provided screws.
3. Connect the stand base to the stand neck and secure it with the remaining screws.
4. Place the assembled monitor on a stable desk.

4.2 VESA Wall Mounting (Optional)

This monitor supports VESA mount standard 75x75mm. If you choose to wall mount, ensure you use a compatible VESA bracket (not included) and follow the bracket's installation instructions.



Image: Rear view of the monitor illustrating the VESA 75x75mm mounting points and various input ports.

4.3 Connecting to a Device

Connect your PC, gaming console (PS5, Xbox Series X), or other devices using the appropriate cables.

- **HDMI:** Use an HDMI 2.1 cable to connect to one of the two HDMI 2.1 ports for 4K UHD resolution at high refresh rates.
- **DisplayPort:** Use a DisplayPort 2.0 cable to connect to one of the two DP 2.0 ports for optimal performance, including G-Sync compatibility.
- **Audio Out:** Connect headphones or external speakers to the 3.5mm audio output jack.

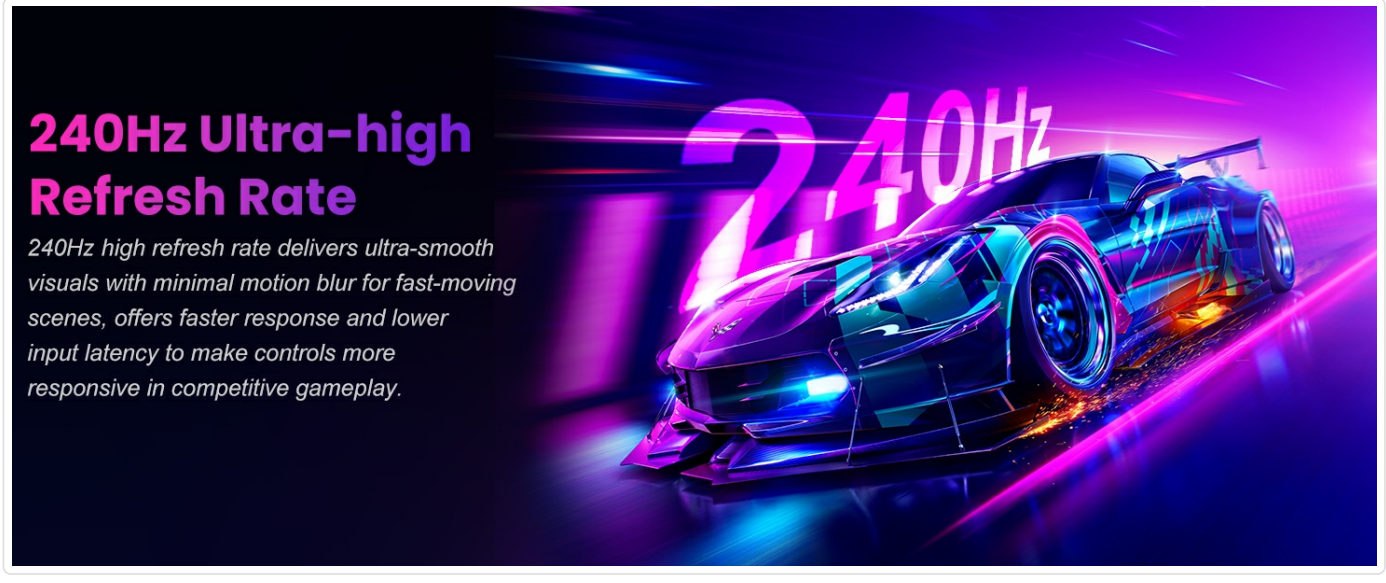


Image: Detailed view of the monitor's connectivity options, including two HDMI 2.1 ports, two DisplayPort 2.0 ports, an audio output, and a DC power input.

4.4 Power Connection

Connect the power adapter to the monitor's DC input port, then plug the power cable into a wall outlet.

5. Operating Instructions

5.1 Power On/Off

Press the power button located on the monitor to turn it on or off. The power indicator light will illuminate when the monitor is active.

5.2 On-Screen Display (OSD) Menu

Use the control buttons (usually located on the back or bottom of the monitor) to navigate the OSD menu. The OSD allows you to adjust various settings:

- **Picture Settings:** Brightness, Contrast, Sharpness, Color Temperature.
- **Color Settings:** Adjust color depth, gamma, and color space. This monitor offers 8-bit + FRC color depth with 1.07 billion colors and 85% NTSC (118% sRGB) color space for vivid and accurate visuals.
- **Input Source:** Select between HDMI 1, HDMI 2, DP 1, or DP 2.
- **Audio Settings:** Adjust volume for the integrated 8Ω 2W speakers or connected headphones.
- **Gaming Features:** Enable/disable FreeSync/G-Sync, OD (Overdrive), Dark Area Compensation, Field Sync, and the on-screen crosshair.

5.3 Key Features

- **4K UHD Resolution & 240Hz Refresh Rate:** Experience stunning visuals with 3840x2160 pixels and ultra-smooth motion at 240Hz, ideal for fast-paced gaming. The 1ms response time minimizes motion blur.

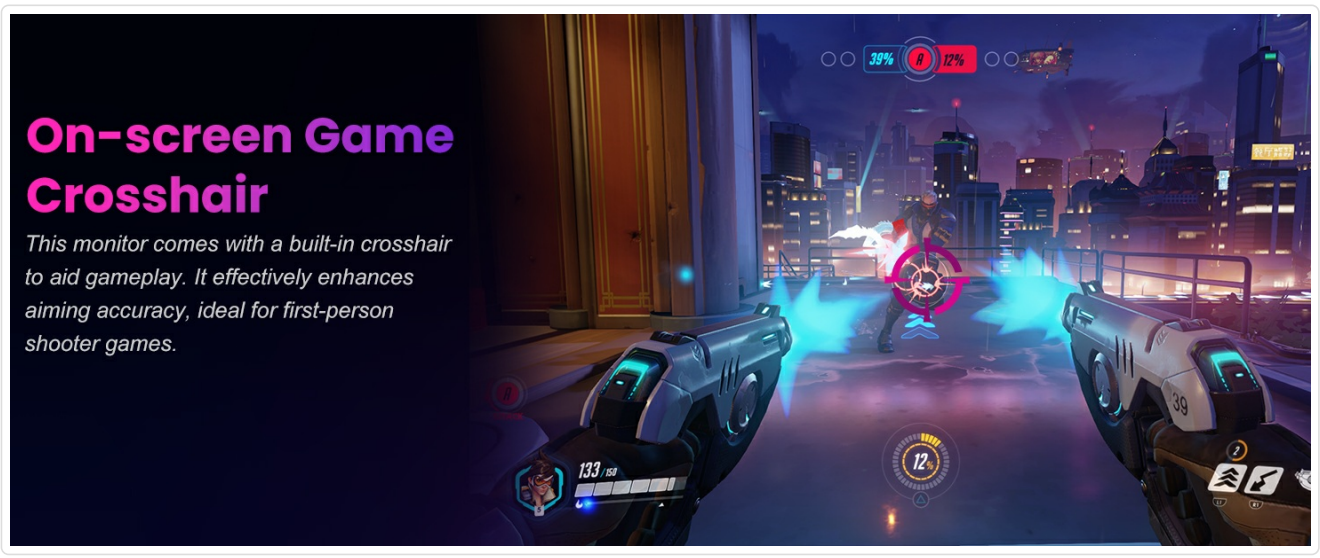


Image: Visual comparison highlighting the superior detail of 4K UHD (3840x2160) resolution over standard HD.

Image: Dynamic graphic emphasizing the 240Hz ultra-high refresh rate for fluid, responsive gameplay.

- **1500R Curved Screen:** The 1500R curvature matches the natural field of human vision, reducing eye strain and providing a more immersive viewing experience.

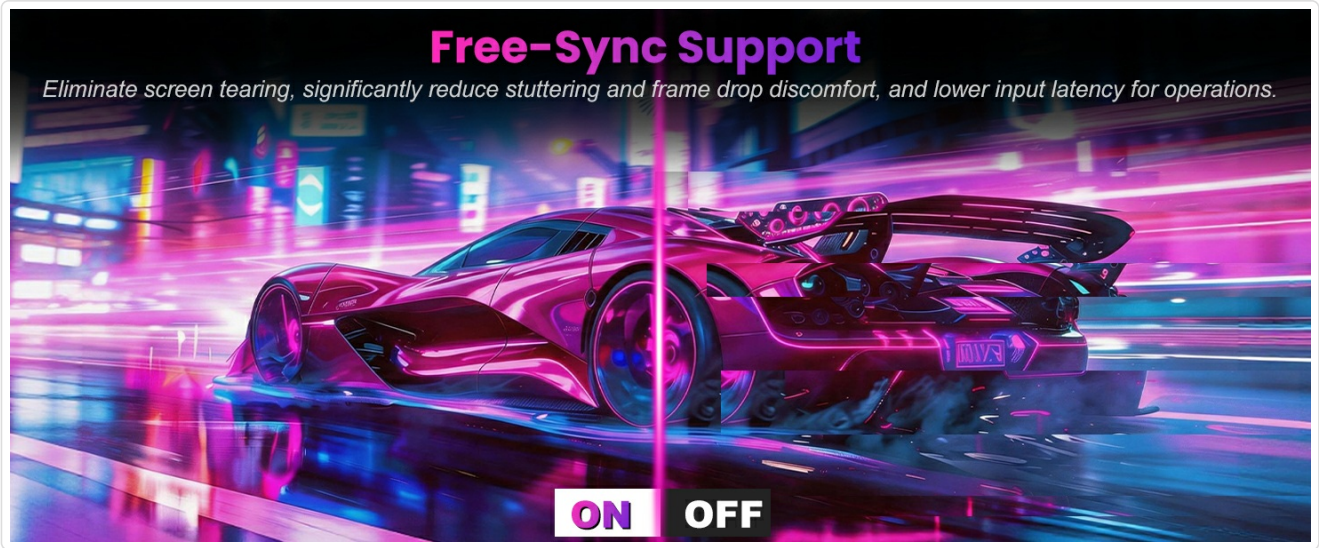


Image: Illustration of the 1500R curved screen, designed to enhance immersion and reduce visual distractions.

- **Adaptive Sync (G-Sync & FreeSync Compatible):** Eliminates screen tearing and stuttering for a smooth, fluid gaming experience. G-Sync is compatible via DisplayPort only.

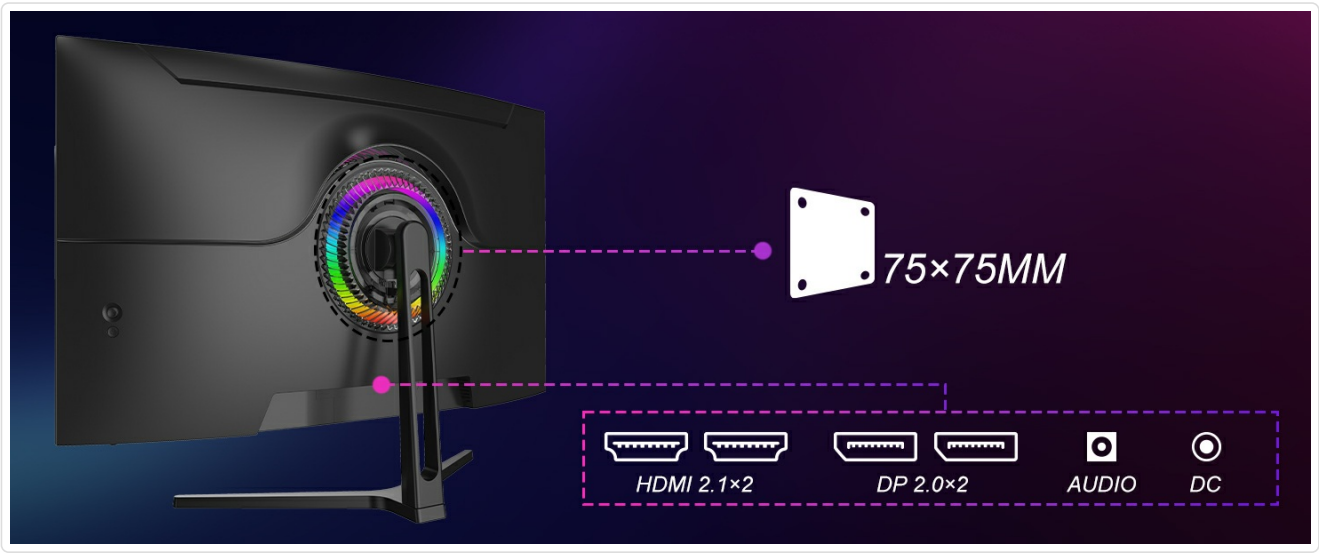


Image: Graphic demonstrating the Free-Sync support feature, which eliminates screen tearing and reduces input latency.

- **HDR (High Dynamic Range):** Enhances contrast and brightness, delivering deeper blacks and brighter whites for a more dynamic image.
- **Eye Protection Features:** DC Dimmer technology reduces screen flickering, protecting your eyes during extended use.
- **On-screen Game Crosshair:** A built-in crosshair feature to assist with aiming accuracy in first-person shooter games.

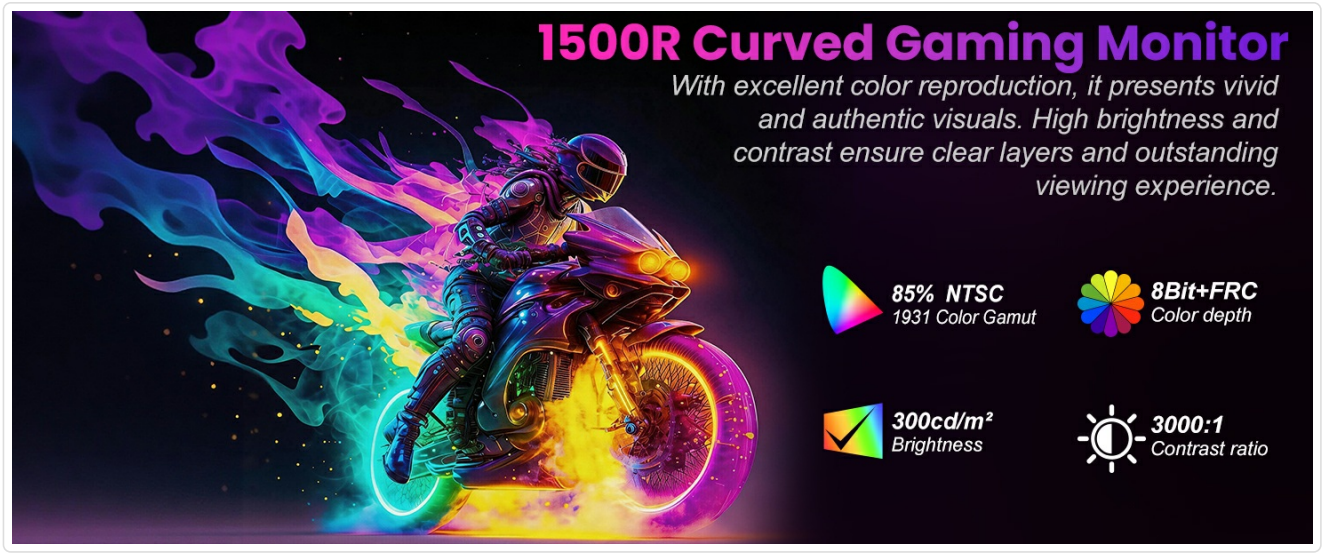


Image: In-game screenshot showing the integrated on-screen crosshair, designed to improve targeting in competitive games.

- **Adjustable Tilt:** The monitor stand allows for adjustable tilt from 5° to 15° (±4°) for ergonomic viewing.

6. Maintenance

- **Cleaning the Screen:** Gently wipe the screen with a soft, lint-free cloth. For stubborn marks, dampen the cloth slightly with water or a specialized screen cleaner. Never spray liquid directly onto the screen.
- **Cleaning the Casing:** Use a soft, dry cloth to clean the monitor casing. Avoid abrasive cleaners.
- **Storage:** If storing the monitor for an extended period, disconnect it from power and store it in a cool, dry place, preferably in its original packaging.

7. Troubleshooting

Problem	Possible Cause	Solution
No image on screen	Monitor not powered on; Incorrect input source; Loose video cable.	Ensure power is connected and monitor is on. Select correct input source via OSD. Check video cable connections.
Image is blurry or distorted	Incorrect resolution; Video cable issue.	Set display resolution to 3840x2160. Try a different video cable.
No sound	Volume too low; Incorrect audio output selected; Loose audio cable.	Adjust volume in OSD and device settings. Ensure headphones/speakers are properly connected.
Screen flickering or tearing	Adaptive Sync not enabled; Graphics card driver issues.	Enable FreeSync/G-Sync in OSD and graphics card settings. Update graphics drivers.

8. Specifications

Feature	Specification

Feature	Specification
Brand	Gawfolk
Model Number	GFTY981
Screen Size	32 Inches
Resolution	4K UHD 3840 x 2160
Aspect Ratio	16:9
Refresh Rate	240 Hz
Response Time	1 Millisecond (MPRT)
Curvature	1500R
Color Depth	8-bit + FRC (1.07 Billion Colors)
Color Gamut	85% NTSC 1931 (118% sRGB)
Brightness	300 cd/m²
Contrast Ratio	3000:1
Connectivity	2x HDMI 2.1, 2x DisplayPort 2.0, 1x Audio Out
Adaptive Sync	G-Sync Compatible (via DP), FreeSync Compatible
Integrated Speakers	2x 8Ω 2W
VESA Mount	75x75mm
Tilt Adjustment	5° to 15° (±4°)
Dimensions (DxWxH)	10P x 71l x 51.4H cm
Weight	3.3 Kilograms
Color	Black

9. Warranty and Support

9.1 Product Warranty

The Gawfolk monitor is covered by a 12-month warranty for non-human-caused damage. The power supply is also covered under this warranty. Please retain your proof of purchase for warranty claims.

9.2 Customer Support

For technical assistance, troubleshooting, or warranty inquiries, please contact Gawfolk customer support through the retailer's platform or the official Gawfolk website. Provide your model number (GFTY981) and purchase details for faster service.

© 2026 Gawfolk. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0GY11Q619

More documents and user manuals: **https://manuals.plus/**