

[Manuals.plus](#) /

› [SABLUTE](#) /

› SABLUTE KM62 Wireless Keyboard and Mouse Combo User Manual

SABLUTE KM62

SABLUTE KM62 Wireless Keyboard and Mouse Combo User Manual

Model: KM62 | Brand: SABLUTE

1. INTRODUCTION

This manual provides detailed instructions for setting up, operating, and maintaining your SABLUTE KM62 Wireless Keyboard and Mouse Combo. This combo offers versatile connectivity options (2.4G USB and Dual Bluetooth), 11 backlit effects, a compact design with a numeric keypad, and a rechargeable battery system. Please read this manual thoroughly before use to ensure optimal performance and longevity of your device.

11 Backlit Effects

7 Solid Colors + 4 Dynamic RGB Modes

5 Brightness Levels



5 RGB Speed Levels



Backlit On/Off



7 Solid Colors



4 Dynamic RGB



Image: The SABLUTE KM62 Wireless Keyboard and Mouse Combo displayed on a wooden desk, showcasing its sleek design and backlit keys.

2. PACKAGE CONTENTS

Verify that all items are present in your package:

- SABLUTE KM62 Wireless Keyboard
- SABLUTE Wireless Mouse
- USB Receiver (stored in the mouse battery compartment)
- USB-C Charging Cable
- User Manual (this document)

3. SETUP AND CONNECTION

3.1. 2.4G Wireless Connection

1. Locate the USB receiver inside the mouse battery compartment.
2. Insert the USB receiver into an available USB port on your computer.
3. Turn on the keyboard and mouse using their respective power switches.
4. The devices should connect automatically. If not, refer to the re-pairing guide below.

3.2. Bluetooth Connection (BT1/BT2)

1. Turn on the keyboard and mouse.
2. On the keyboard, press and hold **Fn + 1** or **Fn + 2** for 3-5 seconds until the indicator light flashes, indicating pairing mode.
3. On your device (PC, laptop, tablet), go to Bluetooth settings and search for "SABLUTE KM62 Keyboard" or similar. Select it to pair.
4. Repeat for the mouse: press the channel switching button on the mouse until the indicator light flashes, then pair via Bluetooth settings.

3.3. Switching Between Devices

To switch between connected devices (2.4G, BT1, BT2), simply press the corresponding channel button on the keyboard (**Fn + 1**, **Fn + 2**, or **Fn + 3** for 2.4G) and the channel switching button on the mouse.

3 Devices, One Combo

3-in-1 Wireless connection, streamline your desktop



Image: The keyboard and mouse connected to a laptop, monitor, and tablet, demonstrating multi-device connectivity.

3.4. Quick Connection Guide Video

Video: A quick guide demonstrating how to connect the KM62 keyboard and mouse set.

4. OPERATING INSTRUCTIONS

4.1. Keyboard Backlight Control

The keyboard features 11 backlit effects, including 4 RGB lighting modes and 7 solid-color backlights. Adjustments are made using the Function (Fn) key combinations:

- **Fn + Backspace:** Turn backlight on/off.
- **Fn + Enter:** Change backlight mode (e.g., static, breathing, rainbow).
- **Fn + |:** Change solid-color light.
- **Fn + Up Arrow:** Increase brightness.
- **Fn + Down Arrow:** Decrease brightness.
- **Fn + Left Arrow:** Decrease RGB speed.
- **Fn + Right Arrow:** Increase RGB speed.

Note: The mouse does not have backlighting.



Image: The keyboard displaying different static and dynamic RGB backlight effects.

4.2. Mouse DPI Adjustment

The wireless mouse features three adjustable DPI settings (Dots Per Inch) to suit various tasks and preferences:

- **1200 DPI:** Suitable for detailed work requiring precise cursor movement.
- **1600 DPI:** Ideal for daily tasks and general web browsing.
- **2000 DPI:** Recommended for fast navigation and casual gaming.

To switch DPI settings, press the button located on the top of the mouse, behind the scroll wheel. The cursor speed will change with each press.

3-Level Adjustable DPI

Choose the DPI That Fits Your Workflow



Image: The wireless mouse with visual indicators for 1200, 1600, and 2000 DPI settings.

4.3. Keyboard Tilt Adjustment

The keyboard offers three levels of adjustable tilt for ergonomic comfort:



- **Flat:** No tilt.

- **Level 1:** 4-degree tilt.
- **Level 2:** 7-degree tilt.

Adjust the tilt by extending the two-stage anti-slip support feet located on the underside of the keyboard.

3 Levels Adjustable Tilt

Find your typing angle for better comfort

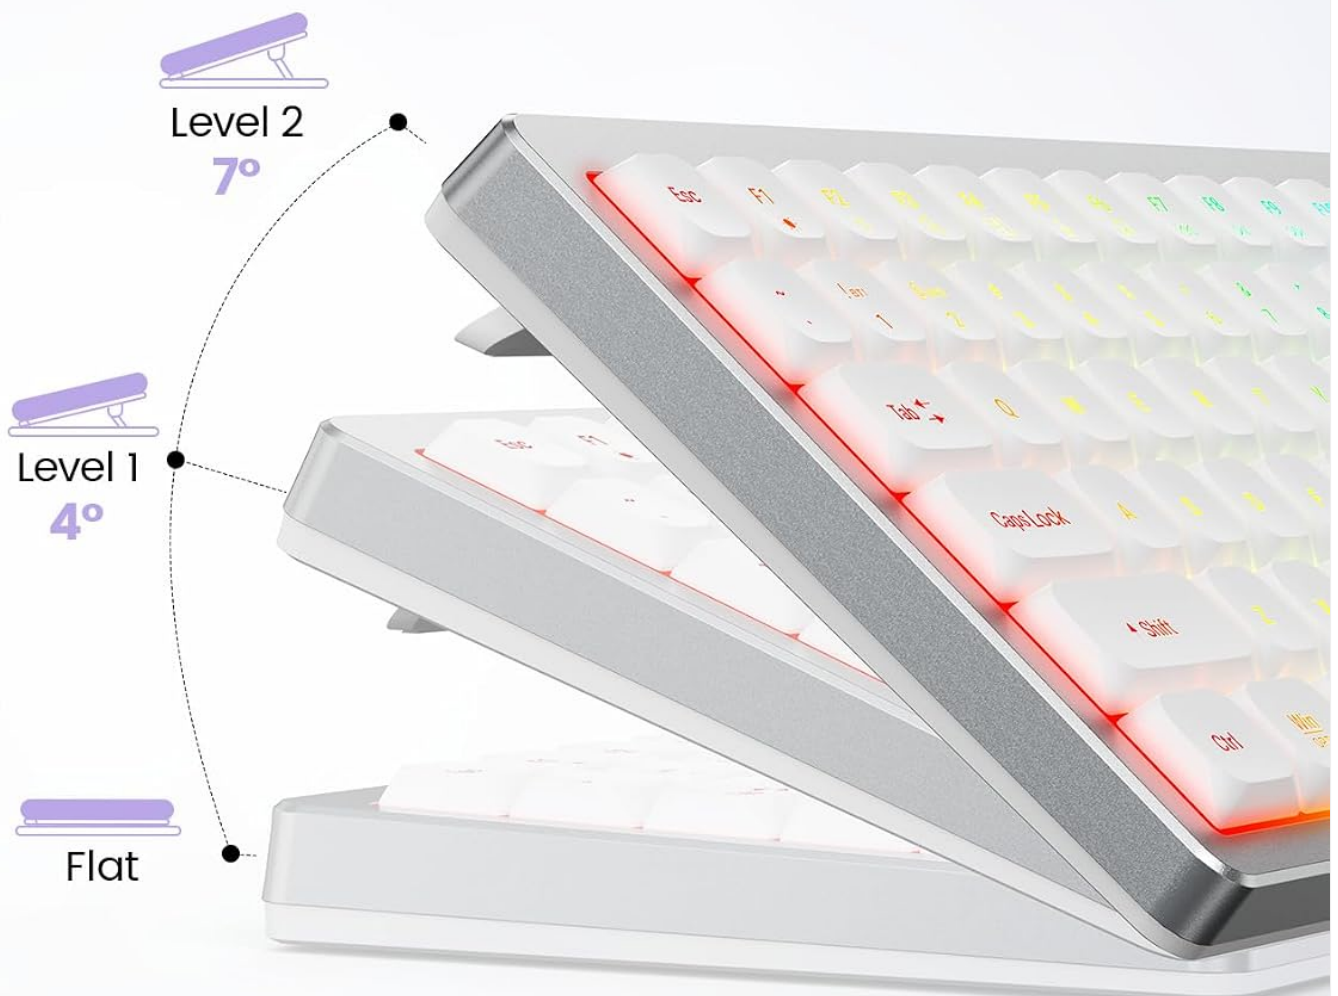

Two-Stage Anti-Slip
Support Feet

Image: A side view of the keyboard illustrating the flat, 4-degree, and 7-degree tilt options.

4.4. Compact Layout with Numeric Keypad

The keyboard features a compact layout that saves desk space while retaining a full numeric keypad for data entry and office tasks.

Compact Layout with Numeric Keypad

Save desk space without giving up daily productivity.



The image shows a compact keyboard with a numeric keypad and a mouse on a desk. The keyboard has a white base with colorful keycaps. The numeric keypad is on the right side, integrated into the main keyboard layout. The mouse is a silver, ergonomic mouse with a scroll wheel.

Our Compact Layout



5.3 in

14.8 in

Full-Size Keyboard



6.1 in

17.4 in

VS

*Measurements may vary slightly.

Image: The compact keyboard layout, highlighting the integrated numeric keypad.

5. CHARGING AND BATTERY LIFE

Both the keyboard and mouse are equipped with built-in rechargeable batteries, reducing the need for disposable batteries. They charge via a USB-C cable.

- **Charging:** Connect the provided USB-C cable to the charging port on the keyboard/mouse and a power source.
- **Charging Time:** A full charge typically takes 3-4 hours.
- **Battery Life:** Up to 7 days of continuous use on a single charge. Standby time can extend up to 365 days.
- **Smart Sleep Mode:** The devices automatically enter a smart sleep mode after 90 seconds of inactivity to conserve battery life. This mode cannot be manually turned off.



Image: The keyboard and mouse connected via USB-C cables for charging, illustrating the rechargeable feature.

6. MAINTENANCE

To ensure the longevity and optimal performance of your SABLUTE KM62 combo, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the surfaces of the keyboard and mouse. For stubborn dirt, a slightly damp cloth with mild soap can be used, ensuring no liquid enters the device.
- **Avoid Spills:** While the keyboard may offer some spill resistance, it is not waterproof. Avoid exposing the devices to liquids.
- **Storage:** Store the devices in a cool, dry place away from direct sunlight and extreme temperatures.
- **USB Receiver:** When not in use, store the USB receiver in its designated slot within the mouse to prevent loss.



Image: The keyboard surface with water droplets, demonstrating its spill-resistant design.

7. TROUBLESHOOTING

If you encounter issues with your SABLUTE KM62 combo, refer to the following common solutions:

7.1. Connection Issues (2.4G or Bluetooth)

- **Ensure Power:** Verify both the keyboard and mouse are powered on and sufficiently charged.
- **Check Receiver:** For 2.4G, ensure the USB receiver is securely plugged into a working USB port.
- **Re-pair Devices:** If connection is lost, try re-pairing.

7.1.1. 2.4G Re-pairing Guide Video

Video: Instructions on how to re-pair the 2.4G connection for the SABLUTE KM62 combo.

7.2. Backlight Not Working or Adjusting

- **Check Power:** Ensure the keyboard is on and charged.
- **Toggle Backlight:** Press **Fn + Backspace** to ensure the backlight is not simply turned off.
- **Adjust Brightness:** Use **Fn + Up/Down Arrow** to adjust brightness levels.

7.2.1. Backlight Adjustment Video

Video: A quick guide on how to adjust the backlight settings for the SABLUTE KM62 keyboard.

7.3. Mouse Not Responding

- **Check Power/Charge:** Ensure the mouse is on and charged.
- **Re-pair:** Follow Bluetooth re-pairing steps if using Bluetooth, or 2.4G re-pairing if using the USB receiver.
- **Surface:** Ensure the mouse is used on a suitable surface.

8. SPECIFICATIONS

Feature	Detail
Brand	SABLUTE
Model Number	KM62
Connectivity Technology	2.4G USB Wireless, Bluetooth
Special Features	Backlit, Multi-Device Connection, Portable, Power-Saving, Rechargeable
Compatible Devices	Laptop, Personal Computer, Tablet, Television
Movement Detection	Optical
Keyboard Backlighting Color Support	RGB (11 effects: 4 RGB modes, 7 solid colors)
Power Source	Battery Powered (Rechargeable)
Keyboard Layout	QWERTY, Compact with Numeric Keypad
Mouse DPI Settings	1200, 1600, 2000
Compatible Operating Systems	Android, ChromeOS, Linux, MacOS, Windows
Item Weight	1.8 pounds
Keyboard Description	Membrane

9. WARRANTY AND SUPPORT

9.1. Manufacturer's Warranty

The SABLUTE KM62 Wireless Keyboard and Mouse Combo comes with a**2-Year Manufacturer Warranty**. Please retain your proof of purchase for warranty claims.

9.2. Customer Support

For any questions, technical assistance, or support needs, please contact SABLUTE customer service:

- **Email Support:** support@sablute.com
- **Phone Support (US):** 1-888-905-9607
- **Operating Hours:** Monday - Friday, 9 AM - 1 PM PST and 2 PM - 6 PM PST



Image: A customer service representative wearing a headset, symbolizing available support.

© 2026 SABLUTE. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question