Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

XuanPad RD-811

XuanPad RD-811 Smart Projector User Manual

Model: RD-811

1. Introduction

Thank you for choosing the XuanPad RD-811 Smart Projector. This manual provides essential information for setting up, operating, and maintaining your device. Please read it thoroughly before use to ensure optimal performance and safety.

2. What's in the Box

Carefully unpack the box and ensure all items are present:

- 1 × XuanPad RD-811 Google TV 4K Smart Projector
- 1 × Remote Control
- 1 × Power Cord
- 1 × User Manual

3. Product Overview

Familiarize yourself with the main components of your XuanPad RD-811 projector.



Figure 3.1: Front view of the XuanPad RD-811 Smart Projector, showcasing the lens and sleek design.

3.1 Key Features

- **Official Google TV:** Access 10,000+ apps and Google Assistant voice control.
- **Sealed Optical Engine:** Dust-free design for long-lasting clarity.
- **4K Decoding & HDR10+:** Supports 4K input with enhanced color and contrast.
- **AI Auto Focus & Keystone:** Automatic picture correction for instant setup.
- **WiFi 6 & Bluetooth 5.3:** High-speed wireless connectivity for streaming and audio.
- **Dual 68W Dolby Audio:** Integrated speakers for immersive sound.

4. Setup

4.1 Placement

Place the projector on a stable, flat surface. For optimal viewing, position it directly in front of your projection screen or

wall. The projector features automatic keystone correction, allowing for flexible placement angles.

4.2 Power Connection

1. Connect the power cord to the projector's power input port.
2. Plug the other end of the power cord into a power outlet.

4.3 Initial Power On & Automatic Adjustments

1. Press the power button on the projector or the remote control to turn on the device.
2. The projector will automatically perform TOF auto-focus and keystone correction to provide a clear, rectangular image.
3. Allow a few seconds for the system to boot up and complete initial adjustments.

4.4 Network & Google TV Setup

1. Follow the on-screen prompts to connect to your Wi-Fi network.
2. Sign in with your Google account to access Google TV features, download apps, and personalize your experience.

Your browser does not support the video tag.

Video 4.1: An unboxing and introduction video for the RD811 projector, demonstrating initial setup steps and features.

5. Operating Instructions

5.1 Google TV Interface

Navigate the Google TV home screen using the remote control. You can browse recommended content, access installed apps, and manage settings.

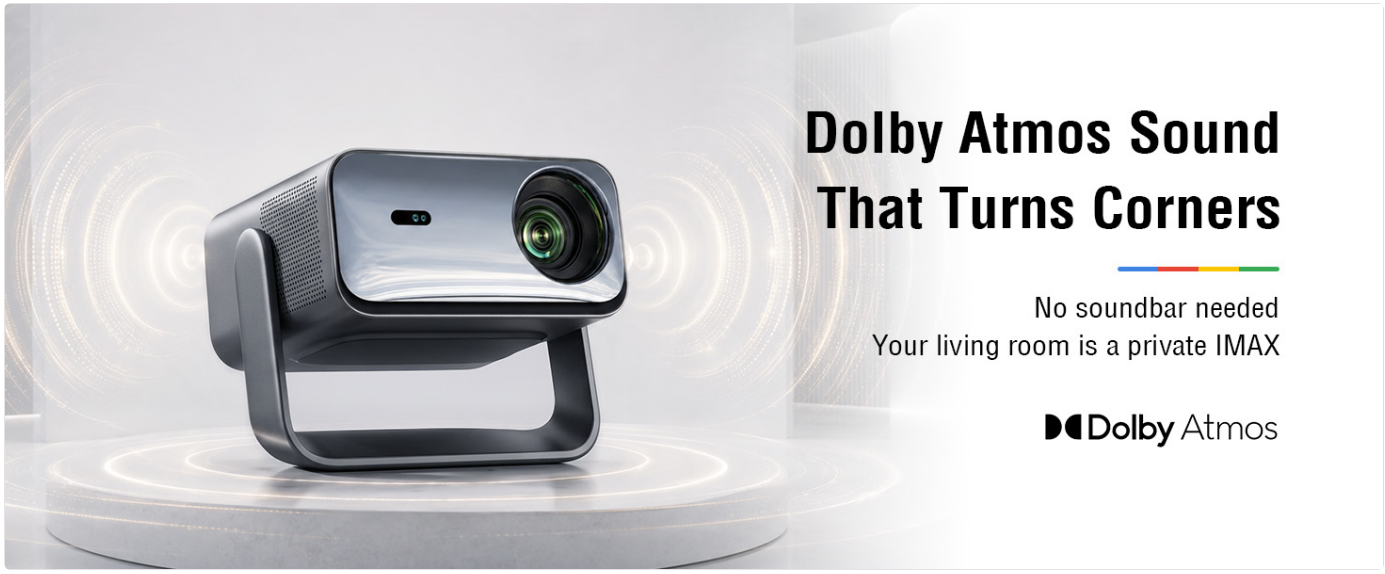

Figure 5.1: The Google TV interface displayed on the projector, showing various streaming app icons and content suggestions.

5.2 Voice Control (Google Assistant)

Press the Google Assistant button on your remote control and speak into the microphone to search for content, control playback, or get information.

5.3 Connectivity

- **HDMI:** Connect external devices like gaming consoles, Blu-ray players, or laptops using an HDMI cable. The

projector supports HDMI ARC/CEC for enhanced audio control.

- **USB:** Plug in USB drives to play media files directly.
- **Bluetooth 5.3:** Pair Bluetooth headphones or external speakers for private listening or amplified audio.
- **WiFi 6:** Enjoy high-speed wireless streaming and screen mirroring from compatible iOS, Android, and Windows devices.

5.4 Picture Adjustments

- **Digital Zoom:** Use the remote control to adjust the screen size from 50% to 100% without moving the projector.
- **Manual Focus/Keystone:** While automatic adjustments are standard, you can fine-tune focus and keystone correction through the projector's settings menu if needed.

5.5 Audio Settings

The projector features dual 68W Dolby Audio speakers. You can adjust volume via the remote. For external audio, connect via Bluetooth or the 3.5mm audio jack.

5.6 Kids Mode

Access Kids Mode through the Google TV interface to provide a family-friendly viewing environment with curated content and parental controls.

Your browser does not support the video tag.

Video 5.2: A feature overview video for the RD811, highlighting its smart capabilities, picture quality, and connectivity options.

6. Maintenance

6.1 Cleaning

- **Lens:** Gently wipe the projector lens with a soft, lint-free cloth specifically designed for optical surfaces. Do not use abrasive cleaners.
- **Exterior:** Clean the projector's exterior with a soft, dry cloth. Avoid using liquid cleaners directly on the device.

Note: The XuanPad RD-811 features a sealed optical engine, significantly reducing dust accumulation inside the projector and minimizing the need for internal cleaning.

6.2 Storage

When not in use for extended periods, store the projector in a cool, dry place, away from direct sunlight and extreme temperatures. Use the original packaging or a protective case to prevent dust and damage.

6.3 Firmware Updates

The projector may receive periodic firmware updates to improve performance and add new features. Check for updates in the system settings menu under 'About' or 'System Update'.

7. Troubleshooting

If you encounter issues, refer to the following common problems and solutions:

Problem	Solution

Problem	Solution
No power	Ensure the power cord is securely connected to both the projector and the power outlet. Try a different outlet.
No image	Check if the projector is powered on. Verify the input source (HDMI, USB) is correctly selected. Ensure connected devices are powered on.
Blurry image	Allow auto-focus to complete. If still blurry, manually adjust focus in the settings. Ensure the lens is clean.
No sound	Check the volume level. Ensure external audio devices are properly connected and selected. Verify the audio output settings on connected source devices.
Remote control not working	Check and replace batteries. Ensure there are no obstructions between the remote and the projector.
Wi-Fi connection issues	Ensure the projector is within range of your Wi-Fi router. Restart your router and the projector. Re-enter Wi-Fi password.

8. Specifications

Detailed technical specifications for the XuanPad RD-811 Smart Projector:

Feature	Specification
Brand	XuanPad
Model Name	RD-811
Native Resolution	1920 x 1080 (Full HD)
Max Display Resolution	4096 x 2160 pixels (4K Decoding)
Brightness	9500 ANSI Lumens
Focus Mode	AI Auto Focus
Keystone Correction	AI Auto 4P/6D Keystone
Projection Size	40 - 250 inches
Operating System	Google TV 11.0
Wireless Connectivity	WiFi 6, Bluetooth 5.3
Ports	HDMI (ARC/CEC), USB, 3.5mm Audio Jack
Noise Level	< 30 dB
Controller Type	App Control, Voice Control, Remote Control
Dimensions (L x W x H)	12.17" x 9.7" x 9" (approx.)
Weight	8.8 lb (approx.)

9. Warranty and Support

The XuanPad RD-811 Smart Projector comes with a **2-Year Protection Plan** and **Lifetime Customer Care**. For any technical assistance, warranty claims, or support inquiries, please contact XuanPad customer service through the official website or your purchase platform.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question