



Blitzwolf BW-FPE1 ENC TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver User Manual

[Home](#) » [Blitzwolf](#) » [Blitzwolf BW-FPE1 ENC TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver User Manual](#) 



User Manual
RW-1-3E1


Contents

- [1 Packaging Contents](#)
- [2 The figure of Product's Functions](#)
- [3 Instruction for Use of the Product](#)
- [4 Pair the Device with Bluetooth](#)
- [5 Pair with the Device when a Single Headset is in Use](#)
- [6 Power on/off](#)
- [7 Recover to Default Setting](#)
- [8 Description of Bluetooth Earphone Indicator](#)
- [9 Description of Charging Stand Indicator](#)
- [10 Specification](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

Packaging Contents

- 1 X BW-FPE1 earphone (1 pair of headsets)
- 1 X USB Type-C charging cord
- 1 X Charging box 1 operating manual

The figure of Product's Functions

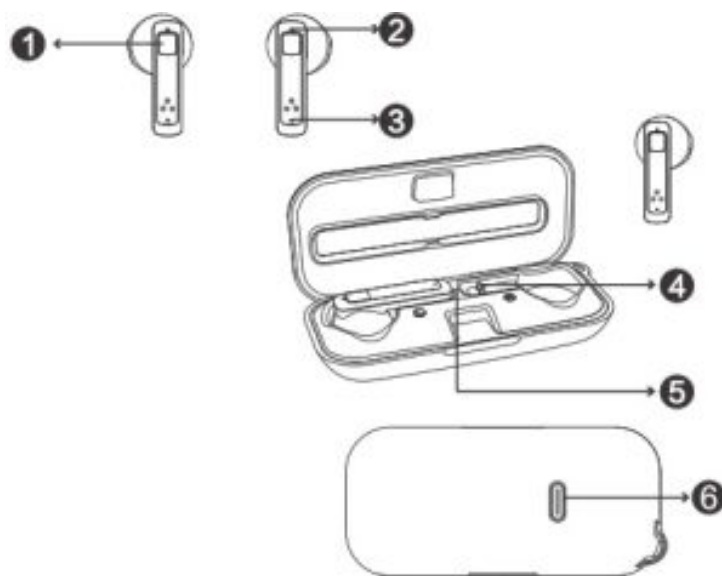

1. Multi-function key
2. Earphone indicator
3. Microphone
4. Charging probe
5. Indicator of charging box
6. Type-C USB charging port

Instruction for Use of the Product

1. Before using the earphone for the first time (or not used for a long time), be sure to put the headsets in the charging compartment and connect the Type-C charging cord and charge the charging compartment. The indicator will be in red when the headsets are in a charging state, and it will turn off automatically after charging is completed.
2. There is a battery in the charging compartment, and the headsets can be charged after the battery is fully charged, and there's no need to connect them to the Type-C USB cord.
3. This product is not equipped with a charging adapter (it is recommended to use a charger with an output specification of 5V-1A)
4. Be sure to put on the upper cover of the charging box when the headsets are being charged with the charging box.
5. Syllable S8 has a master-slave switching function. Put one of the earphones into the charging box (the earphone will be turned off and charged), and the other earphone will automatically switch to single earphone mode (the earphone music will not stop at this time). Take out the headset in the charging box, it will automatically match the left and right binaural mode and realize the stereo function.

Pair the Device with Bluetooth

1. For use for the first time) open the upper cover of the charging stand, pick up the left and right headset from the charging box and pairing will be started automatically. When the indicators of the R-end headsets flash in red and white alternately, the earphone enters the pairing state
2. Turn on the Bluetooth search function of the mobile phone. The setting steps usually involve functional menus of "Setting", "Connecting" or "Bluetooth" on the device. For 10S: After Setting/Bluetooth/Enabling, Bluetooth

device will be searched automatically; For Android: Setting/Bluetooth/Enabling/Searching Device.

3. When a device named "BW-FPE1" is found, click to pair.
4. The pairing mode lasts for 60 seconds. Make sure to pair with the device within the pairing time.
5. After the pairing is successful, there will be a prompt tone of "Connected".

Pair with the Device when a Single Headset is in Use

1. Pick up any headset from the charging compartment, and it will enter into a pairing state automatically in about 10 seconds (if it has been paired with the mobile phone, it will be automatically connected in about 5 seconds).
2. When the indicator of the headset flash in red and blue alternately, the headset enters the pairing state.
3. When the device name is searched, click to connect.

Power on/off

1. Power on/off single headset
Power on: Long Press the multi-function key for 2 seconds until a voice prompt of "Power on" is heard in the headset. At this time, the Bluetooth blue indicator will be on for 1 second.
Power off: Long Press the multi-function key for about 5 seconds, until a voice prompt of "Power off" is heard in the headset. At this time, the Bluetooth red indicator will be on for 1 second.
2. Power on/off with headsets in the charging compartment
The earphone is put in the charging compartment: when the upper cover of the charging box is closed, the red indicator on the earphone will be on, and it will enter the charging state.
Open the upper cover of the charging stand, pick up the left and right headsets from the charging box, and they will be started automatically and enter the pairing mode.
Automatic shutdown: when Bluetooth is not connected to any device, it will be turned off automatically in 5 minutes.

Recover to Default Setting

When Bluetooth is not connected and in a single headset state, press the touch key 5 times to clear all pairing information, the red and blue lights flash 3 times at the same time, put the earphones in the charging box, then you can pick up the left and right headsets from the charging box for -MS pairing.

Answer the Call

Press the multi-function key twice on earphones the left and right headsets can be operated.

Reject the Call

Long Press multi-function key for 1.5 seconds, and the left and right headsets can be operated. Long Press multi-function key for 1.5 seconds, and the left and right headsets can be operated.

Hangup the Call

Press the multi-function key twice on the earphone, both headsets can be operated.

Music Mode Switching

1. When music is playing, double press the multi-function key on the left or right headset to pause or play music.
2. When playing music, press the multi-function key, the music volume will be reduced in the left earphone and increased in the right earphone.

3. When music is playing, Long Press the multi-function key on the earphone for 1.5 seconds to switch to the previous song on the left headset, and switch to the next song on the right headset.

Voice Assistant

Press the multi-function key on the earphone three times to start Sid, and the left and right headsets can be operated. Press the multi-function key on the earphone three times to close Sid, and the left and right headsets can be operated.

Note: the operation is different according to the different functions of the device.

Description of Bluetooth Earphone Indicator

1. Pairing mode of mobile phone and earphone: the red and blue lights flash alternately.
2. TWS pairing mode: the blue light flashes
3. Power on: the blue light is on for 1 second
4. Power off: the red light is on for 1 second
5. Charging: the red light is always on
6. Fully charged: the red light is off

Description of Charging Stand Indicator

When the USB cable is charging the charging box, the red light is on, and the light is off when it is fully charged.

Specification

The battery is charging compartment: 300mAh

Use time: about 4 hours Type-C: USB charging port

Standby time: 90 hours Support: HFP, HSP, AVRCP, A2DP

Charging time: about 2 hours

Working range: 10M

Headset Battery: 30mAh for single side

MADE IN CHINA




SCHEUFER Technologies GmbH
Address: Hertleinstrasse 37, 91052, Erlangen, Germany
E-mail: Mark.Zhang@scheufer.com



VISHTEC UK Co., Ltd
Address: Unit G25 Waterfront Studios, 1 Dock Road, London, E16 1AH
E-mail: Vincent.feng@vish-tec.com

Documents / Resources

	<p>BLITZWOIF BW-FPE1 ENC TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver</p> <p>r [pdf] User Manual</p> <p>BW-FPE1, ENC TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver, BW-FPE1 ENC TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver, TWS Bluetooth V5.0 Headset with 13mm Large Dynamic Driver, 13mm Large Dynamic Driver Headset, TWS Bluetooth V5.0 Headset, Bluetooth V5.0 Headset, V5.0 Headset</p>
---	---