

Bluedio BS-6 User Manual

[Home](#) » [Bluedio](#) » Bluedio BS-6 User Manual 

USER MANUAL

Model: BS-6

Bluetooth Speaker

Welcome to your new Bluedio speaker

We appreciate your choice of Bluedio speaker. Before use, please read this user manual carefully and keep for future reference.

Purchase verification

You can find the verification code by scraping the coating off the security label that is affixed to the original packaging. Enter the code on our official website: www.bluedio.com for purchase verification.

Learn more and get support


Welcome to visit our official website:

www.bluedio.com;


Or to email us ataftersales@bluedio.com;

Or to call us at 400-889-0123.

Speaker overview

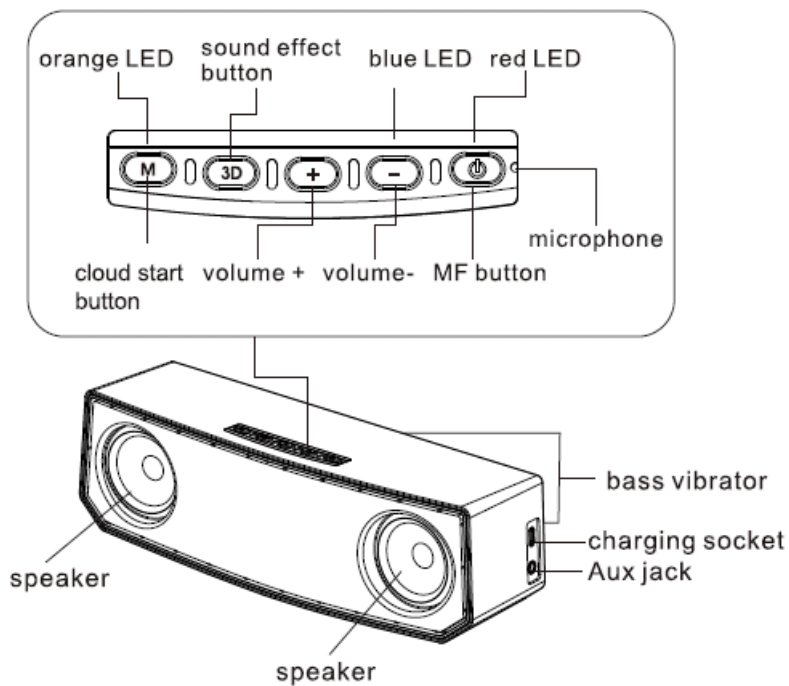

In the box

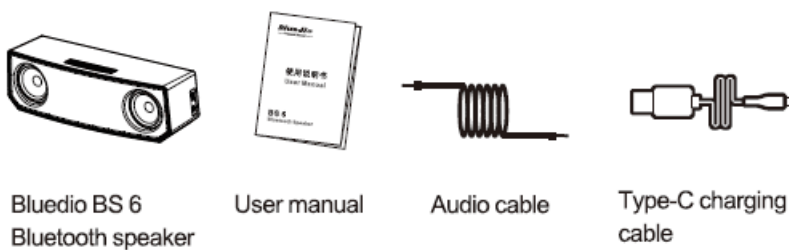


Charge and battery

1. Charging cable: Use the included charging cable or the speakers may be damaged. (The charging socket of the speaker is Type-C plug.)
2. Charger: If you use a charger for charging, its output DC voltage should be 5V:1:0.3V, and its output current should exceed 1000mA.

Charge the speaker:

The built-in battery of the speaker is rechargeable and non-detachable. Do not replace the battery.

1. Turn off the speaker before charging.
2. Connect the Type-C plug(the smaller plug) of the charging cable to the charging socket of the speaker; Connect the other plug to the USB socket of your computer or other charging device. When charging, you will see the red LED stays on.
3. When fully charged(takes about 3-4 hours), you will see the blue LED stays on or the red LED goes out.

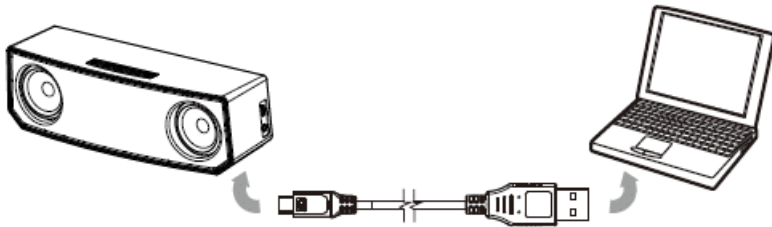

Operation

Power on

Press and hold the MF Button until you hear “Power on” or you see the blue light blinks.

Power off

Press and hold the MF Button until you hear “Power off”.

Enter pairing mode

When the speaker is off, press and hold the MF B until you hear “Pairing”.

Pair the speaker with your mobile phone

1. Keep the distance between the speaker and your mobile phone (or other device) within 1 meter.
The closer, the better.
2. Make sure the speaker enters pairing mode. (See instruction “Enter pairing mode”)
3. Switch on the Bluetooth of your mobile phone, add/search devices.
4. When “BS 6” appears, select it. (If asked for a pass code: Enter “0000”)
5. Finish.

Attention: If the pairing is not successful within 120 seconds, the blue LED will go out and the speaker is out of pairing mode. Please repeat the pairing procedure to try again .

Using the speaker to talk (in Bluetooth mode)

Answer a call

When there is an incoming call, press the MF button once to answer it. Or use your mobile phone to answer it.

End a call

When you are on call, press the MF button once to end it. Or use your mobile phone to end it.

Reject a call

When there is an incoming call, press and hold the MF button for 2 seconds to reject it. Or use your mobile phone to reject it.

Voice control (need your mobile to support)

Press and hold the MF button for about 2 seconds.

Redial the last number

Press the MF button twice continuously.

Switch phone calls:

Receiving can 2 in Gall 1, press the MF button once to end Gall 1 and answer Gall 2; press and hold the MF button to hold on call 1 and answer Call 2. Press and hold the MF button can switch between Call 1 and Cell 2; press once to end the call.

Track/ Volume control (in Bluetooth mode)

Pause/Play: Press the MF button once Previous track: Press and hold the Volume- button for about 3 seconds

Next track: Press and hold the Volume+ button for about 3 seconds

Volume Up: Press the Volume+ button

Volume Down: Press the Volume- button

Sound effect switching

When playing music via Bluetooth, press the sound effect button can change the sound effect.

Line-in music playback

Turn off the speaker first, and then use the standard 3.5mm audio cable to connect the speaker with your mobile phone.


If the speaker has connected with your mobile phone via Bluetooth, it will automatically switch to Bluetooth mode when answering an incoming call.

Cloud function

The speaker supports Alibaba Cloud Computing and other cloud platform. Users can download the app by scanning the QR code on page 70.

Wake up the cloud (have installed the cloud app on your phone)

Connect the speaker with your phone via Bluetooth; click the cloud start button and the orange LED stays on.

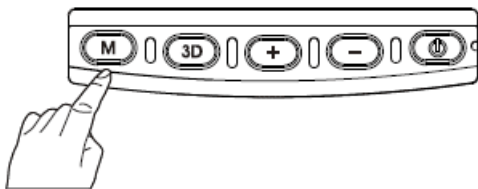**Specifications**

Bluetooth version: 5.0

Bluetooth transmission frequency: 2.4GHz to 2.48GHz

Bluetooth operating range: up to 33 feet (free space)

Bluetooth profiles: A2DP, AVRCP, HSP, HFP

Frequency response: 20Hz-20,000Hz

Audio output power: 2*5W

Audio input: VRMSs1V

Standby time: 1000 hours

Music/talk time: 5 hours

Charging time: 3-4 hours for full charge
Operating temperature range: -10 °C to 50°C only

Specifications are subject to change without notice .

[Bluedio BS-6 User Manual](#)

Download

Questions about your Manual ? Post in the comments!

Manuals+.