



BRIZO 8SP-MU-3 Bluetooth Compatible Audiotherapy Module with Two Invisible Speakers Instruction Manual

[Home](#) » [BRIZO](#) » BRIZO 8SP-MU-3 Bluetooth Compatible Audiotherapy Module with Two Invisible Speakers Instruction Manual 

BRIZO[®]

8SP-MU-3, EP103441 AUDIO MODULE
AND EP103442 INVISIBLE SPEAKERS
INSTRUCTIONS

Contents

- [1 8SP-MU-3 Bluetooth Compatible Audio therapy Module with Two Invisible Speakers](#)
- [2 Audio Module Installation](#)
- [3 Invisible Speaker Installation](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

8SP-MU-3 Bluetooth Compatible Audio therapy Module with Two Invisible Speakers



Model Number: _____

Date of Purchase: _____

Register Online: www.brizo.com/customer-support/product-registration

To reference replacement parts and access additional technical documents and product info, visit www.brizo.com



1-800-355-6478

www.brizo.com/customer-support/contact-us

Read all instructions prior to installation.



CAUTION

Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.

IMPORTANT: The 8SP-MU-3 audio configuration is designed to work with the 8GE-TSG series steam generators. To operate the 8SP-MU-3 audio configuration, a 8CN-600, 8CB-600 or 8CH-600 Series control is also required.

Audio Module Installation



CAUTION

To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

- Select a location for mounting the audio module in a utility area or closet. The audio input jacks on the side of the module should be conveniently accessible to plug in additional audio inputs. Secure to the wall with screws. Do not install any part of this assembly inside a wall.
- Make sure a 120 volt outlet is located near the module mounting location. Plug in the 5' power cord (supplied) after all connections are complete.
- Route the control cable from the module location to the 8GE-TSG series steam generator, or optional R80000E, 8SP-MU-4 and/or 8SP-MU-5. The manners in which the cables are routed are dependent on what is best suited for the installation. There are multiple connection jacks in 8GETSG series steam generator, two in the 8SP-MU-5, two in the R80000E, two in the 8SP-MU-4, and two on this module allowing for gangable connections in the most convenient arrangement (See figure 3 for the system wiring diagram).
- Indicator lights, (See Figure 1):

Green Light (Power Light): This along with the blue and yellow light will flash momentarily when the power is first plugged in. This flash indicates the microprocessor is functioning and is a test for the lights. Yellow Light (Communication Light): This light is an indicator that the system is not communicating with the control. After the initial power up the light will continue to flash until communication is established with the 8CH-600, 8CB-600 or 8CN-600 series control. To establish communication, power to the 8CH-600, 8CB-600 or 8CN-600 series control must be turned on. If power is already on go to the 8CH-600, 8CB-600 or 8CN-600 series control and start a steam or shower cycle for a few seconds. Then stop or cancel the cycle. This action will make the 8CH-600, 8CB-600 or 8CN-600 series control look for the audio system and establish communication. When the audio module is communicating with the 8CH-600, 8CB-600 or 8CN-600 series control this light will be off. Blue Light (Bluetooth Light): This light will be on steady when the bluetooth signal is broadcasting and not paired with a device. When a device is paired the light will flash. The light will turn off if bluetooth is turned off on the 8CH-600, 8CB-600 or 8CN-600 series control.

- Refer to the wiring diagram on (Figure 3) for connecting the speakers to the audio control module or invisible speakers.

Figure 1
Side View


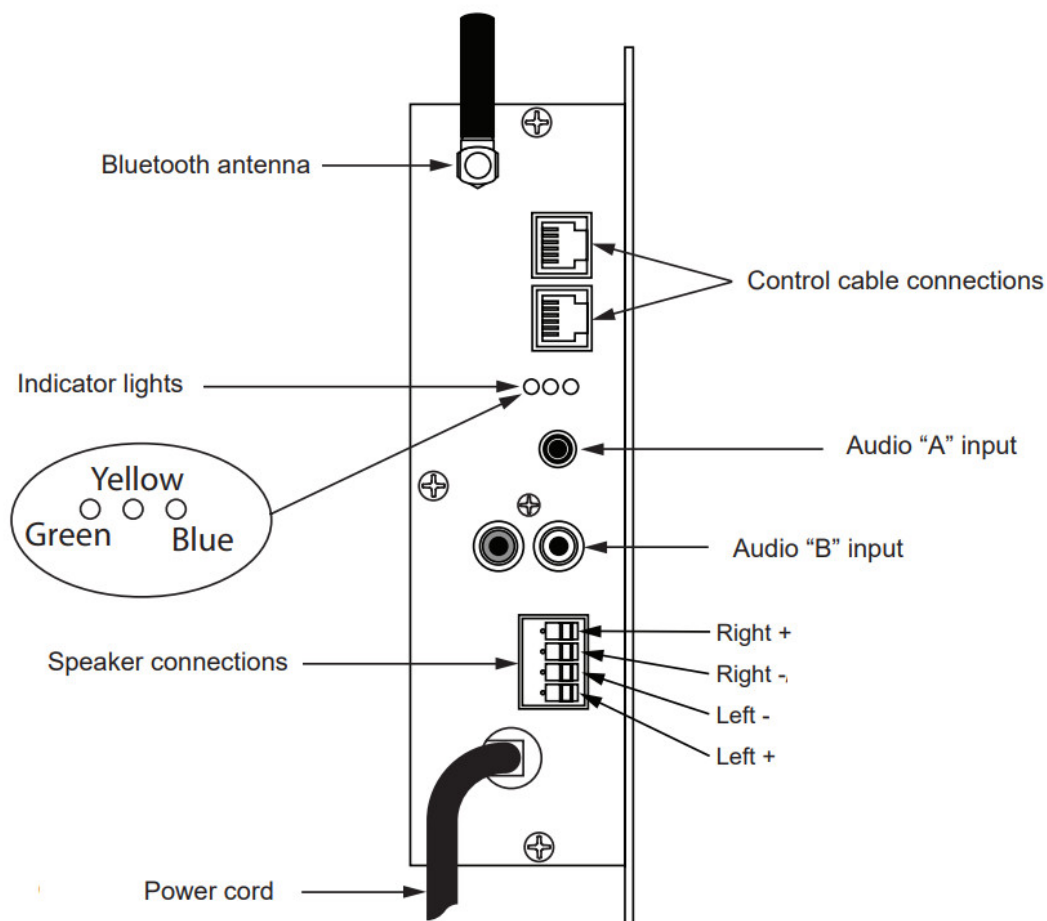


Figure 3

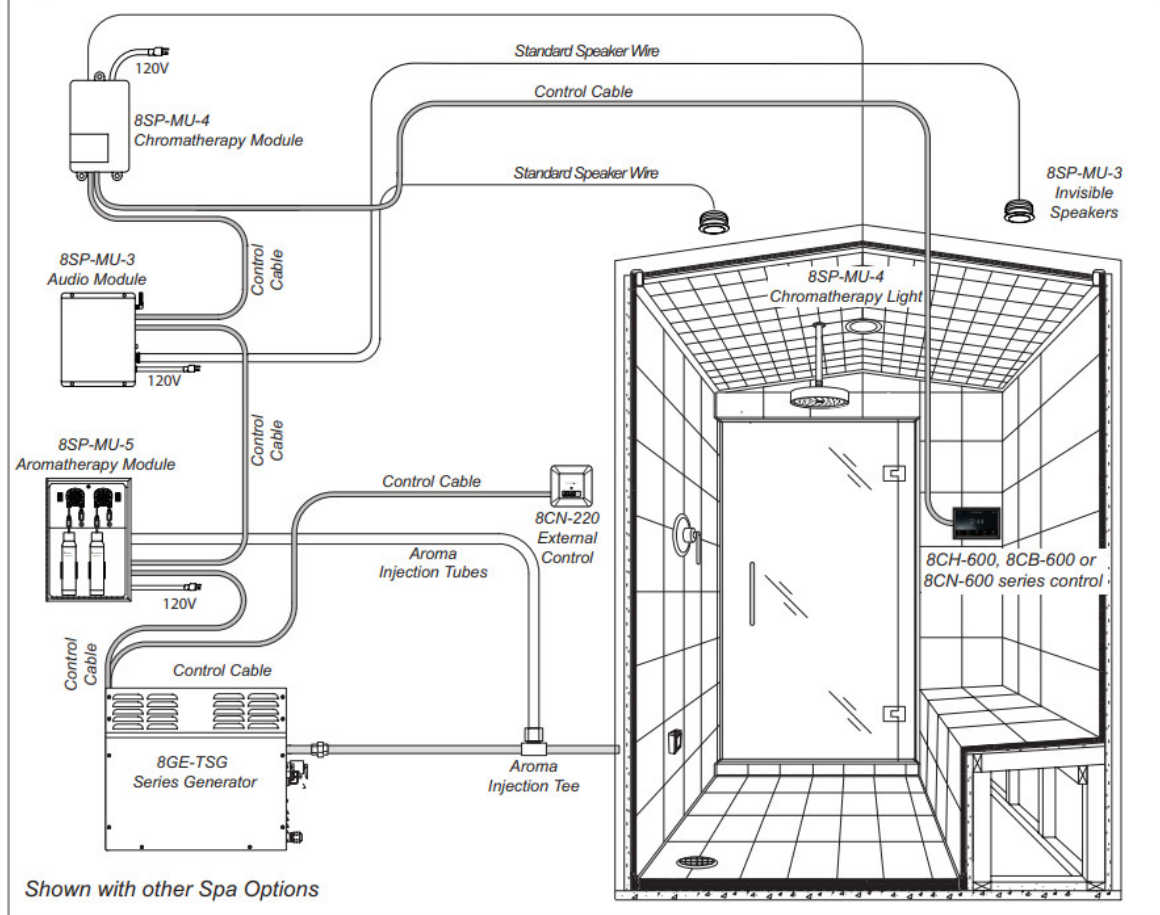

Invisible Speaker Installation



IMPORTANT: For optimum performance, the thickness of tile should not be more than ½". If the wall/ceiling material is too dense, the invisible speakers will not work properly.

1. Select a suitable location to mount the 8SP-MU-3 invisible speakers. Future access for service should be considered. Optimum speaker location is in the ceiling above the steam or shower area where space above it is unoccupied, such as attic space. Speakers may also be installed onto walls with consideration that the space behind the wall is a closet or space where sound will not disturb occupied space. This will minimize the sound penetrating adjacent rooms and provide future access. The speakers are intended to be installed outside the shower and out of sight.
2. Speakers should be mounted on opposite sides of the room. Center between the joist/studs (See Figure 3).
3. Remove adhesive liner from speaker and attach it to the cement board between the joist/studs (See Figure 2). Repeat for second speaker on opposite side of the room.
4. Route speaker wires to the 8SP-MU-3 Audio Module.
The positive speaker leg is red and the negative speaker leg is black (as shown in Figure 3).
5. Test speakers before closing walls.

NOTE: Invisible speakers are designed to transfer energy through the surfaces they are mounted to and must be mounted behind the wall or ceiling. As with all audible devices, sound may be present outside of the immediate steam room area.

Figure 2

Do NOT mount directly to tile.

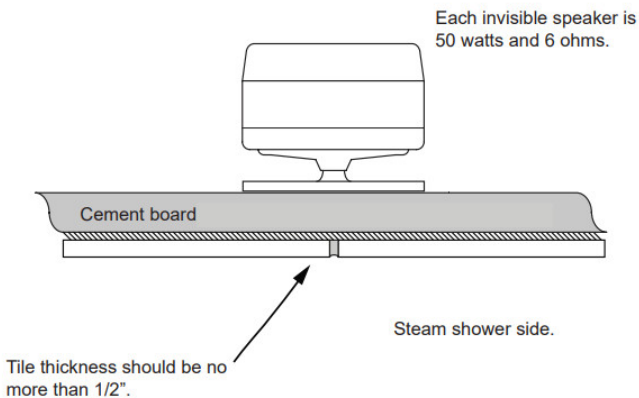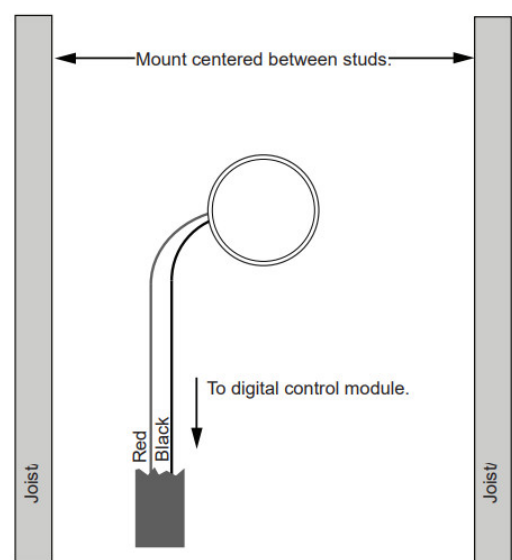**Figure 3**

This device complies with part 15 of the FCC Rules. This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s) and operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an output on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Pursuant to FCC 15.21 of the FCC rules, changes not expressly approved by Delta Faucet Co. might cause harmful interference and void the FCC authorization to operate this product.

Limited Warranty on Brizo® Steam Bath and Steam Shower Products Applicable to products purchased and installed in the USA and Canada

Residential Steam Bath Generators: Brizo Kitchen and Bath Company ("Brizo") warrants to the original consumer purchaser that the parts (except for electronic parts) of its residential steam bath generator purchased from authorized Brizo sellers will be free from defects in materials and workmanship for as long as the original consumer purchaser owns the home in which the steam bath was originally installed. This lifetime limited warranty does not apply to residential steam bath generators that are used in commercial applications (as defined herein).

Residential Electronic Parts, Controls, Spa Options and Accessories: Brizo warrants to the original consumer purchaser that the electronic parts of its steam bath generator and its controls, spa options and accessories purchased from authorized Brizo sellers will be free from defects in materials and workmanship for a period of two (2) years from the date that the product is received by the original consumer purchaser or their authorized representative (installation contractor, etc.).

This two-year limited warranty does not apply to controls, spa options, electronic parts and accessories that are used in commercial applications (as defined herein).

Commercial Warranty: For the purposes of this warranty the term "commercial application" refers to installation in any setting in which the product is not being used for personal household use, including, but not limited to, hospitality applications, day spas and short-term and long-term rentals.

Brizo warrants that the parts (including electronic parts) of its steam bath generators (including steam bath generators with model numbers beginning with 8GE that are 7.5kW-15kW), equipment, controls, electronic parts, spa options and accessories purchased from authorized Brizo sellers and used in a commercial application will be free from defects in materials and workmanship for a period of one (1) year from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).

What We Will Do: Brizo will, at its option, repair or replace, free of charge, any part that proves defective in material and/or workmanship under normal installation, use and service during the applicable warranty period as stated above.

Brizo may elect to refund the purchase price. Replacement parts are subject to availability and may differ from those originally supplied.

For residential applications, two (2) years following the date that the product was received by the original consumer purchaser or their authorized representative (installation contractor, etc.) and with prior approval by Brizo, Brizo will pay for labor for repair/replacement associated with warranty coverage.

Thereafter, Brizo will not pay for labor associated with removal/repair/replacement of products covered by this warranty.

For commercial applications, Brizo will, with prior approval by Brizo, pay for labor associated with warranty coverage for ninety (90) days from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).

Thereafter, Brizo will not pay for labor associated with removal/repair/replacement of products covered by this warranty.

These are the consumer's exclusive remedies.

What Is Not Covered: Because Brizo is unable to control the quality of Brizo products sold by unauthorized sellers, unless otherwise prohibited by law, this warranty does not cover Brizo products purchased from unauthorized sellers.

This warranty does not cover damage caused by improper or negligent installation or use. Provided that Brizo is paying the cost of the labor under the terms above, this warranty does not cover repairs attempted by any person other than

an authorized Brizo agent and shall be limited to the repair or replacement of defective parts by Brizo or its authorized agent.

This warranty is void if any of the following should occur:

- The use of the product for an unintended application, including a commercial application for all products except those products for which a commercial application is appropriate.
- Failure to follow instructions, including care, cleaning and usage instructions, provided in the product's owner's manual.
- The product's serial number has been altered or removed.
- The product is modified in any manner which Brizo concludes, after its inspection, affects the reliability of the product.
- The product has been improperly repaired by anyone not specifically designated or authorized by Brizo.
- The product is damaged because it is not operated or installed in accordance with supplied instructions.
- The product is installed outdoors.
- The product is installed in a moist and/or humid area with unconditioned air or temperatures that exceed 104 degrees Fahrenheit.
- The product is damaged due to freezing.
- The product is damaged by acts of God.

How to Make a Warranty Claim: To obtain warranty repair or replacement, contact Brizo at: 800-355-6478 or steamprodserv@brizo.com to receive an RGA# (Return Goods

Authorization number) which must be on the carton that is returned via UPS Ground or equivalent. Proof of purchase (original sales receipt showing purchase date) identifying the model and serial number and documentation of the date of receipt of the product by the original purchaser or their authorized representative (installation contractor, etc.) must accompany all warranty claims.

Limitation on Duration of Implied Warranties: Please note that some states/provinces (including Quebec) do not allow limitations on how long an implied warranty lasts, so the below limitations may not apply to you.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ANY IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED TO THE STATUTORY PERIOD OR THE DURATION OF THIS WARRANTY, WHICHEVER IS SHORTER.

Limitation of Special, Incidental or Consequential Damages: Please note that some states/provinces (including Quebec) do not allow the exclusion or limitation of special, incidental or consequential damages, so the below limitations and exclusions may not apply to you.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS WARRANTY DOES NOT COVER, AND BRIZO SHALL NOT BE LIABLE FOR, ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES WHETHER ARISING OUT OF BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, BREACH OF CONTRACT, TORT, OR OTHERWISE.

Additional Rights: This warranty gives you specific legal rights, and you may also have other rights which vary from state/province to state/province. This is Brio's exclusive written warranty and the warranty is not transferable.


BRIZO®

113380



X00113380

Documents / Resources

	<p>BRIZO 8SP-MU-3 Bluetooth Compatible Audiotherapy Module with Two Invisible Speakers [pdf] Instruction Manual</p> <p>8SP-MU-3 Bluetooth Compatible Audiotherapy Module with Two Invisible Speakers, 8SP-MU-3, Bluetooth Compatible Audiotherapy Module with Two Invisible Speakers, Compatible Audiotherapy Module with Two Invisible Speakers, Audiotherapy Module with Two Invisible Speakers, Module with Two Invisible Speakers, Two Invisible Speakers, Invisible Speakers, Speakers</p>
---	---

References

- [Brizo](#)
- [Contact Us : Customer Support : Brizo](#)
- [Product Registration : Customer Support : Brizo](#)
- [User Manual](#)