



BYINTEK K45 Series LCD Smart Android Projector User Manual

[Home](#) » [BYINTEK](#) » BYINTEK K45 Series LCD Smart Android Projector User Manual 

BYINTEK K45 Series LCD Smart Android Projector User Manual



Contents

- 1 Safety notice
- 2 Interface introduction
- 3 Remote control introduction
- 4 Media connection
 - 4.1 Media input slot connection
 - 4.2 HDMI equipment connection
- 5 Projector connection introduction
 - 5.1 Connection introduction
- 6 Setup menu
 - 6.1 Picture setting
 - 6.2 System setting
 - 6.3 Other settings
- 7 Keystone
- 8 Adjust the focal length
- 9 Safety notice
- 10 Interface introduction
- 11 Remote control introduction
- 12 Multimedia connection
 - 12.1 USB input slot connection
 - 12.2 HDMI equipment connection
 - 12.3 3.5mm audio device connect
- 13 Projector connection introduction
 - 13.1 Connection introduction
- 14 Search page
- 15 Menu setup
- 16 My application
- 17 Optical Focusing & Manual Focusing
- 18 Technology Features
 - 18.1 Basic parameters
 - 18.2 Projector distance & size
- 19 Documents / Resources
- 20 Related Posts

Safety notice



1. Please read Manual carefully before you use the projector.
2. To ensure stable power supply, please use national standard power cable and power cord with grounding.
3. Please use the power type marked on the projector or the power cord provided for power supply.
4. Please do not disassemble the machine yourself, otherwise the company will not undertake free warranty service.
5. Do not look directly at the projector lens while the machine is working to avoid damage your eyes.
6. To prevent clogging the projector vents, do not cover it with cloth, carpet or other materials.
7. This projector does not have waterproof function, please keep it away from rain, moisture and other items containing liquid such as vase, cup, etc.
8. To avoid electric please keep the projector away from rain or water or moisture.
9. And cut off the power supply if do not use this project for along time.
10. Use the originally foam or other unit-shock material to protect projector, if you need transport this projector.
11. If you find the projector have problems, please contact with the supplier, do not repair by yourself.
12. To extend the projector life span and protect your eyesight, we suggest you may have a break after 3-4 hours

using.


Maintain Indication:

1-year warranty from factory, for more warranty information, please contact with supplier (warranty service is not including the frame, manual, package, and some subjective idea about the video, sound, image aspects).

Interface introduction

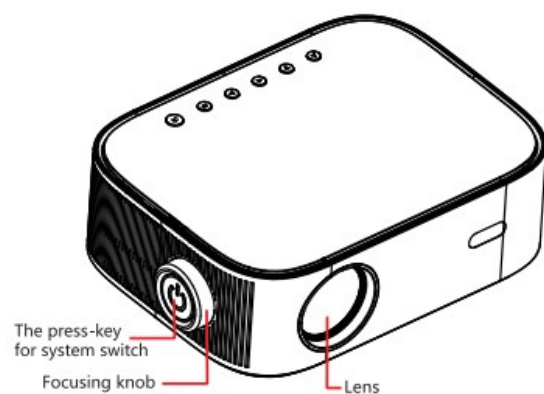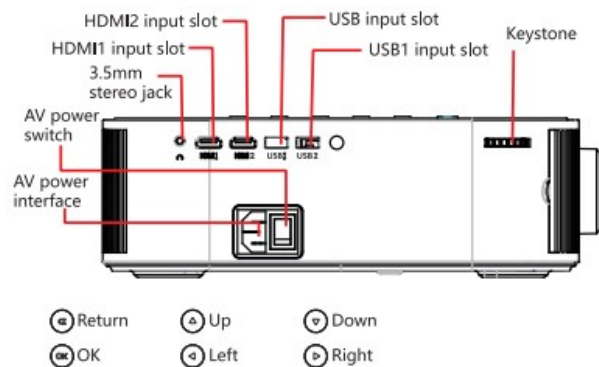

Remote control introduction

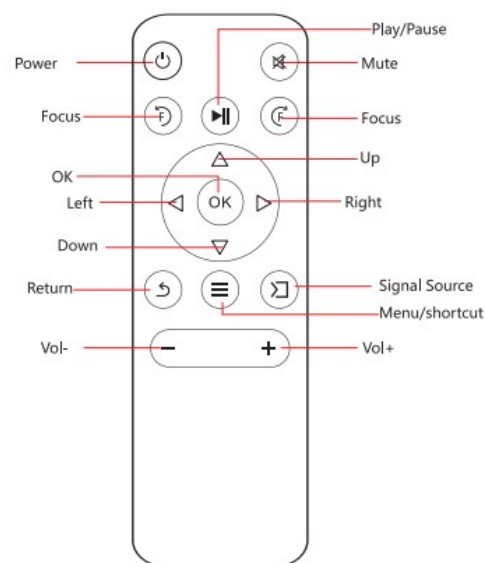

*NOTE:



1. To avoid power shortage, please do not mixed use the old and new battery,
2. To avoid battery leakage corrosion, if do not use remote control for a long time, please take the battery out

- When using the remote control, please align the remote control signal transmitter to the projector's infrared signal reception window.

Media connection



Media input slot connection

Connect the USB drive with the content to the projector USB port, select "Media", you can select movies, music, photo, text on the list.

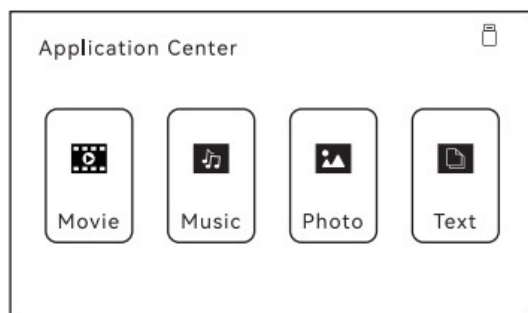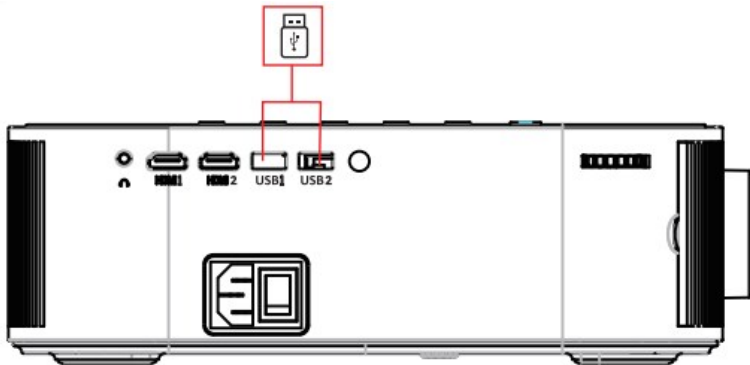


HDMI equipment connection

HDMI slot could connect to computer and all the device with **HDMI** slot. As connected, choose the source **HDMI**.

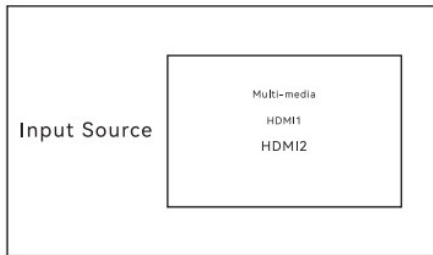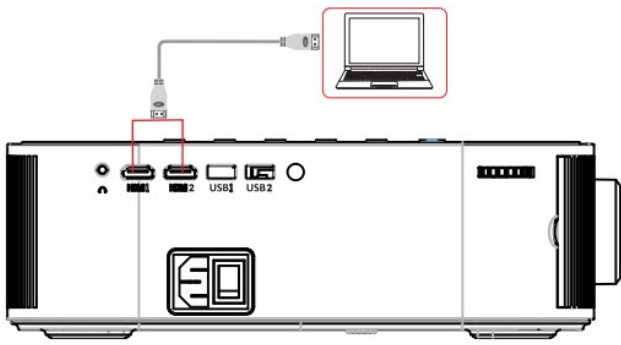


3.5mm audio device connect

Could connect 3.5mm earphone and speaker equipment.

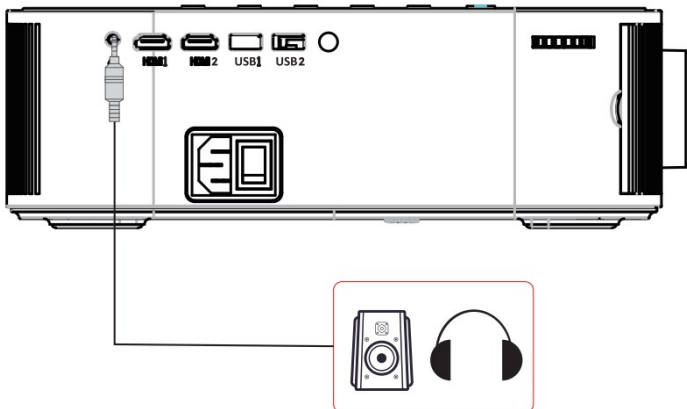

Projector connection introduction

Connection introduction

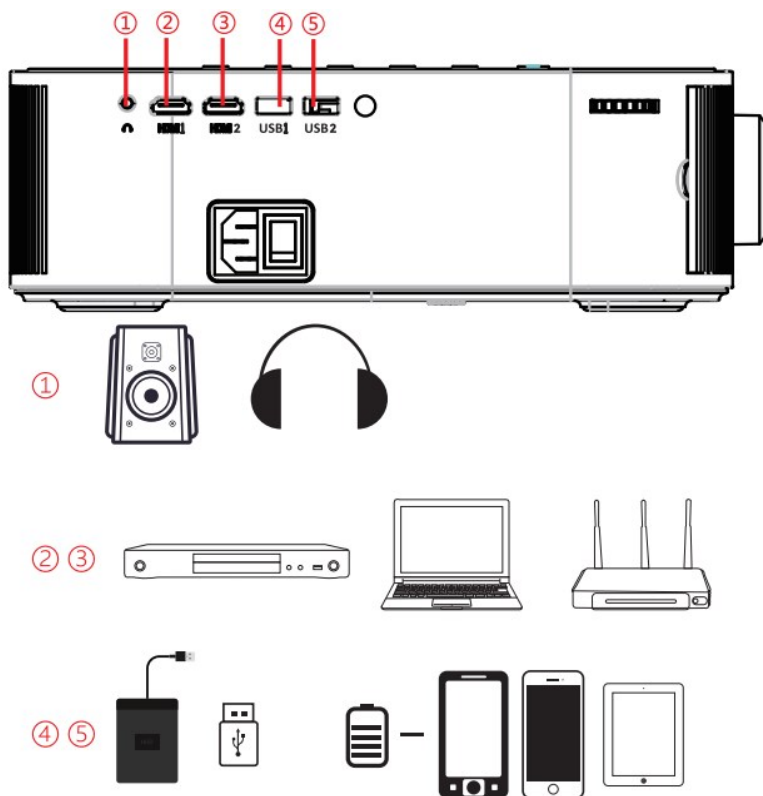


Could connect multi-device and appncauons

Setup menu


Picture setting

Open the home page—“Setting” find the picture setting, you can set up the projection mode, image scaling, aspect ratio,picture mode of the projector.

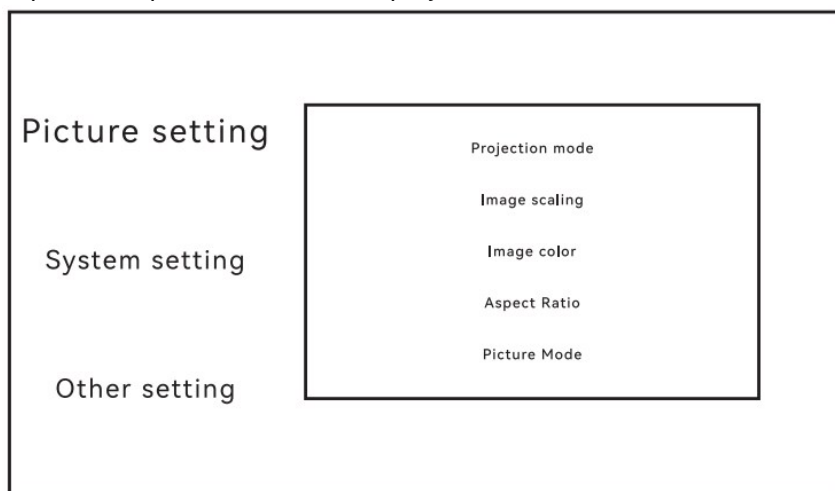


System setting

Open the home page—“Setting” find the system setting, you can set up the OSD language.software update, Tactory restore,auto sleep of the projector.

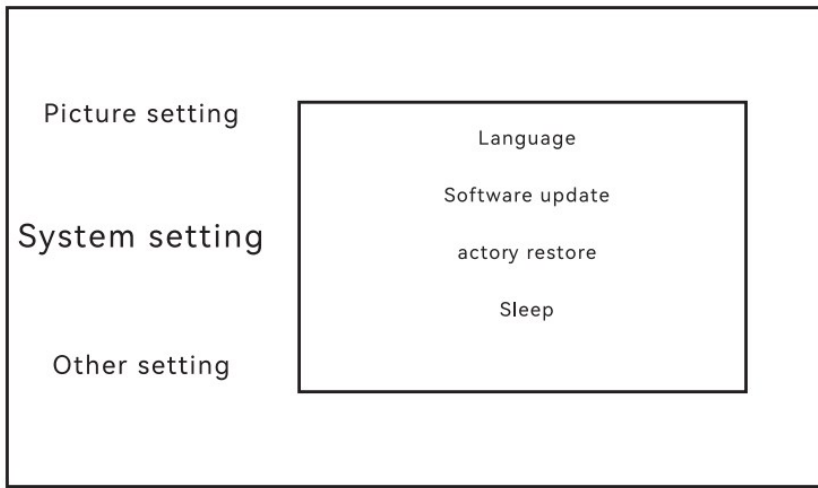


Other settings

Open the home page “Setting’, find the system setting, you can set up the OSD language.

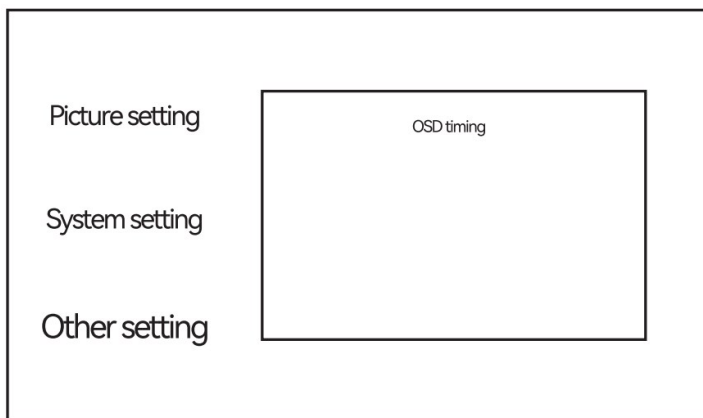


Keystone

In sometimes,the images which projector on the wall is a little twisted as a ladder ,we could take a keystone adjust it.the keystone technology is the methad to get the image normalization by digital or optical technology.

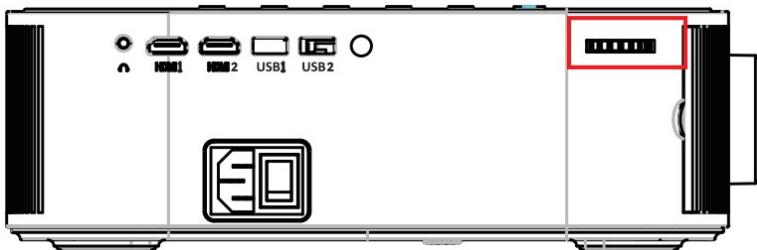

Adjust the focal length

After the projection image is well adjusted, press the press-key”(D) (€) “, or Select “Setting-Focusing” in the selecting menu to find the focusing interface, and adjust the image clarity through the press-key (%) (¢) @@ or the press-key”Left and Right”

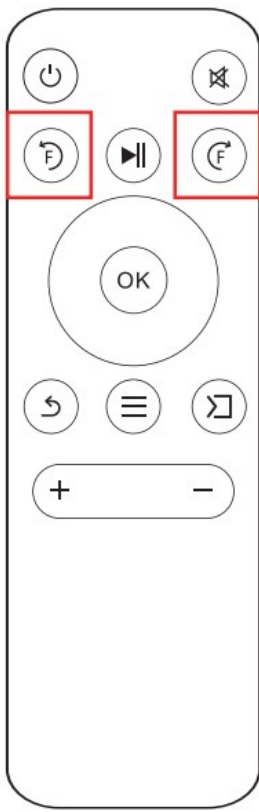



Safety notice

1. Please read Manual carefully before you use the projector.
2. To ensure stable power supply, please use national standard power cable and power cord with grounding.
3. Please use the power type marked on the projector or the power cord provided for power supply.
4. Please do not disassemble the machine yourself, otherwise the company will not undertake free warranty service.
5. Do not look directly at the projector lens while the machine is working to avoid damage your eyes.
6. To prevent clogging the projector vents, do not cover it with cloth, carpet or other materials.
7. This projector does not have waterproof function, please keep it away from rain, moisture and other items containing liquid such as vase, cup, etc.
8. To avoid electric please keep the projector away from rain or water or moisture.
9. And cut off the power supply if do not use this project for along tim:
10. Use the originally foam or other unit-shock material to protect projector, if you need transport this projector.
11. if you find the projector have problems, please contact with the supplier, do not repair by yourself.
12. To extend the projector life span and protect your eyesight, we suggest you may have a break after 3-4 hours using.


Maintain Indication:

1-year warranty from factory, for more warranty information, please contact with supplier (warranty service is not including the frame, manual, package, and some subjective idea about the video, sound, image aspects).

Interface introduction

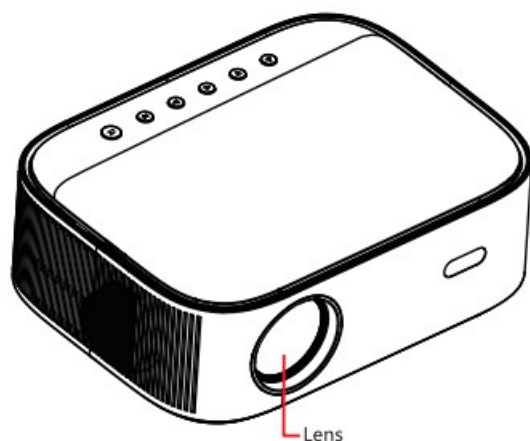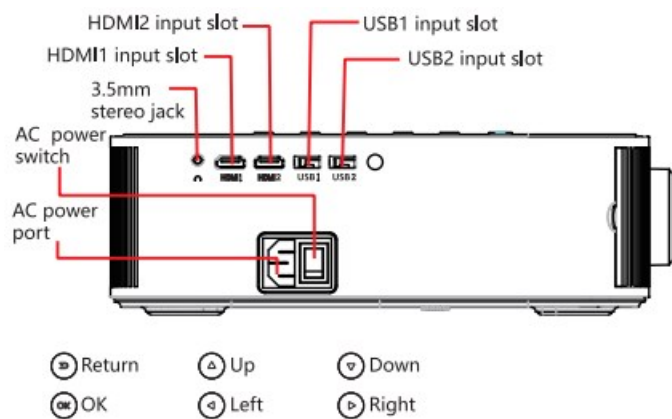

Remote control introduction

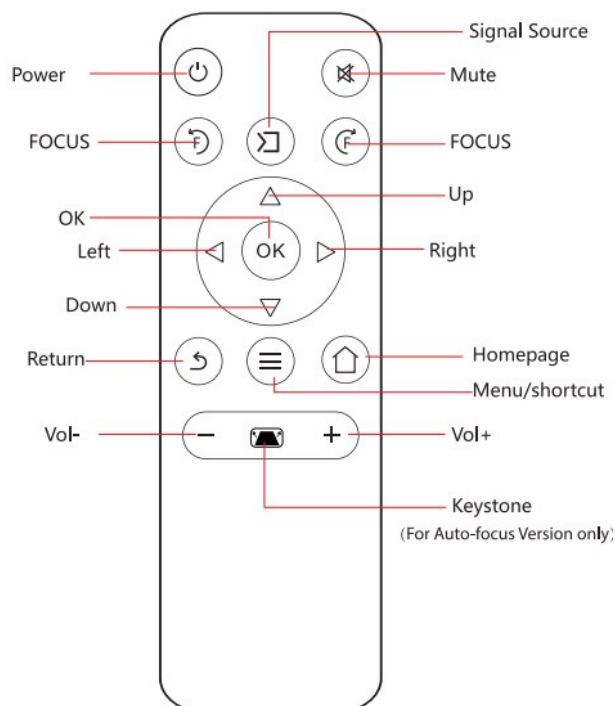



NOTE:

1. To avoid power shortage, please do not mixed use the old and new battery.
2. To avoid battery leakage corrosion, if do not use remote control for a long time, please take the battery out.
3. When using the remote control please align the remote control signal transmitter to the projector' infrared signal reception window.

Multimedia connection



USB input slot connection

Connect the USB drive with the content to the projector USB port, select "Fi photo, text on the list.

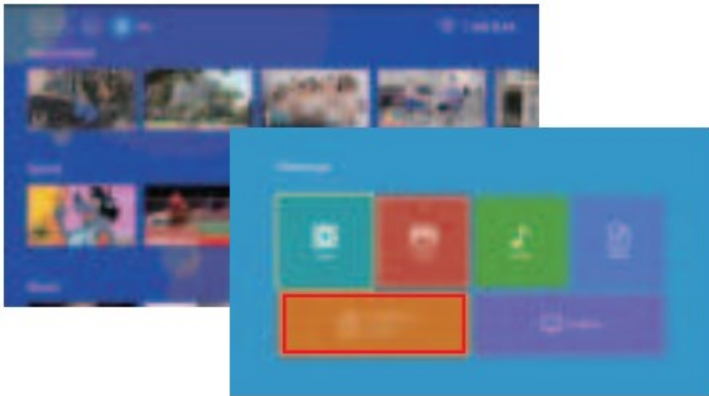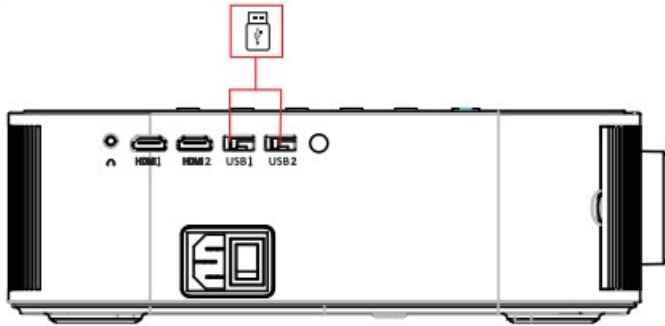


HDMI equipment connection

HDMI slot could connect to computer and all the device with HDMI slot. As connected, choose the source HDMI.

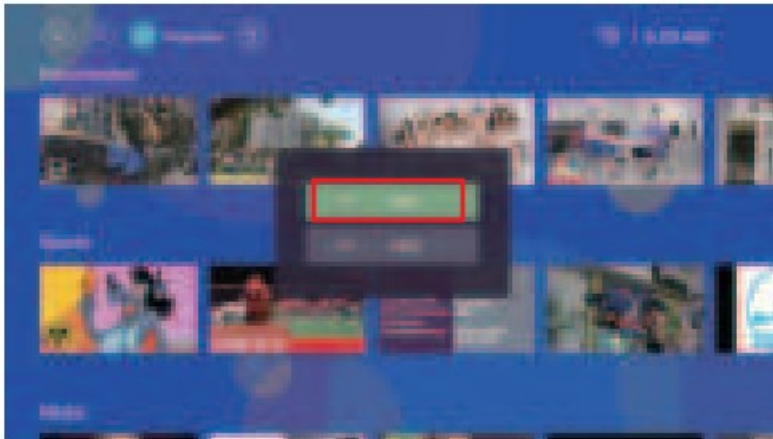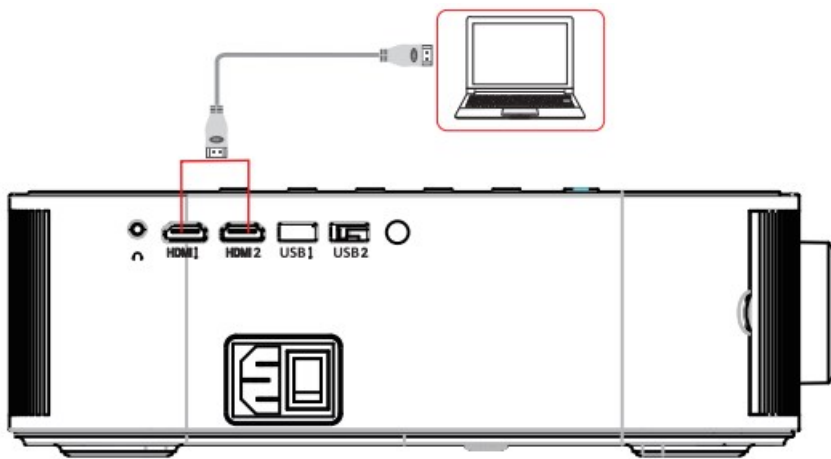


3.5mm audio device connect

Could connect 3.5mm earphone and speaker equipment.

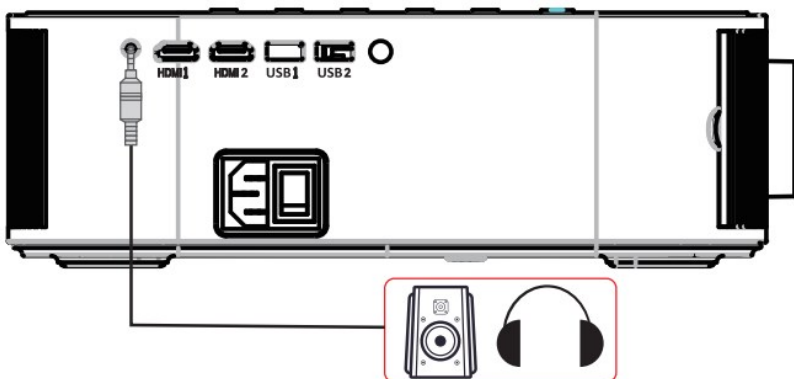

Projector connection introduction


Connection introduction

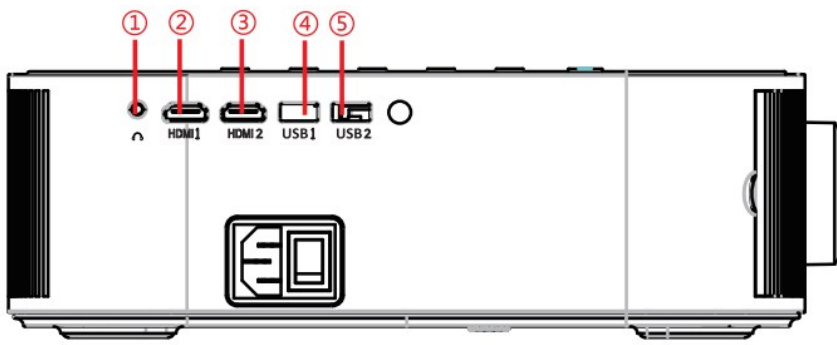

connect multi-device and apphcanons

Search page

In this page, you can search freely and get what you are interested.

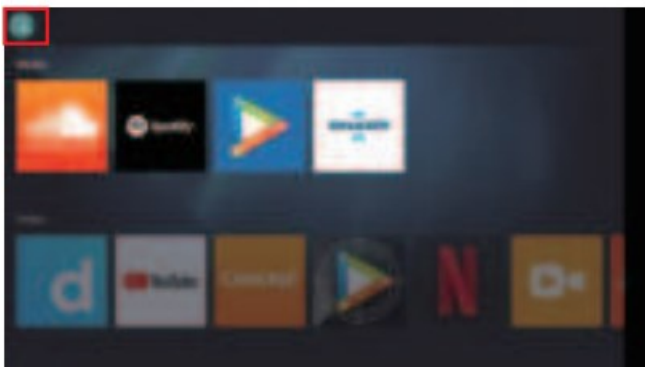

Menu setup

1n the homepage, select setting, you can find network setting, Bluetooth setting, projection image setting,

language setting, date setting, application setting, system update, other setting



Projection setup. (For Auto Focus version.) Open the homepage, click the button Projection to go into setting page. Select projection mode (Front-desktop, Front-ceiling, Rear-desktop, Rear-ceiling) Select automatic keystone to turn it on or turn it off.

Select manual keystone to set keystone correction manually. Select automatic focus to turn it on or turn it off. Select manual focus to set focus manually. Select digital zoom to set projection image zooming (60%-100%). Select correction settings to set auto focus and auto keystone correction.





Correction settings (For Auto Focus version.) Open the homepage, click the button Projection, then select correction settings to reset trapezoidal correction, turn on or turn off auto keystone correction and auto focus when you power on the projector everytime.



My application

Application page

In the homepage, you can have your personal subscription, such as sports, games, music and so on. Delete

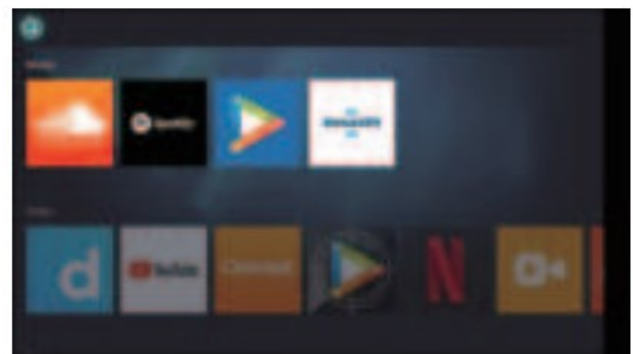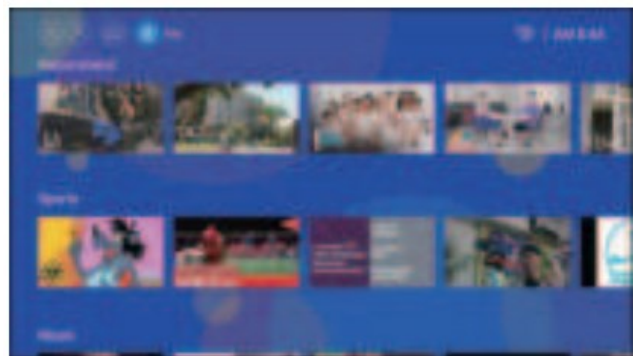

applications you are not interested by long “=” button.

Ectical Focusiong & Manual Focusing

For without Auto Focus version.

After the projection image is well adjusted, press the presskey * D * ¢ @ ”




Technology Features

Basic parameters


Imaging technology	TFT LCD
Resolution	19201080
Maximum compaiole resolution	19201080
Light	LED
Projection distance	1.2-655M
Sereen size	38-2300nches
Aspect radio	169 and 43
Power input	100-240V-50/6042

Projector distance & size

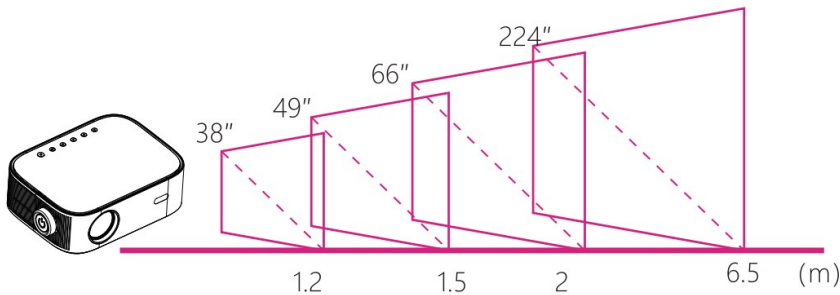

BYINTEK

Documents / Resources

	<p>BYINTEK K45 Series LCD Smart Android Projector [pdf] User Manual</p> <p>K45 Series LCD Smart Android Projector, K45 Series, LCD Smart Android Projector, Smart And roid Projector, Android Projector, Projector</p>
---	--

[Manuals+](#).