



# CARY AUDIO DMS-800 Network Audio Player User Guide

[Home](#) » [CARY AUDIO](#) » CARY AUDIO DMS-800 Network Audio Player User Guide 

## Contents

- [1 CARY AUDIO DMS-800 Network Audio Playe](#)
- [2 WI-FI SETUP](#)
- [3 WIRED SETUP \(ETHERNET\)](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)



## CARY AUDIO DMS-800 Network Audio Playe



First decide how you want to connect the DMS to your Router. Choose either Wi-Fi (two methods) or Ethernet, but DO NOT connect both ways. Delete all previous Cary streaming apps from your phone/tablet. Download the Cary Audio Streamer 2.0 app, but do not have it opened. Additionally, it must be completely closed out and not running in the background.


IF YOU ARE CONNECTING THE DMS WITH WI-FI, DO NOT CONNECT AN ETHERNET CABLE.

## WI-FI SETUP

1. Screw the two Wi-Fi and Bluetooth antennas onto the rear of the DMS.
2. Place the DMS in its location and connect either the XLR or RCA outputs to your preamp, integrated amp, or amplifier.
3. Connect the AC power cord and plug it into the AC outlet.
4. Wait 30 seconds and turn on the DMS. Allow it to fully boot up.

#### **METHOD A – Wi-Fi setup using Cary Streamer 2.0 App.**

1. Use the IR handheld remote to select “Connect to Wi-Fi with App” or wait 30 seconds for the DMS Hotspot to automatically open. If this screen does not appear, press Network input on the IR remote.

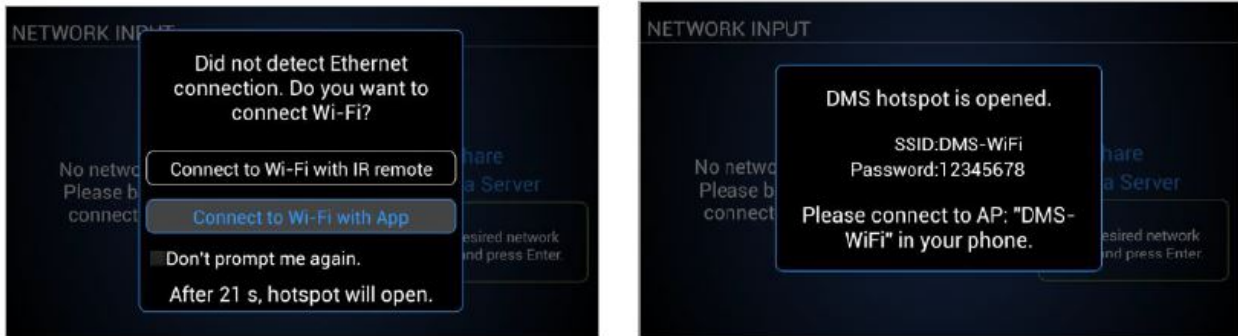

2. Open your phone/tablet WIFI setup Menu and connect to DMS WiFi hotspot.
3. Once phone/tablet is connected to DMS WiFi hotspot, go back to the Cary Audio Streamer 2.0 app and follow the prompts to setup a new DMS. BE SURE TO ALLOW LOCATION SERVICES AND FILE ACCESS WHEN APP PROMPTS.
4. Once the DMS has successfully connected to your home Wi-Fi network, make sure your phone is also set back to your home Wi-Fi network, and not DMS Wi-Fi.

#### **METHOD B – WiFi setup using IR remote control.**

1. Using IR remote control, select “Connect to Wi-Fi with IR Remote.” (If this screen does not appear, press Network input on the IR remote).
2. A prompt will appear confirming you wish to search and setup a Wi-Fi Connection. Select YES.
3. Select your Wi-Fi network and press Enter.
4. Using the alphanumeric keys on the hand-held IR remote, enter your Security Key, and select Connect




## WIRED SETUP (ETHERNET)

**IF YOU ARE CONNECTING THE DMS WITH WIRED ETHERNET, DO NOT CONNECT THE TWO WI-FI ANTENNAS.**

1. Place the DMS within a cable run of your router.
2. Connect an Ethernet cable to the back of the DMS and plug the other end into your router (or Network/Ethernet Switch).
3. Connect the AC power cord and plug it into the AC outlet.
4. Wait 30 seconds and turn on the DMS. Allow it to fully boot up.

**Note:** If the connection is not automatically established, Press **Menu** on the IR remote and navigate to Network Settings and select **Wired** and **DHCP** (for automatic configuration) and press **Connect**.

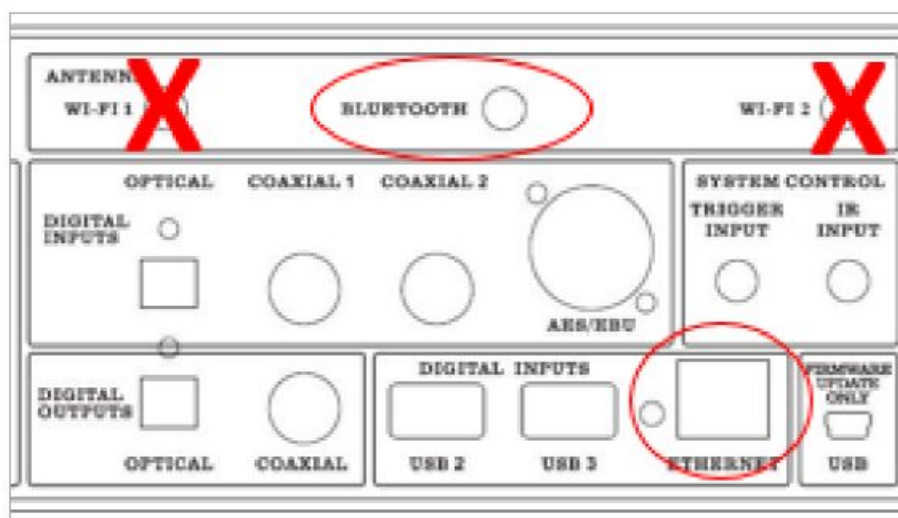

Once the DMS has established a network connection, it will default to the USB input. The DMS is now ready to enjoy. Just select whichever input source you wish to listen to i.e.; Network Servers/PCs, Internet Music Services, USB & SD Card.



#### NOTE:


The DMS default volume is set to -30. If connected directly to an amplifier, slowly increase volume to an acceptable level. If connected to a preamplifier, integrated amplifier, or receiver (something with a volume control), set the DMS volume anywhere from 0.0 to +8.0 and leave it. However, it is recommended to set it to +8.0 for Pure Audio Mode (assuming your input component can handle a 3.0 volt input) for best sound quality. Subsequent volume control should be done by the preamplifier, integrated amplifier, or receiver.

To get the most out of your DMS it is HIGHLY recommended to download the full manual at [www.caryaudio.com](http://www.caryaudio.com). Without doing so, you will not fully understand all the settings and operational procedures which could lead to misuse and potential damage to other components as it relates to volume and voltage output control.

Enjoy,

The Cary Audio Team

#### Documents / Resources

	<p><b><a href="#">CARY AUDIO DMS-800 Network Audio Player</a></b> [pdf] User Guide DMS-650, DMS-700, DMS-800, DMS-800 Network Audio Player, Network Audio Player, Audio Player</p>
---	--