



# CHAUVET PROFESSIONAL ONAIRPRODUCER Customize and Operate Seamlessly User Guide

[Home](#) » [Chauvet Professional](#) » CHAUVET PROFESSIONAL ONAIRPRODUCER Customize and Operate Seamlessly User Guide 


CHAUVET PROFESSIONAL ONAIRPRODUCER Customize and  
Operate Seamlessly User Guide

# ***ONAir***

## **PRODUCER**

### **Quick Reference Guide**

English

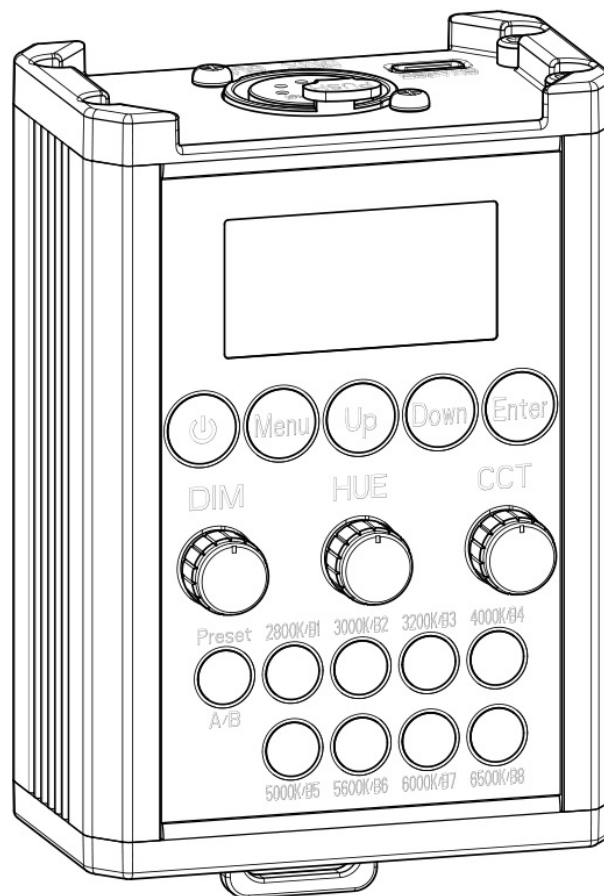

Model ID: ONAIRPRODUCER



The onAir Producer Quick Reference Guide (QRG) has basic product information such as mounting and menu options.

Download the User Manual from [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for more details.

## Disclaimer

The information and specifications contained in this QRG are subject to change without notice.

## LIMITED WARRANTY

**FOR WARRANTY REGISTRATION AND COMPLETE TERMS AND CONDITIONS PLEASE VISIT OUR WEBSITE. For Customers in the United States and Mexico: [www.chauvetlighting.com/warranty-registration](http://www.chauvetlighting.com/warranty-registration).**

**For Customers in the United Kingdom, Republic of Ireland, Belgium, the Netherlands, Luxembourg, France, and**

**Germany: [www.chauvetlighting.eu/warranty-registration](http://www.chauvetlighting.eu/warranty-registration).**

Chauvet warrants that this product shall be free from defects in material and workmanship under normal use, for the period specified in, and subject to the exclusions and limitations set forth in the full limited warranty on our website. This warranty extends only to the original purchaser of the product and is not transferable. To exercise rights under this warranty, you must provide proof of purchase in the form of an original sales receipt from an authorized dealer that shows the product name and date of purchase. THERE ARE NO OTHER EXPRESS OR IMPLIED WARRANTIES. This warranty gives you specific legal rights. You may also have other rights that vary from state to state and country to country. This warranty is valid only in the United States, United Kingdom, Republic of Ireland, Belgium, the Netherlands, Luxembourg, France, Germany and Mexico. For warranty terms in other countries, please consult your local distributor.

## Safety Notes

These Safety Notes include important information about installation, use, and maintenance.

- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.
- The product is intended for professional use only.
- DO NOT open this product. It contains no user-serviceable parts.
- CAUTION: When transferring product from extreme temperature environments, (e.g. cold truck to warm humid ballroom) condensation may form on the internal electronics of the product. To avoid causing a failure, allow product to fully acclimate to the surrounding environment before connecting it to power.
- DO NOT install this product outdoors or in any location where dust, excessive heat, water, or humidity may affect it (IP20).
- DO NOT operate this product if the housing or cables appear damaged.
- In the event of a serious operating problem, stop using immediately.
- The maximum ambient temperature is 113 °F (45 °C). Do not operate this product at higher temperatures.
- The minimum startup temperature is -4°F (-20°C). Do not start the product at lower temperatures.
- The minimum ambient temperature is -22°F (-30°C). Do not operate the product at lower temperatures.

## FCC Compliance

This device complies with Part 15 Part B of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **RF Exposure Warning for North America, and Australia**

**Warning!** This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

## **Contact**

Outside the U.S., U.K., Ireland, Benelux, France, Germany, or Mexico, contact your distributor to request support or return a product. Refer to Contact Us at the end of this QRG for contact information.

## **What is Included**

- onAir Producer
- USB C charging cable
- Quick Reference Guide

## **DC Power**

This product has a 3.7 V, 1,200 mAh lithium ion battery which can be charged by any standard 5V power adapter via the included USB C charging cable.

## **Battery Charge Notes**

This product is equipped with a built-in rechargeable lithium ion battery.

- Avoid depleting the battery below 10%.
- For best results, charge the battery in a temperature between 32 °F (0 °C) and 95 °F (35 °C).
- When charging the battery, keep the product at least 1 m away from any open flame or hot plate.
- If the battery is completely discharged, the device cannot be turned on immediately when the charger is connected. Allow a depleted battery to charge for a few minutes before turning on the device.
- While charging, the device may heat up. This is normal and should not affect the device's lifespan or performance.

If the battery gets hotter than usual, the charger may stop charging.

- Do not place the product in a closed container when charging the battery.
- Do not charge the battery for more than 24 hours.

## **Storage Notes**

- Recharge the battery to full capacity before storing the product.
- Store charged product(s) in a dry environment, away from direct sunlight.

## RDM (Remote Device Management)


Remote Device Management, or RDM, is a standard for allowing DMX-enabled devices to communicate bi-directionally along existing DMX cabling. The onAir Producer uses RDM to make changes to the menu map options of the connected onAir products. Download the User Manual from [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for more details.

## Mounting


The onAir Producer is designed for handheld or tabletop use. It features a loop to which a lanyard or carabiner may be attached for your convenience.

### Mounting Diagram

**Secure a lanyard or carabiner using the loop on the bottom of the product**

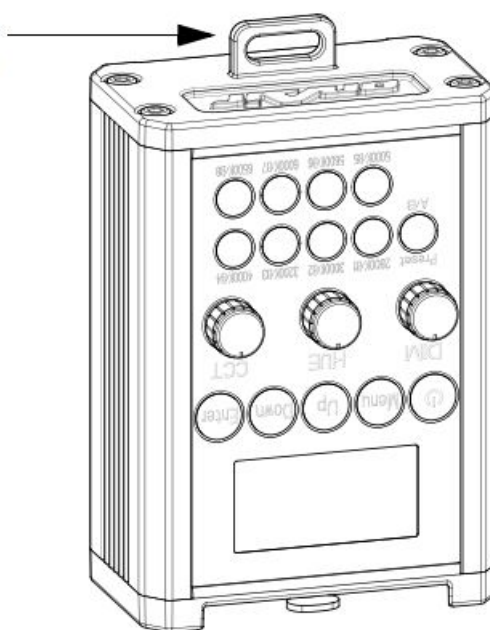

## Control Panel Description

Button/Knob	Function
	Press and hold for 1-3 seconds to turn the onAir Producer on or off
<Menu>	Exits from the current menu or function. Hold for 3 seconds to return to the main menu.
<Up>	Navigates upwards through the menu list or increases the numeric value when in a function
<Down>	Navigates downwards through the menu list or decreases the numeric value when in a function
<Enter>	Enables the currently displayed menu or sets the currently selected value into the selected function
<DIM>	Increases or decreases the dimmer value (CCT mode) or the intensity (HSV mode) of the selected product
<HUE>	Increases or decreases the hue value of the selected product
<CCT>	Increases or decreases the color temperature (CCT mode) or the saturation (HSV mode) of the selected product
<PRESET A/B>	Toggles between the A presets (built-in) and the B presets (custom) of the selected product
<2800K/B1>	Selects the 2800K preset or the look saved to B1. Hold for 3 seconds to save the current look to B1.
<3000K/B2>	Selects the 3000K preset or the look saved to B2. Hold for 3 seconds to save the current look to B2.
<3200K/B3>	Selects the 3200K preset or the look saved to B3. Hold for 3 seconds to save the current look to B3.
<4000K/B4>	Selects the 4000K preset or the look saved to B4. Hold for 3 seconds to save the current look to B4.
<5000K/B5>	Selects the 5000K preset or the look saved to B5. Hold for 3 seconds to save the current look to B5.
<5600K/B6>	Selects the 5600K preset or the look saved to B6. Hold for 3 seconds to save the current look to B6.
<6000K/B7>	Selects the 6000K preset or the look saved to B7. Hold for 3 seconds to save the current look to B7.
<6500K/B8>	Selects the 6500K preset or the look saved to B8. Hold for 3 seconds to save the current look to B8.

## Menu Map

Refer to the onAir Producer product page on [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for the latest menu map.

Main Level	Programming Levels		Description
Setup Fixture	____ (Device Label [Discovery])	---	Selects a connected product and mirrors that product's display for control with the buttons and knobs of the onAir Producer. Press and hold <b>&lt;MENU&gt;</b> for 3 seconds to return to the onAir Producer main menu.
	____ (Device Label [Discovery])	---	
	____ (Device Label [Discovery])	---	
	... ..	---	
	____ (Device Label [Discovery])	---	
Power Options	Off		The product stays on until manually turned off
	1 Minute		Selects the duration of inactivity before the product automatically powers itself off
	5 Minute		
	10 Minute		
Information	System:	V_-----	Displays the current firmware version
	UID:	21A40769----	Displays the product UID
	Battery:	--%	Displays the current battery charge level
(Hold <PRESET A/B> for 2 seconds)	Copy Presets	Fail or Success	Copies presets from connected product (only use when 1 product is connected)
	Send Presets		Sends copied presets to connected product (only use when 1 product is connected)
		Back	



Using the Copy Presets and Send Presets function with more than 1 onAir product connected will cause undesired errors in the connected products.

## Contact Us



General Information	Technical Support
<b>Chauvet World Headquarters</b>	
Address: 5200 NW 108th Ave. Sunrise, FL 33351 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: <a href="mailto:chauvetcs@chauvetlighting.com">chauvetcs@chauvetlighting.com</a> Website: <a href="http://www.chauvetprofessional.com">www.chauvetprofessional.com</a>
<b>Chauvet Europe Ltd.</b>	
Address: Unit 1C Brookhill Road Industrial Estate Pinxton, Nottingham, UK NG16 6NT Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: <a href="mailto:UKtech@chauvetlighting.eu">UKtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Europe BVBA</b>	
Address: Stokstraat 18 9770 Kruishoutem Belgium Voice: +32 9 388 93 97	Email: <a href="mailto:BNLtech@chauvetlighting.eu">BNLtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet France</b>	
Address: 3, Rue Ampère 91380 Chilly-Mazarin France Voice: +33 1 78 85 33 59	Email: <a href="mailto:FRtech@chauvetlighting.fr">FRtech@chauvetlighting.fr</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Germany</b>	
Address: Bruno-Bürgel-Str. 11 28759 Bremen Germany Voice: +49 421 62 60 20	Email: <a href="mailto:DEtech@chauvetlighting.de">DEtech@chauvetlighting.de</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Mexico</b>	
Address: Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: <a href="mailto:servicio@chauvet.com.mx">servicio@chauvet.com.mx</a> Website: <a href="http://www.chauvetprofessional.mx">www.chauvetprofessional.mx</a>

[chauvetcs@chauvetlighting.com](mailto:chauvetcs@chauvetlighting.com)  
[www.chauvetprofessional.com](http://www.chauvetprofessional.com)  
[UKtech@chauvetlighting.eu](mailto:UKtech@chauvetlighting.eu)  
[www.chauvetprofessional.eu](http://www.chauvetprofessional.eu)  
[BNLtech@chauvetlighting.eu](mailto:BNLtech@chauvetlighting.eu)  
[FRtech@chauvetlighting.fr](mailto:FRtech@chauvetlighting.fr)  
[DEtech@chauvetlighting.de](mailto:DEtech@chauvetlighting.de)  
[servicio@chauvet.com.mx](mailto:servicio@chauvet.com.mx)  
[www.chauvetprofessional.mx](http://www.chauvetprofessional.mx)

the U.S., U. K., Ireland, Mexico, France, Germany, or Benelux, contact the dealer of record.




onAir Producer QRG Rev. 1

- Contents
- 1 Documents / Resources

2 Related Posts

Documents / Resources

	<p><a href="#">CHAUVET PROFESSIONAL ONAIRPRODUCER Customize and Operate Seamlessly</a> [pdf]</p> <p>User Guide</p> <p>ONAIRPRODUCER, Customize and Operate Seamlessly, Operate Seamlessly, ONAIRPRODUCER, Seamlessly</p>
---	--