



CREATIVE STAGE V2 MF8375 2.1 Soundbar with Clear Dialog and Surround Audio Processing User Guide

[Home](#) » [Creative](#) » CREATIVE STAGE V2 MF8375 2.1 Soundbar with Clear Dialog and Surround Audio Processing User Guide 


CREATIVE STAGE V2 MF8375 2.1 Soundbar with Clear Dialog and Surround Audio Processing




Contents

- 1 Overview
- 2 IR Remote Control
- 3 Source Selection and Display
- 4 Bluetooth Mode / Power-saving Mode
- 5 TV (ARC) / Optical / AUX Connectivity
- 6 Wall Mount
- 7 Technical Specification
- 8 Other Information
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

Overview

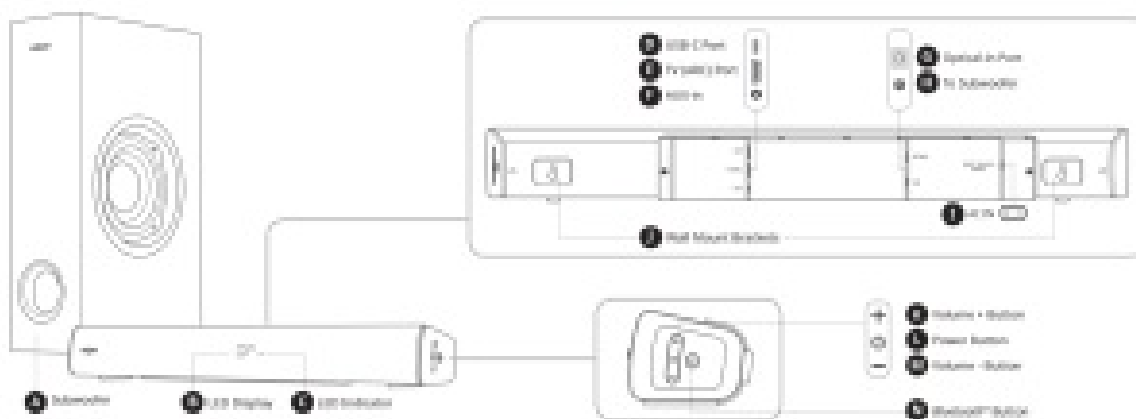

IR Remote Control

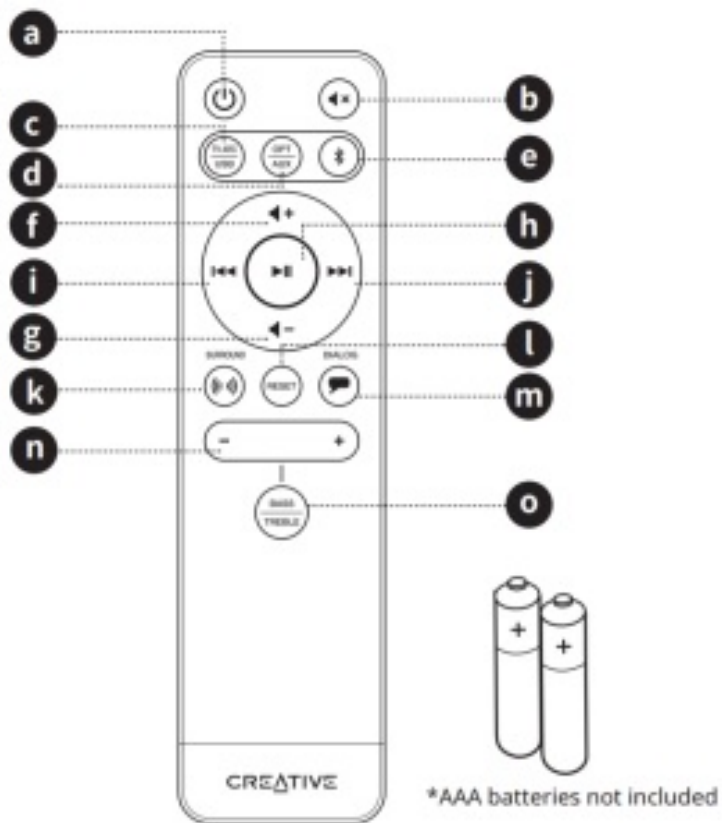

a Power Button

Press and hold 2s to power off soundbar

b Mute Button

Press once to mute volume

Press once again to unmute volume

c TV (ARC) Source Button

Press once to toggle to TV (ARC)-out source

Press once again to toggle to USB-out source

d OPT Source Button

Press once to toggle to Optical-out source

Press once again to toggle to AUX-out source

e Bluetooth Source Button

Press once to enter Bluetooth Mode

Press and hold for 2s to enter Bluetooth Pairing mode

f Volume + Button

Press to increase volume

g Volume - Button

Press to decrease volume

h Play / Pause Button

Press once to play

Press once again to pause

(Applicable in USB and Bluetooth modes only)

i Previous Track Button

Press once to return to previous track

(Applicable in USB and Bluetooth modes only)

j Next Track Button

Press once to skip to next track
(Applicable in USB and Bluetooth modes only)

k Surround Button

Press once to turn on Surround mode
Press once again to turn off Surround mode

l Reset Button

Press to reset all audio settings

m Clear Dialog Button

Press once to turn on Clear Dialog mode
Press once again to turn off Clear Dialog mode

n Bass / Treble – / + Button


Press to increase / decrease Bass / Treble's value

o Bass Treble Button


Press to toggle between Bass and Treble

Source Selection and Display



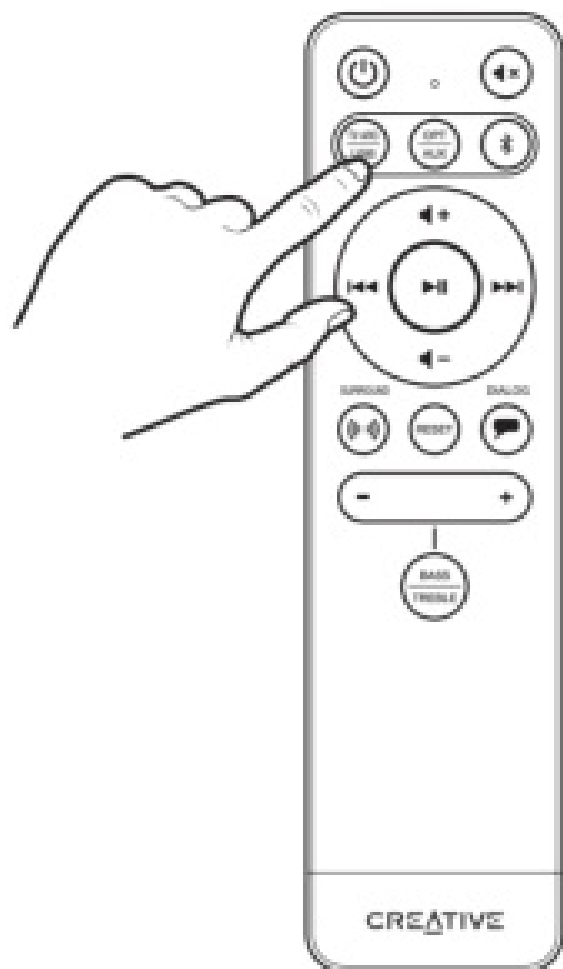

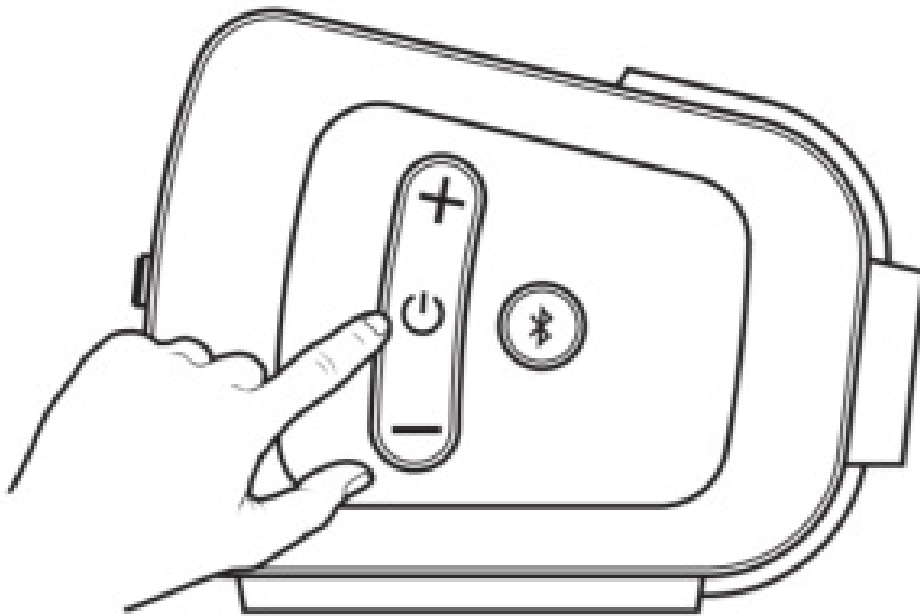


Press the respective buttons on the provided IR remote control to select preferred audio source



Alternatively, press once on the soundbar's power button to cycle through sources: Bluetooth > Optical > TV (ARC) > USB Audio > AUX



	<p>– AUX-in</p>
	<p>– Bluetooth Mode</p>
	<p>– Optical-in</p>
	<p>– TV (ARC) Mode</p>
	<p>– USB Audio Mode</p>

	– Standby
	– Clear Dialog On
	– Clear Dialog Of
	– Surround On
	– Surround Of
	– Bass
	– Treble

Bluetooth Mode / Power-saving Mode



Bluetooth Pairing Mode

Press and hold the Bluetooth button on either the soundbar or IR remote control for 2s to enter Bluetooth Pairing mode.

Built-in LED will start blinking in blue. Select “Stage V2” from the list of discovered Bluetooth devices to pair. Once paired with a device, soundbar’s LED will remain blue in static state.

Creative Stage V2 will automatically connect to last paired device when in Bluetooth mode. To pair to a new device, press and hold 2s to enter Bluetooth Pairing mode again. Press the Bluetooth button once to exit Bluetooth Pairing mode.


Clearing Soundbar’s Bluetooth Memory

In Bluetooth mode, press and hold the Bluetooth button on either the soundbar or IR remote control for 8s to clear all previously paired devices. Soundbar will return to Bluetooth mode once completed.


Power-saving Mode

Creative Stage V2 features a power-saving mode that will power off the soundbar after more than 24 hours of inactivity. To activate / deactivate this feature, press and hold the power button for 10s when the soundbar is powered off.

TV (ARC) / Optical / AUX Connectivity

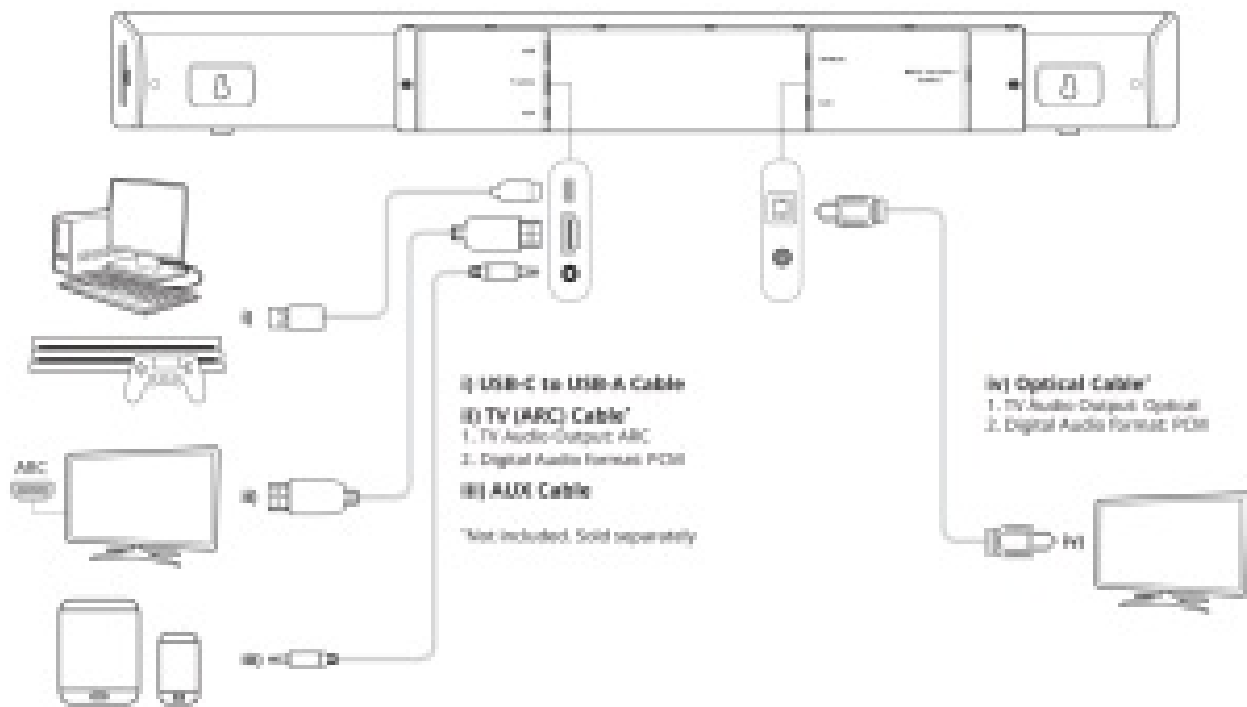

Wall Mount

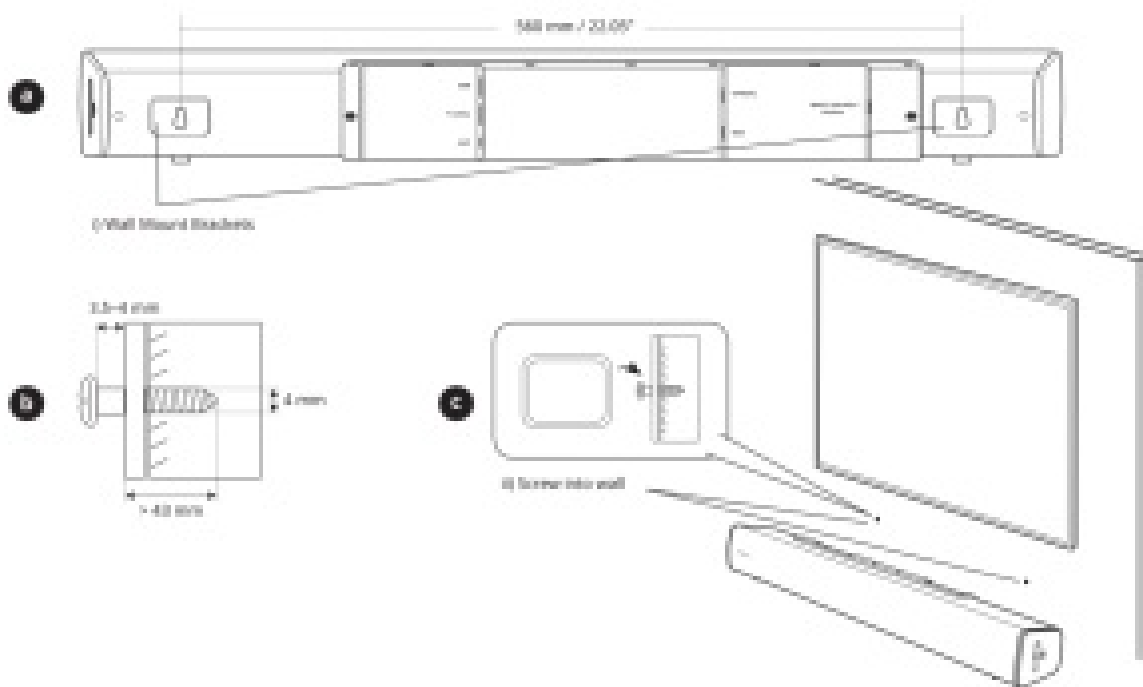

^Screws are optional and not included.

Select corresponding screws that match the dimensions provided in this manual before mounting the soundbar

WARNING

To prevent injury, this apparatus must be securely attached to the wall in accordance with the installation instructions


Technical Specification

Bluetooth Version	Bluetooth 5.0
Operating Frequency	2402–2480 MHz
Operating Range	Up to 10m / 33 ft, measured in open space. Walls and structures may affect range of device
RF Output Power	< 4 dBm
Supported Bluetooth Profiles	A2DP (Wireless Stereo Bluetooth), AVRCP (Bluetooth Remote Control)
Supported Codec	SBC
Input	100–240V 50 / 60 Hz 1.5A
Speaker Power	20W x 2, Satellite, 40W Subwoofer, Peak 160W
Frequency Response	55–20,000 Hz
SNR	≥ 75 dB
Operating Temperature Range	0–45°C

Other Information

Please visit creative.com/compliance/Stagev2 for the user guide, safety and regulatory information, and ErP information where applicable.

Please visit creative.com/support/Stagev2 for all other support related to your product.

	<p>The use of the WEEE Symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help protect the environment. For more detailed information about the recycling of this product, please contact your local authority, your household waste disposal service provider or the shop where you purchase the product.</p>
---	---

Hereby, Creative Labs Pte. Ltd. declares the Bluetooth Speaker, model no. MF8375 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at <http://www.creative.com/EUDoC>.

© 2020 Creative Technology Ltd. All rights reserved. Creative and the Creative logo are trademarks or registered trademarks of Creative Technology Ltd in the United States and/or other countries. The Bluetooth® word mark and logo are owned by the Bluetooth SIG, Inc. and any use of such marks by Creative Technology Ltd is under license. All other trademarks are the property of their respective owners and are hereby recognized as such. All specifications are subject to change without notice. Actual product may differ slightly from images shown. Use of this product is subject to a limited warranty.

CREATIVE®



[CREATIVE STAGE V2 MF8375 2.1 Soundbar with Clear Dialog and Surround Audio Processing](#) [pdf] User Guide
STAGE V2, MF8375, 2.1 Soundbar with Clear Dialog and Surround Audio Processing

References

- [Creative Worldwide Support](#)[Creative Stage V2](#)
- [Creative Technology - Declaration of Conformity](#)
- [Creative Worldwide Support - Creative Stage V2](#)
- [Creative Worldwide Support](#)