



CZUR TouchBoard V2 Wireless Bluetooth Touchpad Keyboard User Manual

[Home](#) » [CZUR](#) » CZUR TouchBoard V2 Wireless Bluetooth Touchpad Keyboard User Manual 

Contents

- 1 CZUR TouchBoard V2 Wireless Bluetooth Touchpad Keyboard
- 2 How to Use the TouchBoard
- 3 Touch Panel / Keyboard
- 4 Volume adjustment
- 5 Auto-focus
- 6 Switch signal source
- 7 Finger touch
- 8 Keyboard
- 9 Touchpad standby and sleep
- 10 Documents / Resources
 - 10.1 References



CZUR TouchBoard V2 Wireless Bluetooth Touchpad Keyboard



How to Use the TouchBoard

- TouchBoard acts as a wireless controller for the StarryHub.
- You can operate StarryHub with the TouchBoard easily.


- Before using the TouchBoard, please turn the power button (on the back of the TouchBoard) to ON status.
- Put the TouchBoard back to the charging dock (on the top of StarryHub) after each use.
- Pair the TouchBoard with the StarryHub
- TouchBoard and the StarryHub are paired by factory default.




If you need to pair them again, please do as following steps


1. Power on StarryHub and the TouchBoard.


Main unit power on

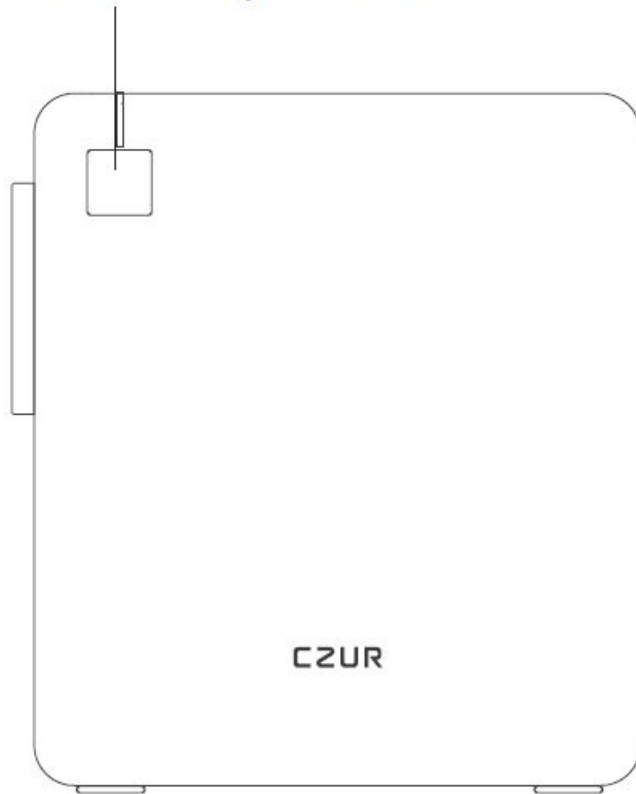


TouchBoard power on

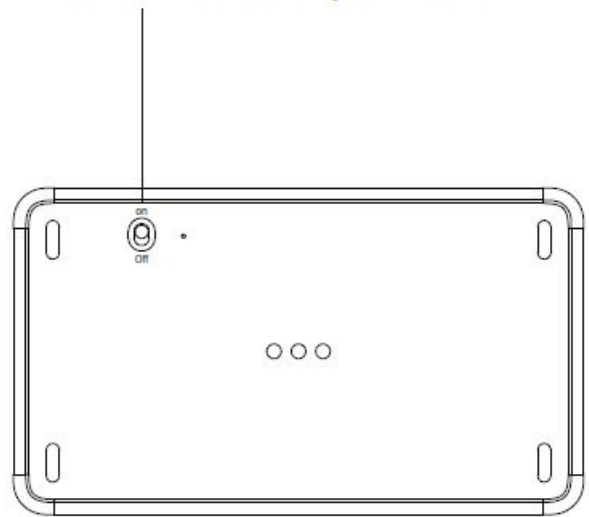

2. Long press  on the upper left corner for 3 seconds until the LED indicator blinks in blue colour.

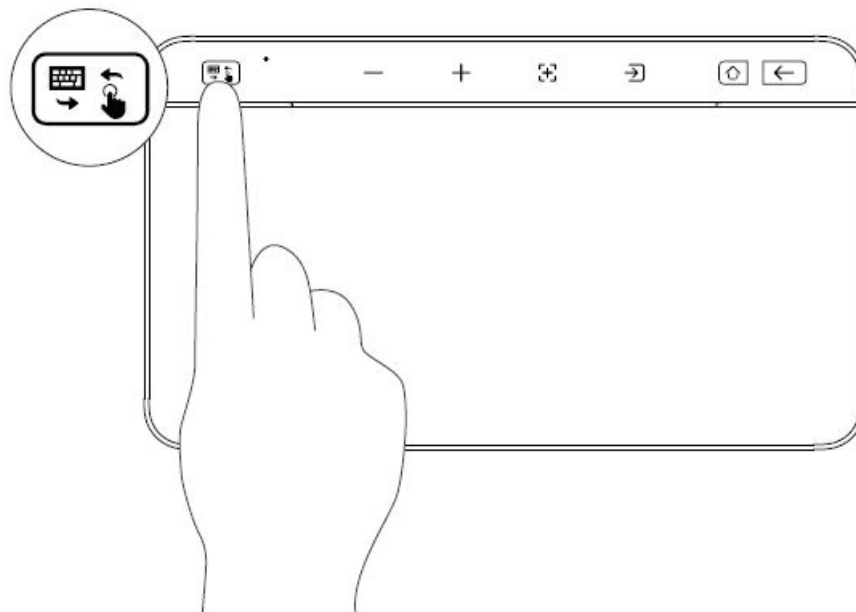


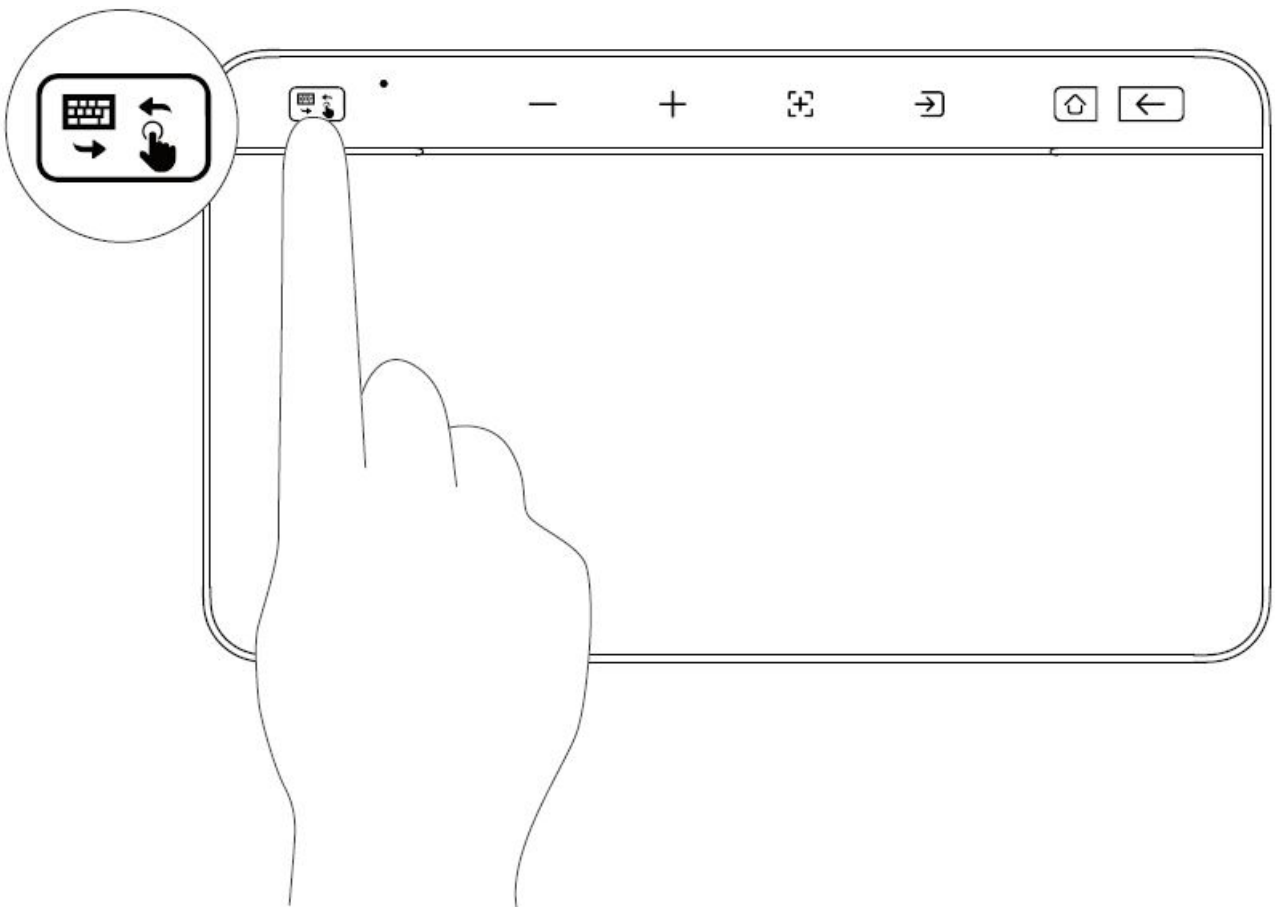
3. Put the TouchBoard back into the charging dock, and wait for 10 seconds until the icons on the first row of the TouchBoard light up. Pairing is completed.

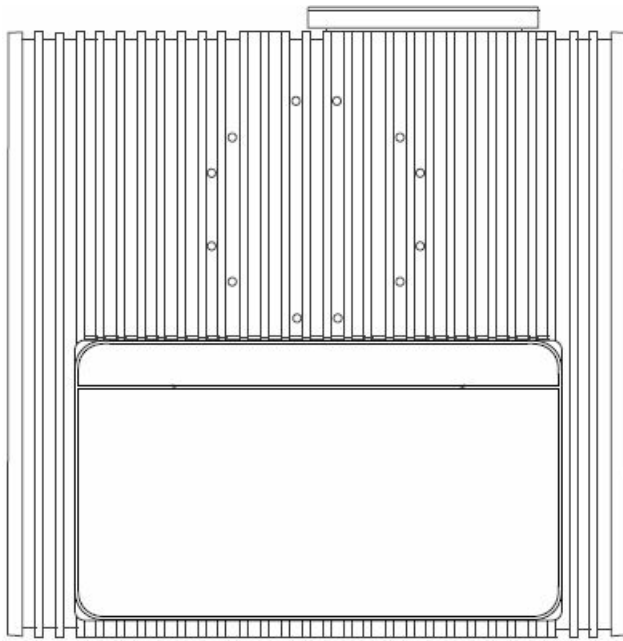

Paired!



Touch Panel / Keyboard

- Tap on  Touch/Board to switch input method (touch panel or keyboard).






Volume adjustment

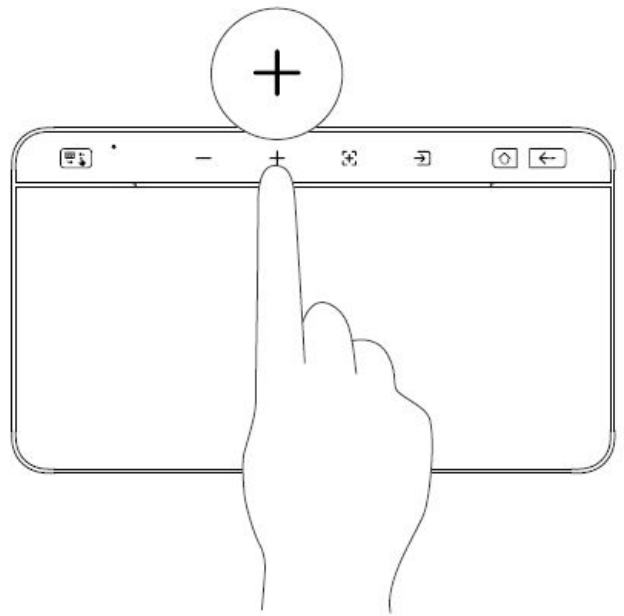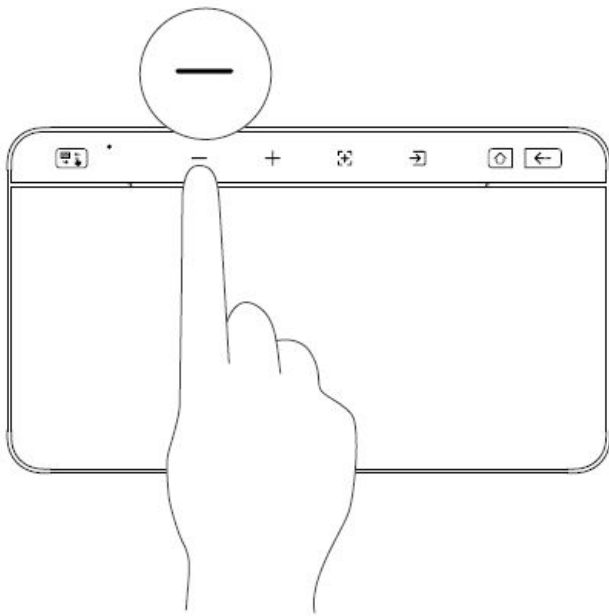- Tap on **V-** **V+** to adjust the volume of the StarryHub.




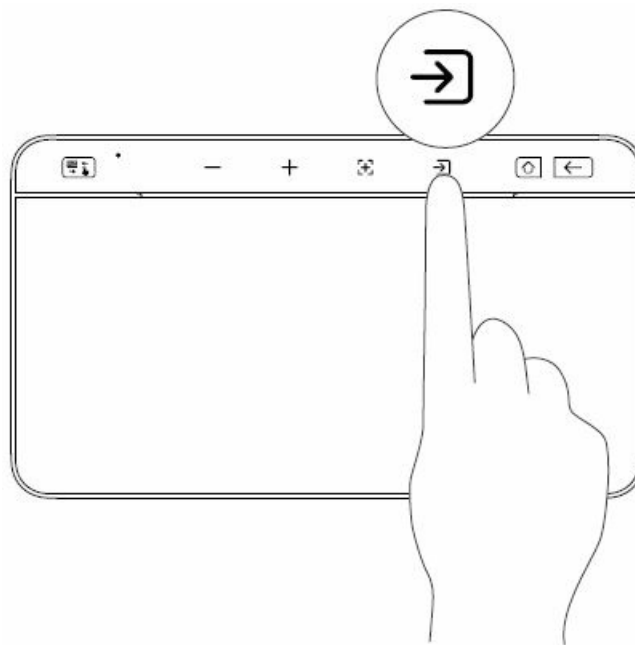
Auto-focus

- Tap on  to focus the projector lens automatically. Long press  to use manual focus.

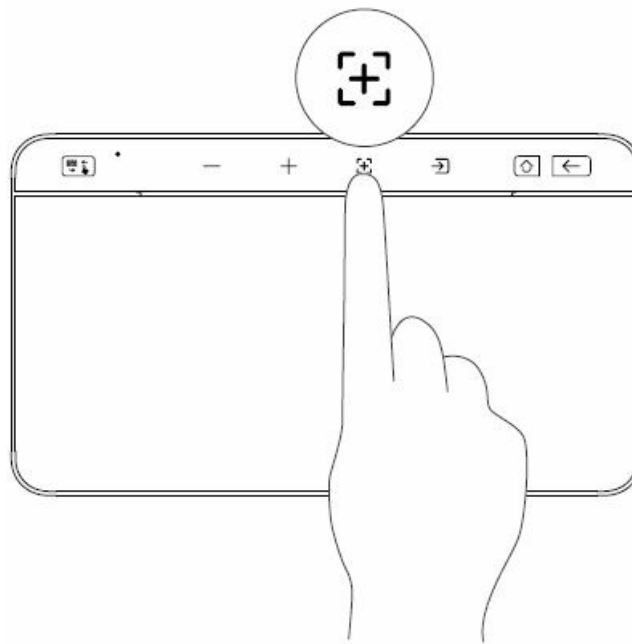




Switch signal source

- Tap on  to switch between Starry OS main system,
- HDMI, and wireless screen projection signal sources.




Home

- Tap on  and back to the home page, and long press  for the APP selector.

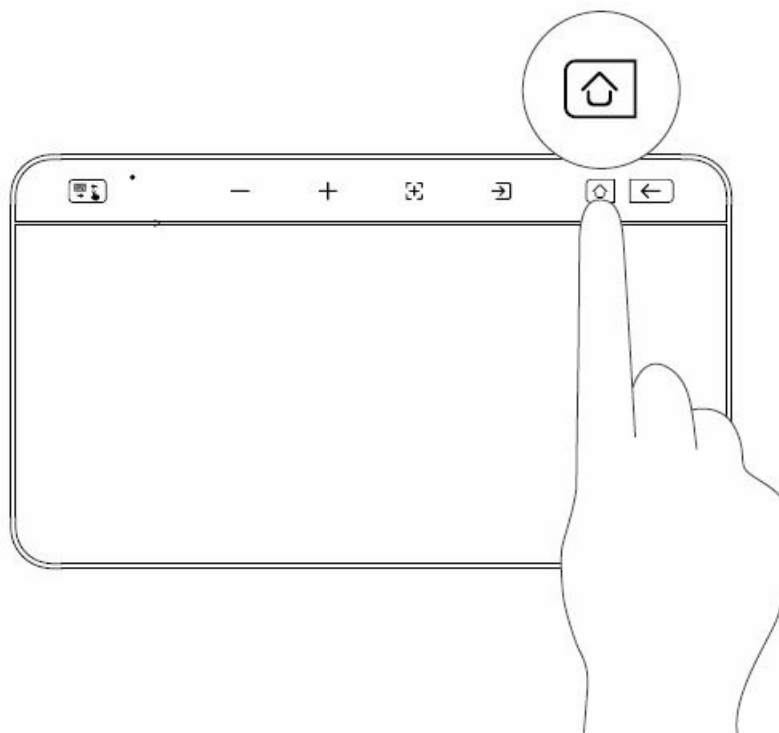

Back

- Tap to get back to the previous page or previous operation.

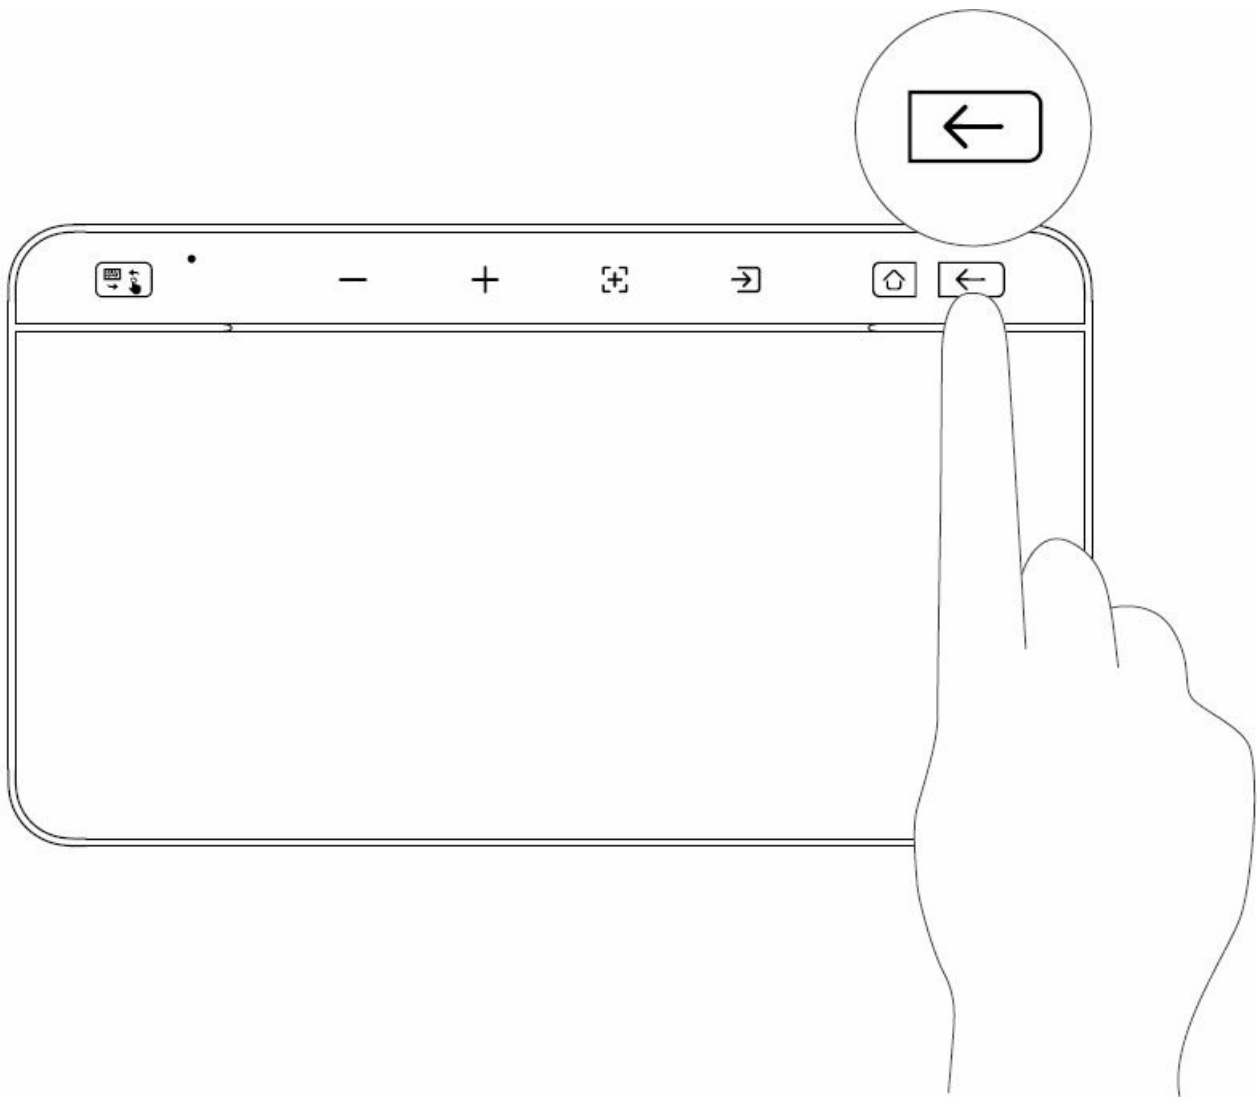

Finger touch



- In Touch mode, regular operations such as “Slide”, “Click/Touch with 1 finger”, “Slide with 2 fingers” and “Zoom in & out with 2 fingers” are supported.
- Slide with ONE finger or Double click with ONE finger and slide: To move object.
- Tab with two fingers Call out more options = right-click on a computer mouse.
- Slide vertically with three fingers: To switch between APPs.
- Slide left/right with three fingers Switch applications.



One finger slide



Slide with two fingers



Tab/Press with one finger




Two fingers open/close



Tab with two fingers



Slide vertically with three fingers




Slide left/right with three fingers




Slide with ONE finger or Double click with ONE finger and slide

- Tab **Shift + Space bar** at the same time to switch keyboard input language.
- **[Fn]**, **[OPT]**, **[CMD]** can work on Windows and MacOS, but are NOT available on StarryOS.

Keyboard



- In Board mode, the keyboard will light up so you can use the TouchBoard as an input method.

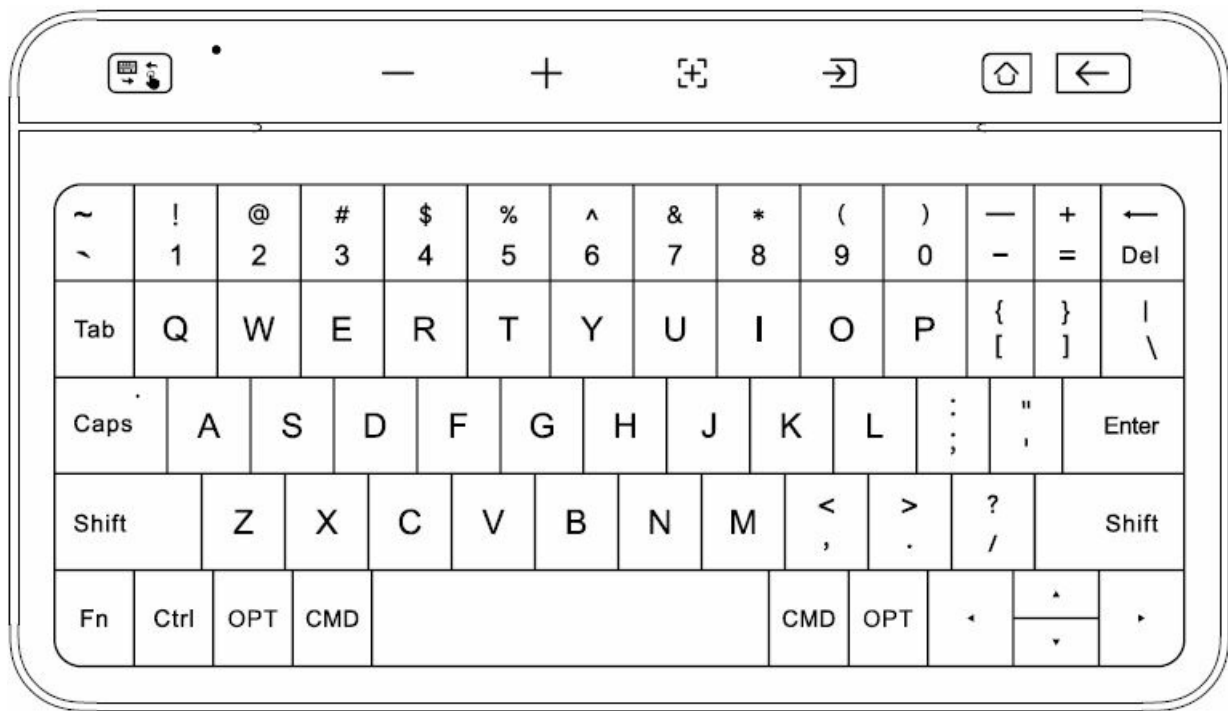

Low Battery Status

- “Low Battery” alert appears with the upper left indicator light flashing red when the Touchboard battery is under 20%. Please put the TouchBoard back into the charging dock (the 3 pins on the top of StarryHub) to recharge.

Touchpad standby and sleep

- **Touchpad standby:** Touch mode has no operation for 1 minute then will enter standby mode automatically. Keyboard mode without operation for 1 minute, will enter touch mode; Touch mode for 1 minute without operation, will enter standby mode.
- **Standby definition:** After entering the standby mode, the power indicator lights up slightly, and the backlight lights in the functional area and keyboard area are off.
- **Touchpad enters standby wake-up mode:** Use any key to wake up the touchpad.
- **Touchpad Sleep:** Bluetooth connected for 24 hours without any operation, will enter sleep mode automatically. Bluetooth is not connected for 30 minutes without any operation and will enter sleep automatically.
- **Sleep definition:** All indicator lights are off, and the device enters deep sleep.
- **The touchpad enters sleep mode, and the wake-up method is:** Place the touchpad in the charging area of the projector, and the touchpad will automatically wake up, or turn off the power switch and then turn it on again.

Documents / Resources

