

DeFengYuan X7 Case Keyboard User Manual

Contents

- 1 Wireless Keyboard User Manual (for iOS)**
 - 1.1 Product Model Specification
 - 1.2 Getting Started Guide
 - 1.3 Bluetooth Keyboard Connection Steps
 - 1.4 Keyboard Shortcut Function Description
 - 1.5 Energy Saving Sleep Mode
 - 1.6 Troubleshooting
 - 1.7 Cleaning
 - 1.8 Charging
 - 1.9 Warranty Card
- 2 Documents / Resources**
 - 2.1 References

Wireless Keyboard User Manual (for iOS)




Package included: Instruction manual ×1 Wireless keyboard ×1 USB charging cable ×1

Product Model Specification

1. Bluetooth Interface Standard
2. Operating Distance Available: 10 meters
3. Modulation System: GFSK

4. Working Current: < 9mA (When the touchpad is working)
5. Standby Current: < 0.3mA
6. Sleeping Current: < 40uA
7. Charging Current: 200mA
8. Standby Time: > 100 days
9. Charging Time: 2-3hours
10. Lithium Battery Capacity 400mAh
11. Working Time: > 50/100 hours (turn off the backlight)
12. Lithium Battery Life: 3 years
13. Key Strength: 80 ±10g
14. Key Life: 5 Million Stroke
15. Operating Temperature: -10°C – +55°C

Getting Started Guide

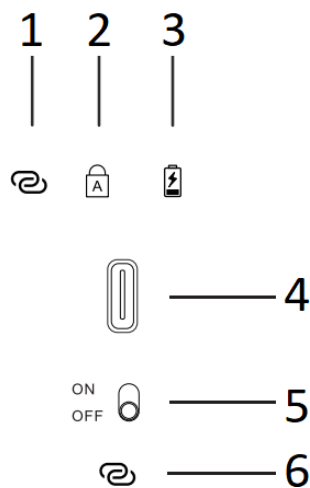


1. Bluetooth/Working Indicator: Slow flash after entering the Bluetooth pairing mode, long turn on when the connection is successful, and turn off after the keyboard sleeps or shuts down
2. Caps Lock Indicator: Lights up when the keyboard is in uppercase input
3. Low Battery Indicator Light: The light will blink when the voltage is lower than 3.3V
Charging Indicator: The light will be on when charging, When fully charged the indicator light is steady to green light
4. USB Type C Charging Dock: When Weak current indicator light flashes, put the original accessories. Plug the USB charging cable into this port for charging, Recommended to use a 5V 1A device to charge it
5. Power Switch
6. Bluetooth pairing key

Bluetooth Keyboard Connection Steps


1. Toggle the switch to ON, the Bluetooth indicator, Caps Lock indicator, and weak power indicator will light up for 3 seconds at the same time, then the keyboard working indicator turn on, manually press “connect” to enter pairing (the Bluetooth indicator flashing slowly)




2. Open and unlock your tablet and click on the “Settings” icon

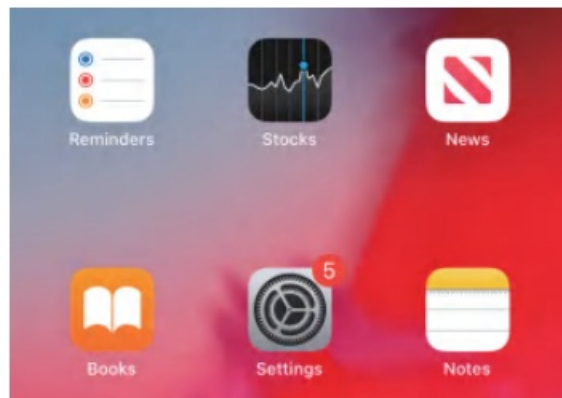

3. In the settings menu, click on the “Bluetooth” menu

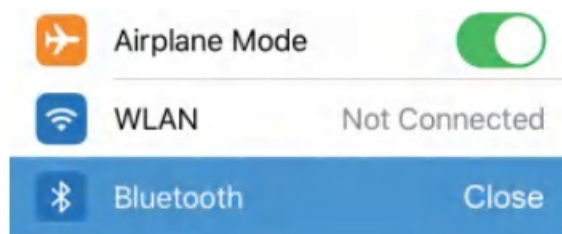

4. Turn on the Bluetooth switch and the tablet will automatically search for Bluetooth keyboard devices

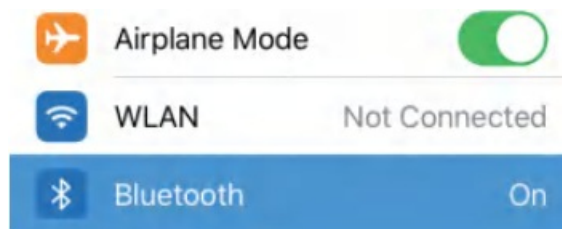



5. Discover the Bluetooth keyboard device: Bluetooth Keyboard, click it and confirm the connection, the Bluetooth keyboard will automatically connect





6. After the Bluetooth connection is successful, the working indicator will turn off, and the device will display “connected” in the Bluetooth device list














Keyboard Shortcut Function Description


	Language switching
	Backlight brightness adjustment

Note (1): This button is only available on the backlit version of the keyboard

 Brightness adjustment:  Key combination, Three brightness cycles in total

Single Finger Opera tion	 <p>Click (Press with one finger until it feels a little pressed)</p>	 <p>Click and hold (Press and hold with one finger)</p>
	 <p>Drag and move (Tap and hold an item, then swipe your finger across the trackpad to move it)</p>	 <p>Wake up iPad (Click the touchpad) Or if you are using an external keyboard, press any key</p>
	 <p>Open dock (Swipe the pointer with one finger from the bottom of the screen)</p>	 <p>Back to home screen (Swipe the pointer with one finger from the bottom of the screen, After the dock appears, swipe the pointer from the bottom of the screen again)</p>
	 <p>Show side dock (Swipe the pointer across the right edge of the screen with one finger. To hide the side dock, swipe right again)</p>	 <p>Open “control center” (Move the pointer with one finger to select the status icon at the top right, and click Or select the status icon in the upper right and swipe up)</p>
	 <p>Open “notification center” (Move the pointer with one finger to select the status icon at the top left, and click ,Or use one finger to move the pointer near the middle of the top of the screen)</p>	





Attention

1. When not use for long time, suggest to close keyboard, in order to prolong battery lift
2. In order to get longer battery lift, charging before keyboard power light flashes, charging time must be better more than 2 hours

Energy Saving Sleep Mode

When keyboard not use will be enter sleep mode after 15 minutes, keyboard indicator will off press any key 3s to wake it up when need use again, then keyboard indicator will turn on

Troubleshooting

1. Make sure the power is turned on
2. Ensure keyboard operable distance
3. Make sure the battery has power
4. Ensure the device's Bluetooth was turned on
5. Ensure the wireless keyboard was connected with the Bluetooth
6. Ensure the wireless keyboard paired successfully

Cleaning

Washing, alcohol or a similar cleaning agent decontamination keyboard



Charging

When battery is low, the power indicator blinking, means need to charge the keyboard

1. Connect Genuine Parts USB cable B port to keyboard cradle
2. Connect USB cable A port to power adapter or computer USB port
3. During charging, the charging indicator will be on, and it will turn green when fully charged

When system is upgraded to iOS10 – iOS12, the CapsLock key on the Bluetooth keyboard will default to the function of switching to the Latin keyboard (the CapsLock key will default to the function of switching language in iOS 13-15), which makes it impossible to switch between upper and lower case. You can do the following settings to restoring normal functionality:

1. First connect the bluetooth
2. Settings -> General -> Hardware keyboard
3. After clicking in, you will see "Caps Lock Latin Switch", (iOS 13-15 CapsLock key will default to switch language function) is on, just turn it off

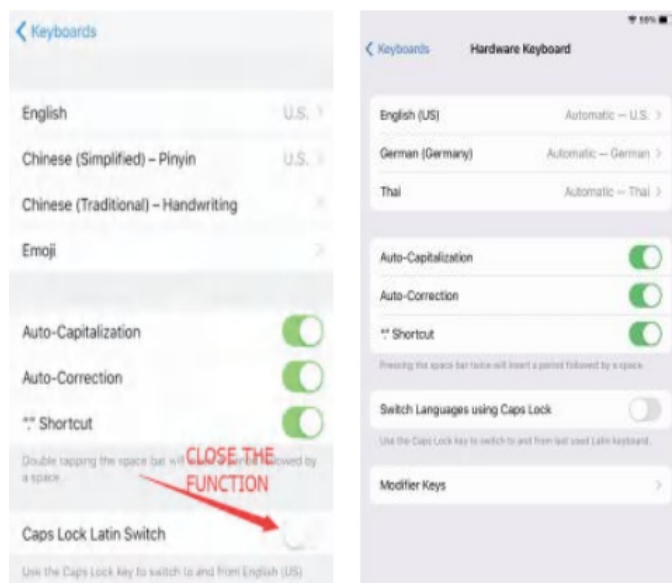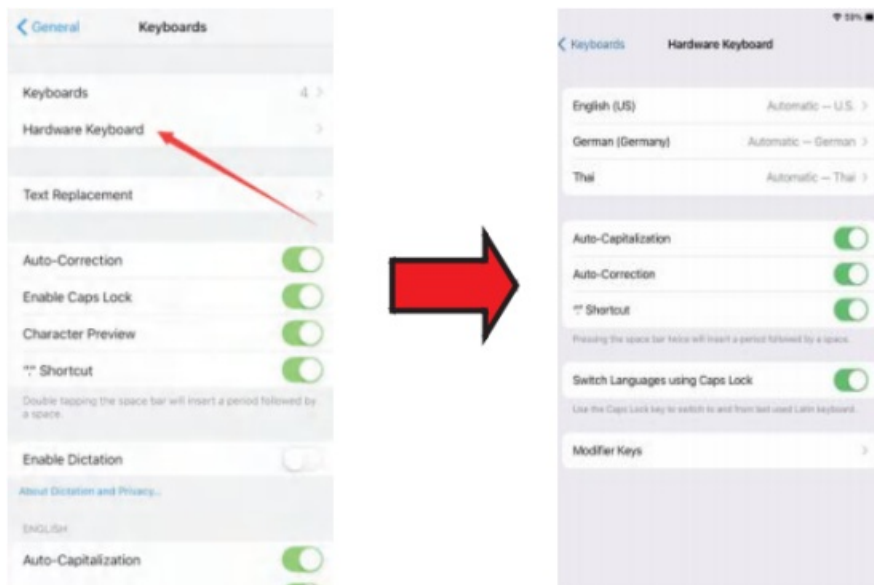

Warranty Card

User information

Company or personage full name

Contact address _____

TEL _____ Zip _____

The purchased product name and model NO.


Purchased date _____

This reason due to the product broken and damage is not include on the warranty:

(1) Accident, misuse, improper operation, or any unauthorized repair, modified or removed

(2) Improper operation or maintenance, when operation violation of the instructions or connection unsuitability power supply

(3) Or use consumables not provided by our company (such as spare batteries), unless such restrictions are prohibited by applicable law



FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Documents / Resources



[DeFengYuan X7 Case Keyboard](#) [pdf] User Manual
X7, X7 Case Keyboard, Case Keyboard, Keyboard

References

- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.