




## DFY PJ-5026D Wireless Keyboard for iOS User Manual

[Home](#) » [DFY](#) » DFY PJ-5026D Wireless Keyboard for iOS User Manual 



Wireless Keyboard  
User Manual (for IOS)

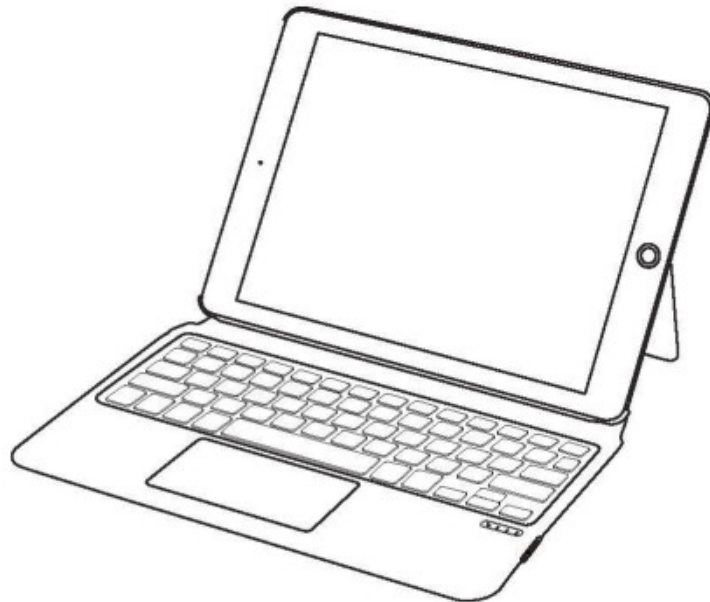

Package included: Instruction manual x 1  
Wireless Keyboard x 1  
USB Charging Cable x 1


## Contents

- 1 Product Model Specification
- 2 Getting Started Guide
- 3 Bluetooth Keyboard Connection Steps
- 4 Keyboard Shortcut Function Description
- 5 Touch pad gestures for systems above IOS 14.5
- 6 Warranty Card
- 7 Documents / Resources
  - 7.1 References


## Product Model Specification

1. Bluetooth Interface Standard
2. Operating Distance Available: 10 meters
3. Modulation System: GFSK
4. Working Current < 9mA (When the touchpad is working)
5. Standby Current < 0.3mA
6. Sleeping Current < 40uA
7. Charging Current 100mA/200mA (Backlight)
8. Standby Time: > 100 days
9. Charging Time: 2-3hours
10. Lithium Battery Capacity: 250mAh/500mAh (Backlight)
11. Working Time: > 50/100 hours (turn off the backlight)
12. Lithium Battery Life: 3 years
13. Key Strength: 80±10g
14. Key Life: 5 Million Stroke
15. Operating Temperature: -10°C – +55°C

## Getting Started Guide

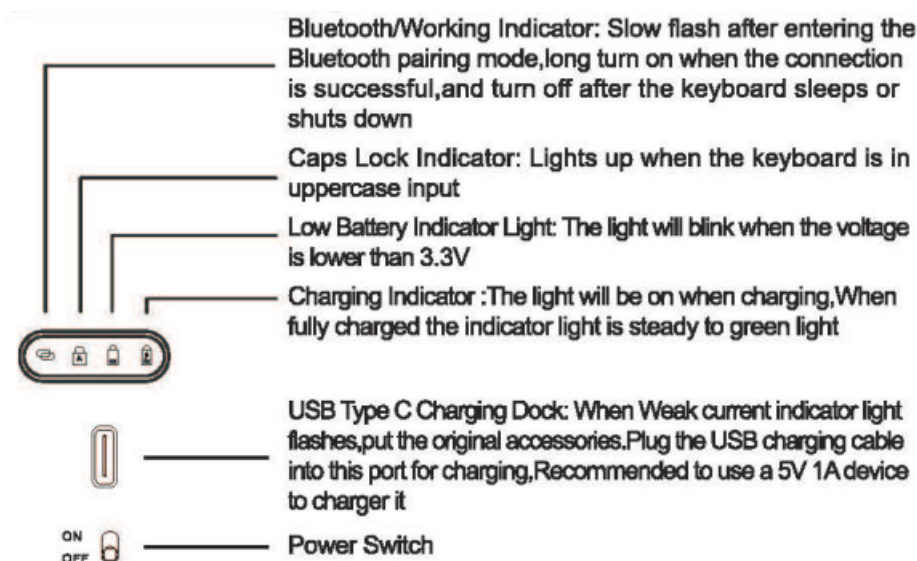


## Bluetooth Keyboard Connection Steps


1. Toggle the switch to ON, the Bluetooth indicator, Caps Lock indicator, and weak power Indicator will light up for 3 seconds at the same time, then the keyboard working indicator turn on, manually press **Fn + ** to enter pairing (the Bluetooth Indicator flashing slowly )




2. Open and lock your tablet and click on the 'Settings' icon

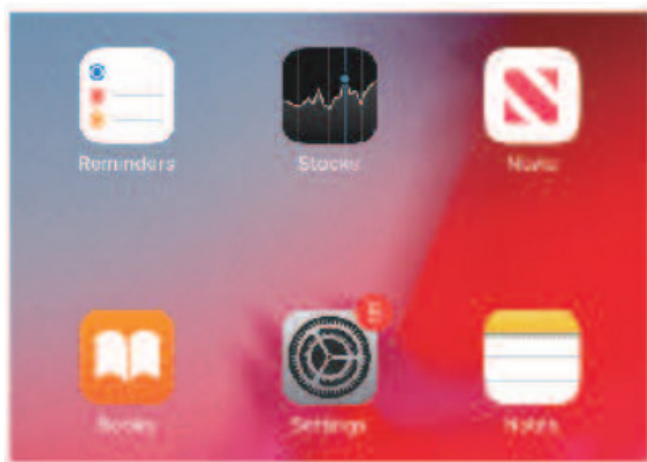


3. In the settings menu, click on the "Bluetooth" menu

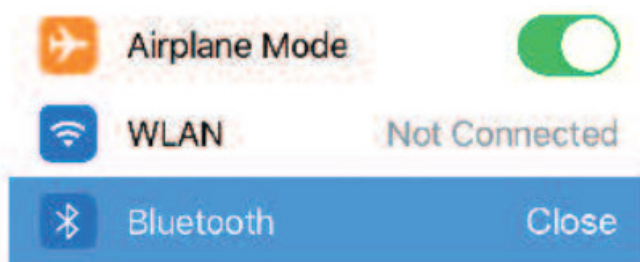


4. Turn on the Bluetooth switch and the tablet will automatically search for Bluetooth keyboard devices

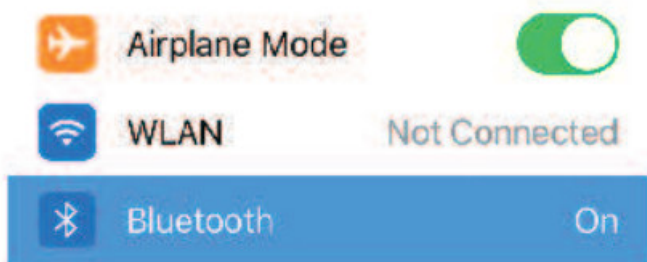

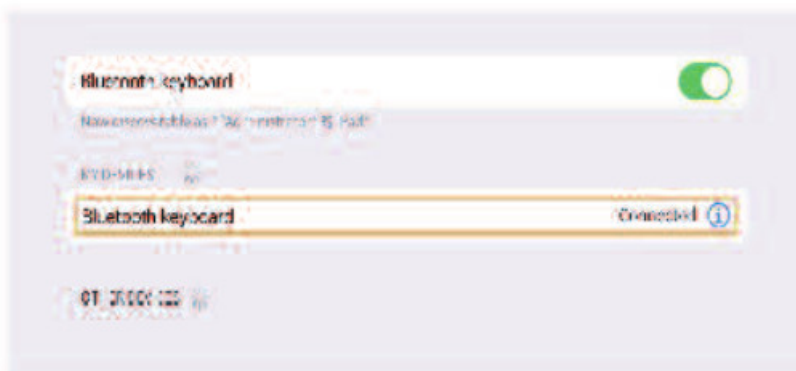


5. Discover the Bluetooth keyboard device: Bluetooth Keyboard, click it and confirm the connection, the Bluetooth keyboard will automatically connect

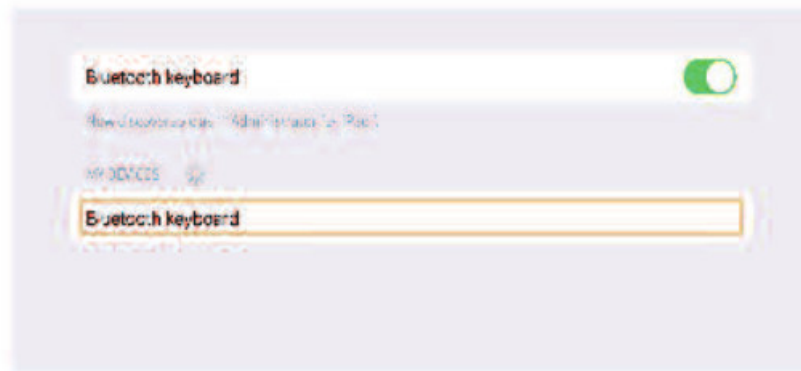

6. After the Bluetooth connection is successful, the work indicator will be on for a long time, and the Bluetooth device list will display "connected"



## Keyboard Shortcut Function Description

	Back to Home Page		Brightness –		Brightness +
	Search		ON1 /OFF Keyboard		o Screen Capture
	Previous tack		Pause/Play		Next Track
	Mute Key		Volume –		Volume +
	Cut		Copy		Paste
	Select all		Take a photo		Lock Screen
	Bluetooth pairing		Bazkight Bdghbess Ad justment 2		Combination Function Keys
	Voice text input		select forward part		select backytord part
	Touch pad on/off		Languw age Sitching		Multiaskhg window

**Note 1:** Screen capture function is divided into short press and long press to adapt to different models

**Short Press:** for models with Home button

Long Press for 2 seconds: for models without Home button

**Note:** This button is only available on the bacdklit version of the keyboard



Color Adjustment: direct click,a total of 7 color cycles





















Brightness Adjustment: Fn combination button,a total of 3 brightness cycle



Voice Input: the first time to use,you need to enable dictation

## Touch pad gestures for systems above IOS 14.5

Single Finger Operation		<b>Click</b> (Press with one finger until It feels a little pressed)		<b>Click and hold</b> (Press and hold with one finger)
		<b>Drag and move</b> (Tap and hold an Item, the n swipe your finger across the trackpad to move It)		<b>Wake up iPad</b> (Click the touchpad) Or if you are using an external keyboard, press any key
		<b>Open dock</b> (Swipe the pointer with one finger from the bottom of the screen)		<b>Back to home screen</b> (Swipe the pointer with one finger from the bottom of the screen,After the dock appears, swipe the pointer from the bottom of the screen again)
		<b>Show side dock</b> (Swipe the pointer across the right edge of the screen with one finger.To hide the side dock, swipe right again)		<b>Open “control center”</b> (Move the pointer with one finger to select the status icon at the top right,end click Or select the status icon in the upper right and swipe up)
		<b>Open “notification center”</b> (Move the pointer with one finger to select the status icon at the top left,and click Or use one finger to move the pointer near the middle of the top of the screen)		

Two Fingers Operation		<b>Scroll up or down</b> (Double pointing swipe up or down)		<b>Scroll left or right</b> (Double pointing left or right swipe)
		<b>Zoom</b> (Place your fingers close together. Open to enlarge or knead to shrink)		<b>Open “today” view</b> (Swipe right with double pointing when the home screen or lock screen is visible)
		<b>Open search from the home screen</b> (Double pointing down swipe)		<b>Auxiliary click</b> (Double pointing: press the ton on the home screen, the mail in the mailbox and the ‘camera” button In the ‘control center” to display Its quick operation menu) Or if you are using an external keyboard, you can press and hold the control key and click the touch pad
Two Fingers Operation		<b>Go to the home screen</b> (Three fingers awlpe up)		<b>Open the app switcher</b> (Swipe three points up, pause, and then raise your fingers) Or knead four fingers, pause and lift your fingers
		<b>Switch between open apps</b> (Three fingers point left or right swipe)		



### Attention

1. When not use for long time,suggest to dose keyboard,in order to prolong battery lift
2. In order to get longer battery lift,charging before keyboard power light flashes,charging time must be better more than 2 hours

### Energy Saving Sleep Mode

When keyboard not use will be enter sleep mode after 15 minutes,keyboard indicator will off press any key 3s to wake it up when need use again,then keyboard indicator will turn on

### Troubleshooting

1. Make sure the power is turned on
2. Ensure keyboard operable distance
3. Make sure the battery has power



4. Ensure the device's Bluetooth was turned on
5. Ensure the wireless keyboard was connected with the Bluetooth
6. Ensure the wireless keyboard paired successfully


### Cleaning

Washing, alcohol or a similar cleaning agent decontamination keyboard

### Charging

When battery is low, the power indicator blinking, means need to charge the keyboard 1. Connect Genuine Parts USB cable B port to keyboard cradle 2. Connect USB cable A port to power adapter or computer USB port 3. During charging, the charging indicator will be on, and it will turn green when fully charged When system is upgraded to iOS10 – iOS12, the CapsLock key on the Bluetooth keyboard will default to the function of switching to the Latin keyboard (the CapsLock key will default to the function of switching language in iOS 13-15), which makes it impossible to switch between upper and lower case. You can do the following settings to restoring normal functionality:

1. First connect the bluetooth
2. Settings -> General -> Hardware keyboard
3. After clicking in, you will see "Caps Lock Latin Switch", (iOS 13-15 CapsLock key will default to switch language function)" is on, just turn it off

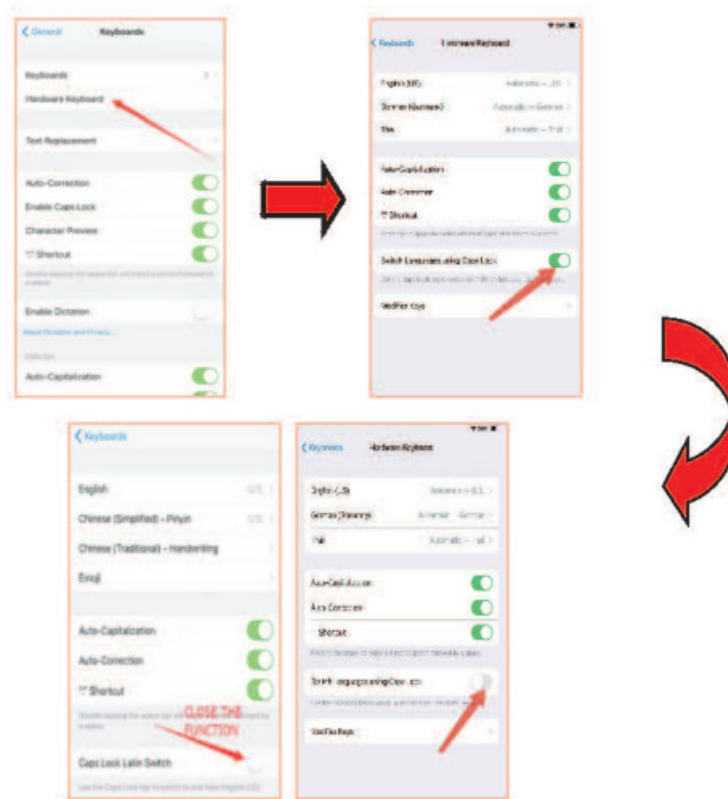

### Warranty Card

User information

Company or personage full name.....

Contact address.....

TEL..... Zip .....

The purchased product name and model NO.....

Purchased date \_.....


This reason due to the product broken and damage is not include on the warranty:

1. Accident, misuse,improper operation,or any unauthorized repair, modified or removed
2. Improper operation or maintainance,when operation violation of the instructions or connection unsuitability power supply
3. Or use consumables not provided by our company (such as spare batteries), unless such restrictions are prohibited by applicable law



---

## Documents / Resources

	<a href="#">DFY PJ-5026D Wireless Keyboard for iOS</a> [pdf] User Manual PJ-5026D, 2ADBH-PJ-5026D, 2ADBHPJ5026D, pj 5026d, PJ-5026D Wireless keyboard for iOS , Wireless keyboard for iOS, PJ-5026D Wireless Keyboard
---	---

## References

- [User Manual](#)