



Divoom DITOOPRO Bluetooth Speaker User Manual

[Home](#) » [Divoom](#) » Divoom DITOOPRO Bluetooth Speaker User Manual 




Contents

- [1 NICE TO MEET YOU!](#)
- [2 PRODUCT DETAILS](#)
- [3 HOW TO OPERATE DitooPro ON-SCREEN MENU?](#)
- [4 HOW TO CONNECT WITH THE SPEAKER?](#)
- [5 PRODUCT SPECIFICATION](#)
- [6 SAFETY GUIDE](#)
- [7 PRODUCT WARRANTY CARD](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

NICE TO MEET YOU!

Thank you for purchasing the DitooPro, the best desktop gadget from Divoom. With DitooPro & its companion APP, you can create pixel art designs and interact with the largest pixel art community, as well as to enjoy its great audio. DitooPro is capable of many daily functions, and it can learn more via software updates.


WHAT'S INCLUDED?



DitooPro



User manual




USB Type-C
charging cable

- DitooPro
- User manual
- USB Type-C charging cable

Thank you for purchasing a Divoom product! Please read this manual carefully. You can also visit www.divoom.com to learn more about our other products. Due to the nature of the technology product, the information on this manual is subject to change without prior notice. If you have any questions, please contact Divoom customer support.


PRODUCT DETAILS

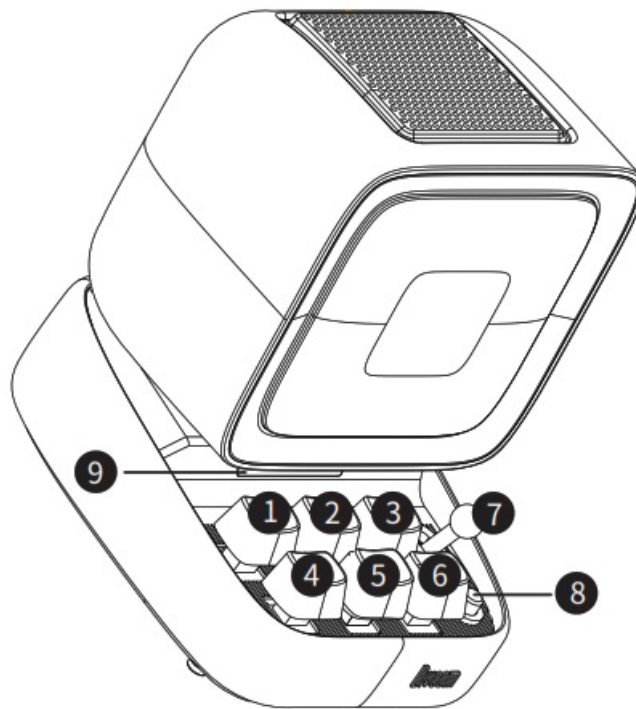

1. 'm' button Press: Enter/Exit menu system Hold: Turn On/Off the keyboard backlight
2. '+' button Press: Increase volume Hold: Increase brightness
3. Lighting button Press: Change light function Hold: Change light effects
4. '←' button Press: Previous song Hold: Last light effect
5. '-' button Press: Decrease volume Hold: Lower brightness
6. '→' button Press: Next song Hold: Next light effect
7. **Lever** Short pull Play/Pause/Answer/End long pull Start voice memo recording/Rejecting a call
8. Audio source button **Short pull** Switch between the different audio sources

Double press Disconnect Bluetooth connection

9. **Battery** Press any button to check the battery status
10. Bass port
11. Rear port flap
12. Reset pinhole
13. USB-C charging port
14. ON/OFF button Hold: Power ON/OFF speaker
15. **TF card slot** Playback music from TF card

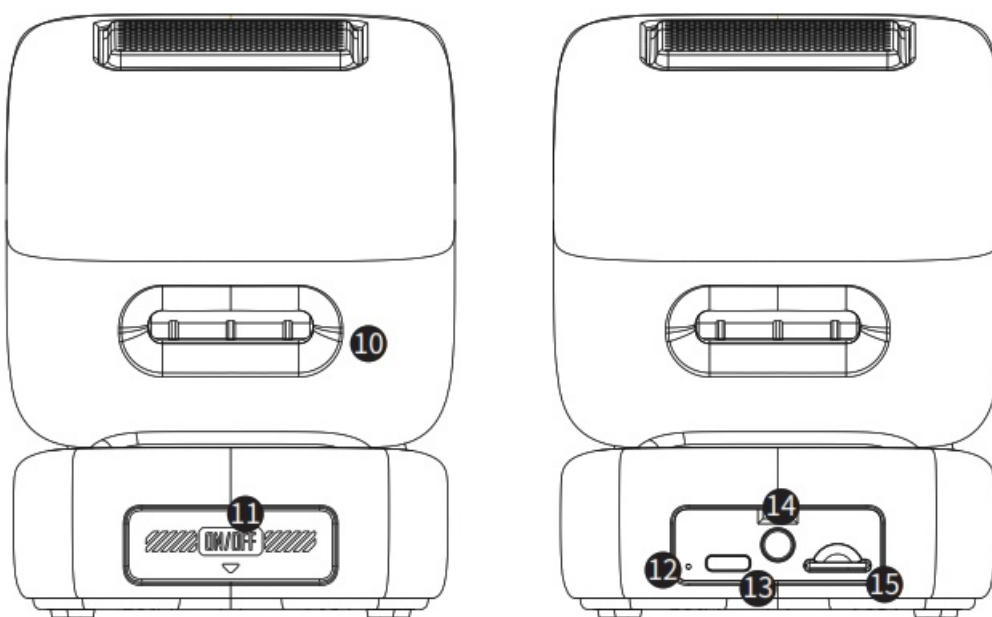

HOW TO OPERATE DitooPro ON-SCREEN MENU?

1. Press the ' ' button to activate the menu system.
2. Press '→←' buttons to switch between the menu functions.
3. Pull the lever to confirm selection, and press the ' ' button to exit the current menu.

In Audio, rotate between Bluetooth/SD

Pull the lever to confirm selection, then play audio with the control buttons. In Game, rotate and switch between the different games Use '→←' buttons to switch between different games, and pull the lever to confirm selection. Press the ' ' button to exit.

In Alarm, press the ' ' buttons to change the time value, and pull the lever to confirm and activate the alarm

Press the ' ' button to delete & exit the menu. For more info, see the below section on alarm settings. In Tools, rotate between the different mini tools Use '+-' buttons to switch between different tools, and pull the lever to confirm selection. Press the button to exit. In Draws, pull the lever to activate the Draw function

1. Use '→←' buttons to switch between the designs, and pull the lever to confirm selection.
2. Use '+-' buttons to move the cursor, and pull the lever to fill in the colors.
3. Press the lighting button to review the design hint, or press the button to exit.

HOW TO CONNECT WITH THE SPEAKER?

Download mobile application



<http://www.divoom.com/AppDownLoad/>


Search 'Divoom' application for both iOS and Android systems. *Please grant all privilege requests prompted by the APP.

For the Apple iOS system




Search and connect the 'DitooPro-audio' in Bluetooth settings, then search and connect the 'DitooPro-light' in the Divoom APP.

For Android system

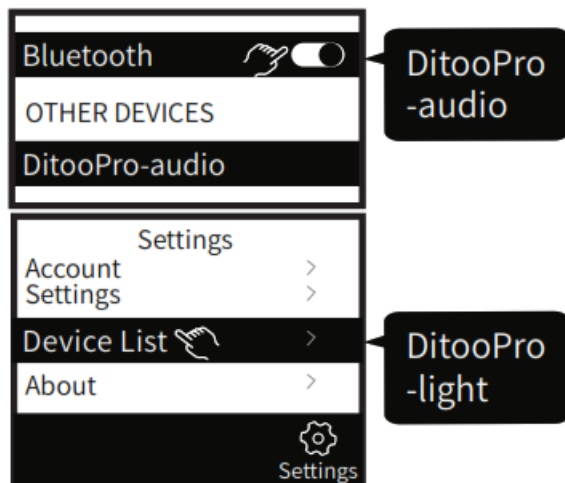

FOR APPLE IOS


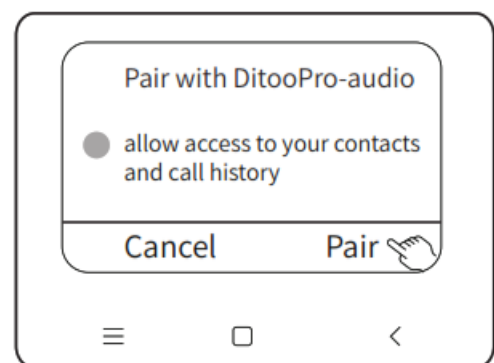


FOR ANDROID



Search and connect the 'DitooPro-light' or 'DitooPro-audio' in APP or Settings.

HOW TO RECORD A VOICE MEMO (up to 60 seconds)?

1. Pull and hold the lever, which DitooPro will start to record a voice memo.
2. Pull the lever to end the recording, and pull it again to play the voice memo. *The message will be erased after being played.

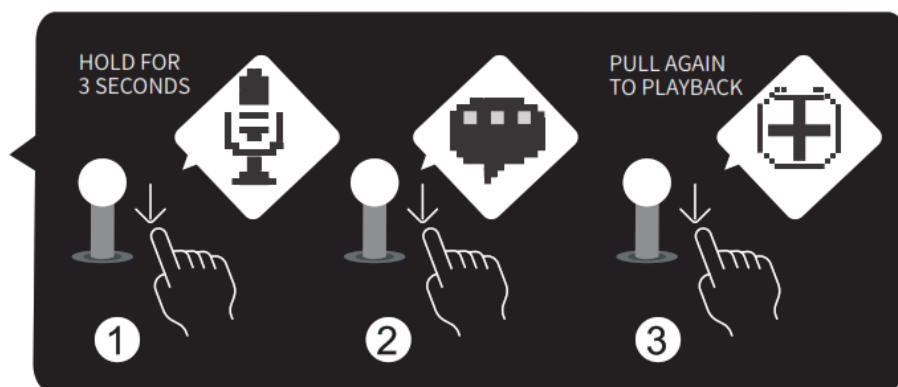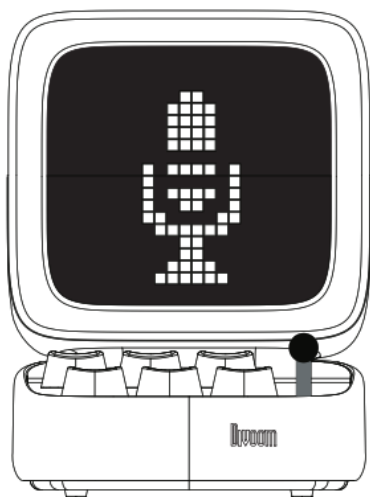


HOW TO SET UP A MANUAL ALARM?

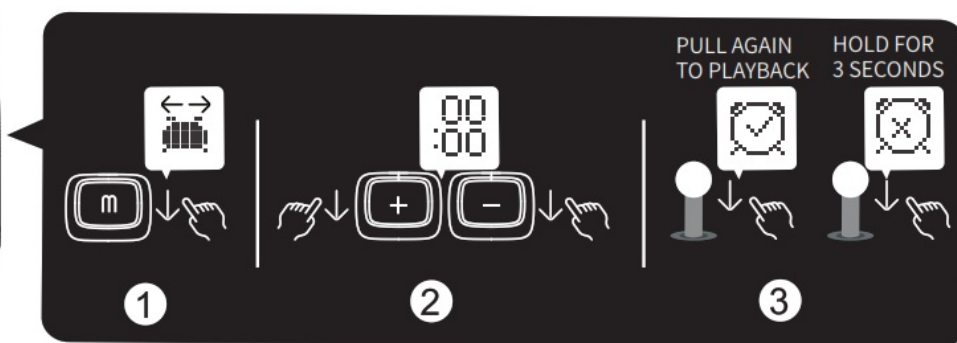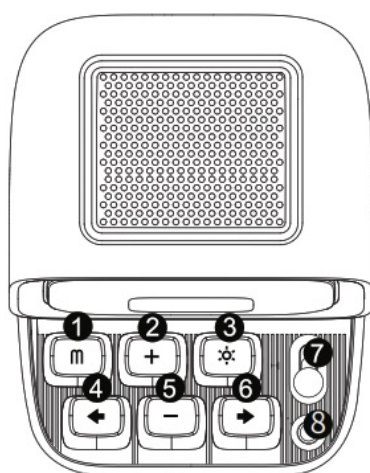

1. Press the ' ' button and switch to the alarm setting menu.
2. Pull the lever to the confirm and enter alarm settings.
3. Press ' ' to change the time value, and pull the lever to confirm settings.
4. Pull the lever to confirm/activate the alarm, and press the '+_ ' button to delete and exit the alarm menu.


*Only one manual alarm is available. For more alarm options, please use the mobile APP.

HOW TO PLAY THE TF CARD AUDIO?

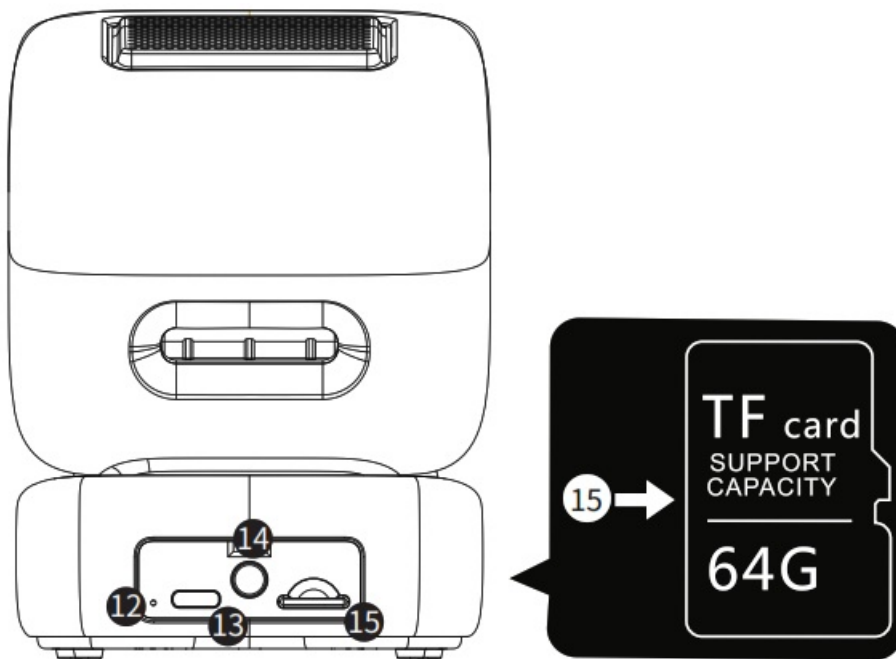

1. Insert the TF card, and the audio should start to play automatically.
2. Press the ' ' button, and pull the lever to select the audio option.
3. Switch to the 'SD card', and pull the lever to confirm selection.
4. Play the audio via the control panels (play/pause/volumes/change songs). *MP3/WAV/FLAC are the only supported file formats. The maximum supported capacity is 64GB.

HOW TO CHARGE?

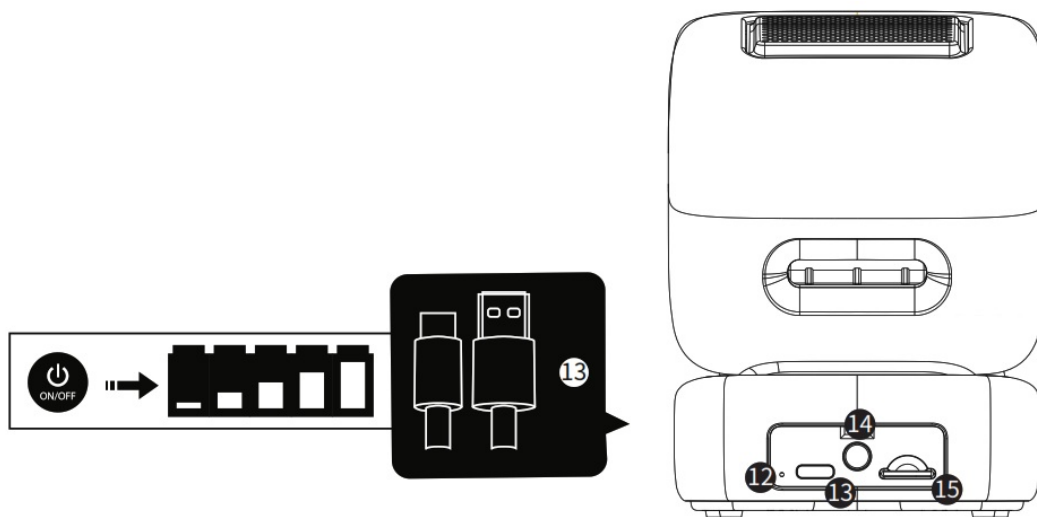

1. Insert the USB Type-C cable into the speaker.
2. Press the power button if you want to check the battery percentage.
3. When charging, the indicator light will light. Upon 100% charged, the indicator will turn off.*Please use a 5V 2A charger and do not use a higher voltage charger.

PRODUCT SPECIFICATION

Dimension: 114.2 x 90 x 121.2mm Weight: 533g Speaker size: 48mm Output power: 15W Frequency response: 80-20KHz Signal-to-noise ratio : 72dB Playback time : 8hrs (tested under a moderate volume with a controlled environment) Eurocode information: Prolinx GmbH Brehmstr.56,40239	Duesseldorf Germany Jie Xue 0049 211 3105 4698 eu@eulinx.eu Battery capacity: 2500mAh Battery voltage: 7.2V Battery charge time:4hrs Charge : 5V 2A Wireless range : 10M/33ft Bluetooth compliant: 5.0
---	--

SAFETY GUIDE

Please read the following instructions carefully:

1. Please follow our product installation about operation instructions.
2. Always place the speaker on a smooth and stable surface.
3. Please place the speaker in an open area for the best sound quality. Do not block the surroundings of the speaker.
4. Do not push any objects into speaker vents or slots. Do not apply any great force on the speaker.
5. Please keep the speaker at a room temperature environment. Do not place the speaker near any heat sources (such as radiators, heat registers, stoves, fire place, or direct sunlight). Do not place the speaker near any open flame source.
6. Do not attempt to service the speaker by yourself. Always refer to the instructions by qualified service personnel.
7. To avoid the risk of electrical hazards, do not expose this speaker to wet surfaces.

DECLARATION OF CONFORMITY



This device meets the essential requirements of the following Directive 2014/53/EU of the European parliament of the council of 16 April 2014.



The waste container symbol with the X through it on the device indicates that the device must be disposed of separately from normal domestic waste at an appropriate waste disposal facility at the end of its useful service life.

Please dispose of used batteries properly following local regulations. Do NOT Incinerate. Removal of the rechargeable lithium-ion battery. In this product should be conducted only by a qualified professional.

ROHS This product is in compliance with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference.
2. this device must accept any interference received, including interference that may cause undesired operation, changes, or modifications not expressly approved by the party responsible for compliance could void the user's warranty to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital devices, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this

equipment does cause harmful interference to radio or television reception, which it can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio ATV technician for help.
- The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

WARRANTY INFORMATION

This product is covered by a limited warranty from Divoom. For complete warranty details, visit the website www.Divoom.com.

This product is in compliance with Directive 2011/65/EU of the European Parliament and of the Council of June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

1. If you believe your product is defective within the warranty period, please bring the product back to where the product was initially purchased. Alternatively, or with any other questions or concerns, please call customer support at +0755 86290767, or contact us via email at info@divoom.com.
2. If within 12 (24 if required by local law) months of purchase this device or any part thereof is proven to be defective by reason of faulty workmanship or defects in materials, we will at our option repair or replace the same free of charge of labor or materials on condition that similar to the product current condition.
3. The sales invoice or receipt with the date and source of purchase must be presented together with the defective unit. We cannot validate the product warranty information without an invoice.
4. The warranty does not cover product failures that have been caused by the use of accessories or other peripheral devices which are not Divoom branded original accessories intended for use with the product.
5. The warranty does not cover product failures caused by: modification, repair, and disassembling by any person who is not authorized by the manufacturer.
6. The warranty is non-transferable. Any defective unit or part shall become the property of the manufacturer.
7. The warranty does not cover any damage caused by misuse, drop, hit or negligence.
8. The customer is responsible for the return shipping charges.

PRODUCT WARRANTY CARD

Product name	Serial number
purchasing store	Purchasing date
Owner name	Contact Email
owner address	

Divoom official website: www.divoom.com/www.divoom-gz.com

Divoom Warranty Information: <http://www.divoom.com/article/detail/id/60.html>

Divoom product FAQ: <http://www.divoom.com/artiele/detail/id/59.Minl>

Divoom Support Email: support@divoom.com

Divoom support contact number: 0755-29494509

Divoom repair & return address: Shenzhen Divoom Technology Limited Corporation 1st Floor, 5th Building, XinLianHe Industrial Complex Shajing Town, Baoan district Shenzhen City, Guangdong Provinces 518000 The people's republic of China.



Documents / Resources

	<div><div>Divoom DITOOPRO Bluetooth Speaker [pdf] User Manual</div><div>DITOOPRO, A8IDITOOPRO, DITOOPRO Bluetooth Speaker, DITOOPRO, Bluetooth Speaker</div></div>
--	--

References

- D

[Divoom Pixel Art Game Led Bluetooth Speaker & Led Pixel Display](#)