



DoorBird D21X Call Buttons Installation Guide

[Home](#) » [DoorBird](#) » DoorBird D21X Call Buttons Installation Guide 

Contents


- [1 DoorBird D21X Call Buttons](#)
- [2 D21X CALL BUTTONS
INSTALLATION](#)
- [3 D11X CALL BUTTONS
INSTALLATION](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)






DoorBird D21X Call Buttons

DoorBird-D21X0-Call-Buttons-PRODUCT


D21X CALL BUTTONS INSTALLATION

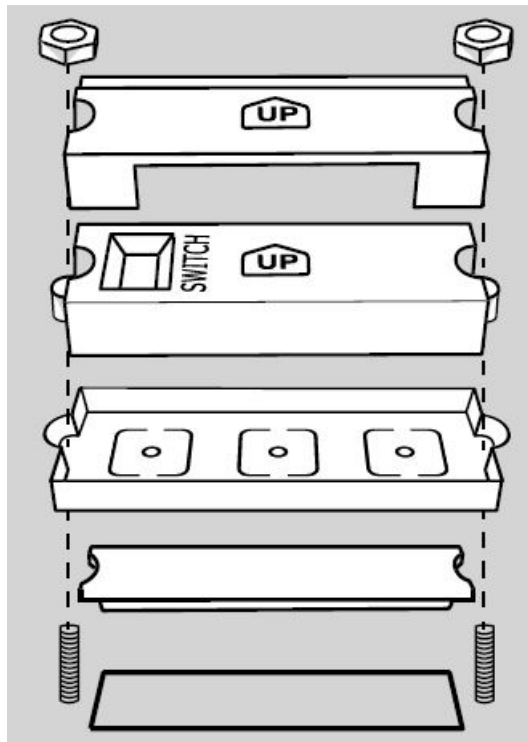

Make sure that the call button module is pointing upward according to the “UP” mark and is encased by the silicone seal.

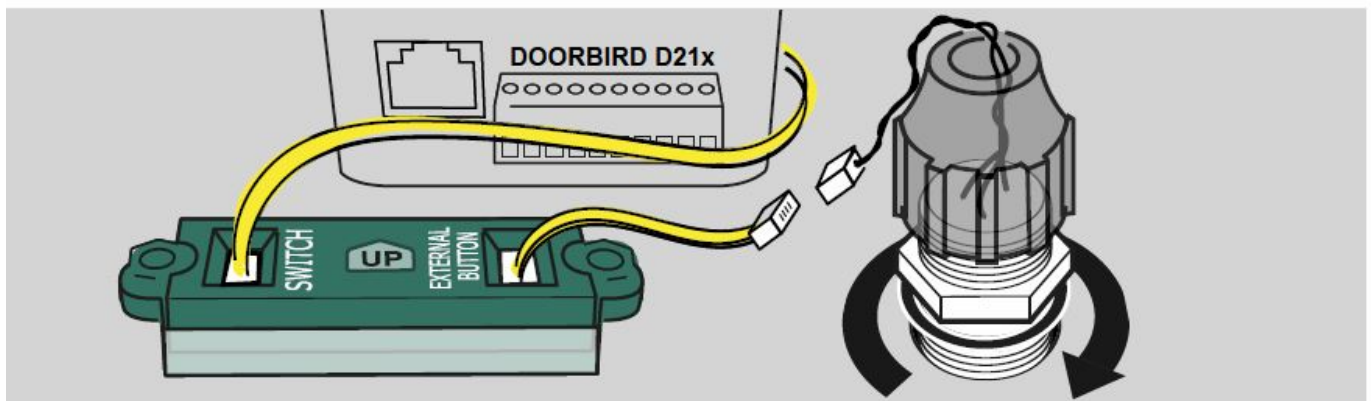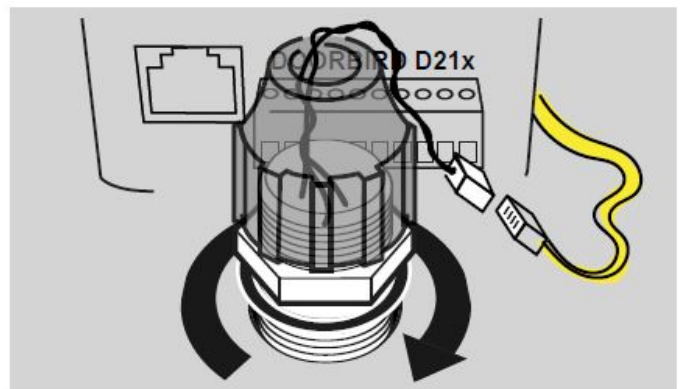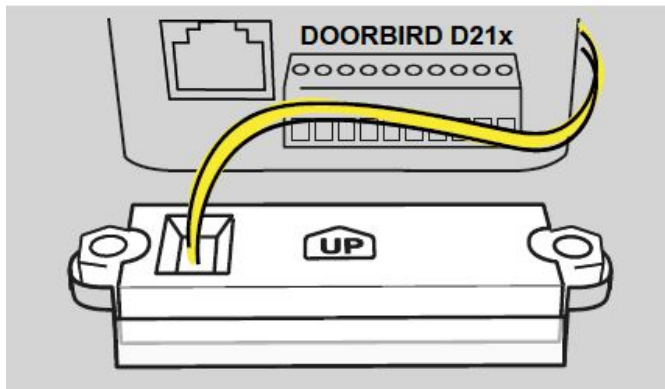


Use the yellow cable of the door station to connect a single call button.
For call buttons with a separate nameplate, the round call button is also connected to the nameplate module.
Make sure that the sealing rubber is seated between the front panel and the nut.

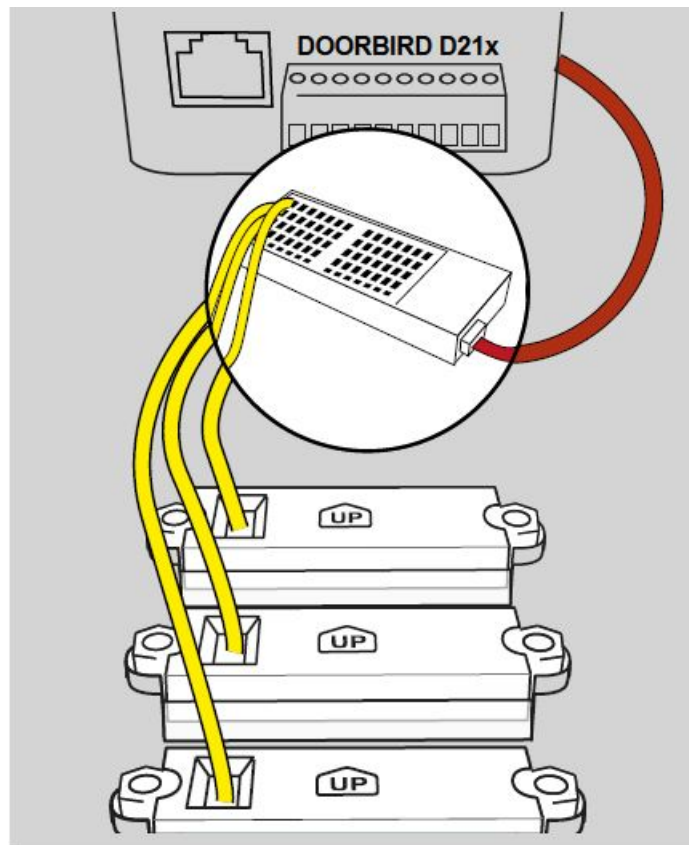


For door stations with several call buttons, the individual call buttons are connected to the ports of the Multi-Tenant Module using the yellow cable.


D11X CALL BUTTONS INSTALLATION

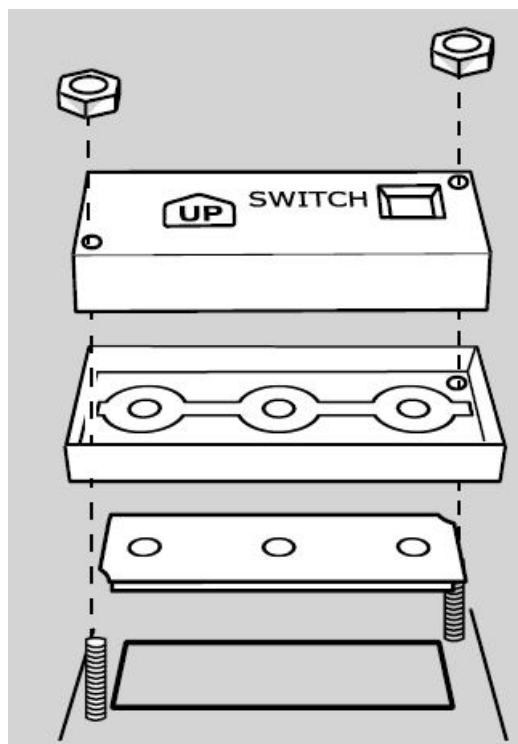

Make sure that the call button module is pointing upward according to the “UP” mark and is encased by the silicone seal.

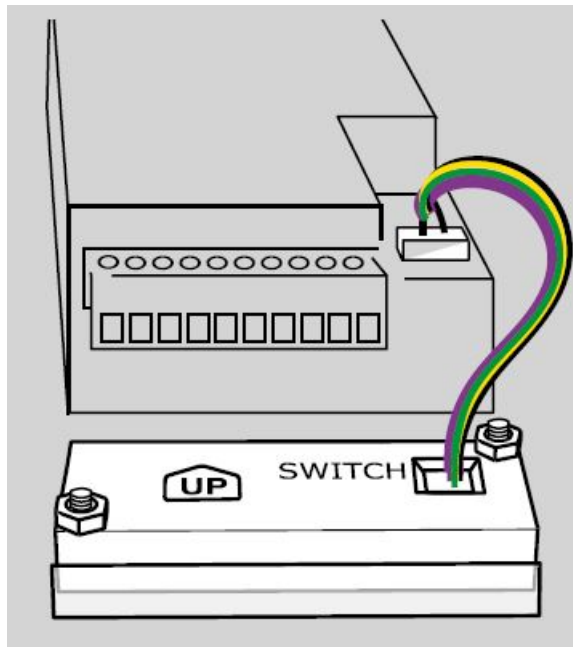


Use the four-wire cable from the “CB” port of the door station to connect a single call button.

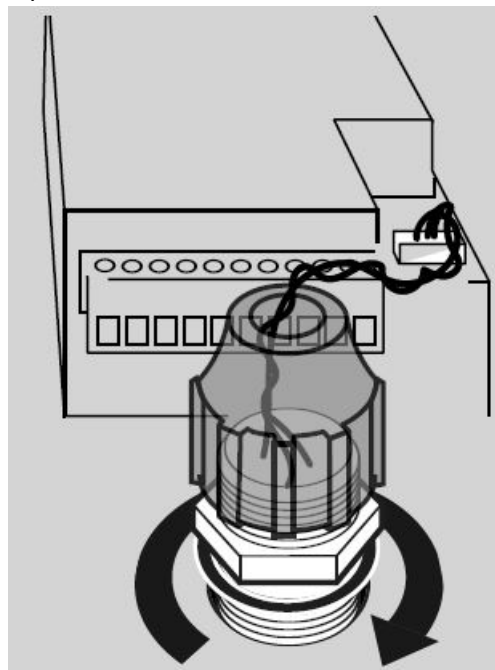

For the round call button, make sure that the sealing rubber is seated between the front panel and the nut.

Documents / Resources



[DoorBird D21X Call Buttons](#) [pdf] Installation Guide
D21X, Call Buttons, D21X Call Buttons

References