



DS18 V4HL.V2 4 Channels Smart Line Output Conversion with Speaker Emulator Instructions

[Home](#) » [DS18](#) » DS18 V4HL.V2 4 Channels Smart Line Output Conversion with Speaker Emulator Instructions



Contents

- [1 OWNER'S MANUAL](#)
- [2 V4HL.V2](#)
 - [2.1 4 CHANNELS SMART LINE OUTPUT CONVERSION WITH SPEAKER EMULATOR](#)
- [3 V4HL.V2](#)
 - [3.1 FEATURES](#)
 - [3.2 WIRING](#)
 - [3.3 SPECIFICATIONS](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)

OWNER'S MANUAL

V4HL.V2

4 CHANNELS SMART LINE OUTPUT CONVERSION WITH SPEAKER EMULATOR




V4HL.V2

FEATURES

- 4 Ch High-level speaker input to Low-level RCA Output
- Cable harness connector for easy installation
- Surface mounting component technology
- Lowest impedance and best power filter
- Fr4 Double sides PC board
- Remote trigger output with signal sensing
- Power LED Indicator to Show Working Status
- Speaker emulator to enable signal Output from some OEM amplifiers with speaker sensor

WIRING

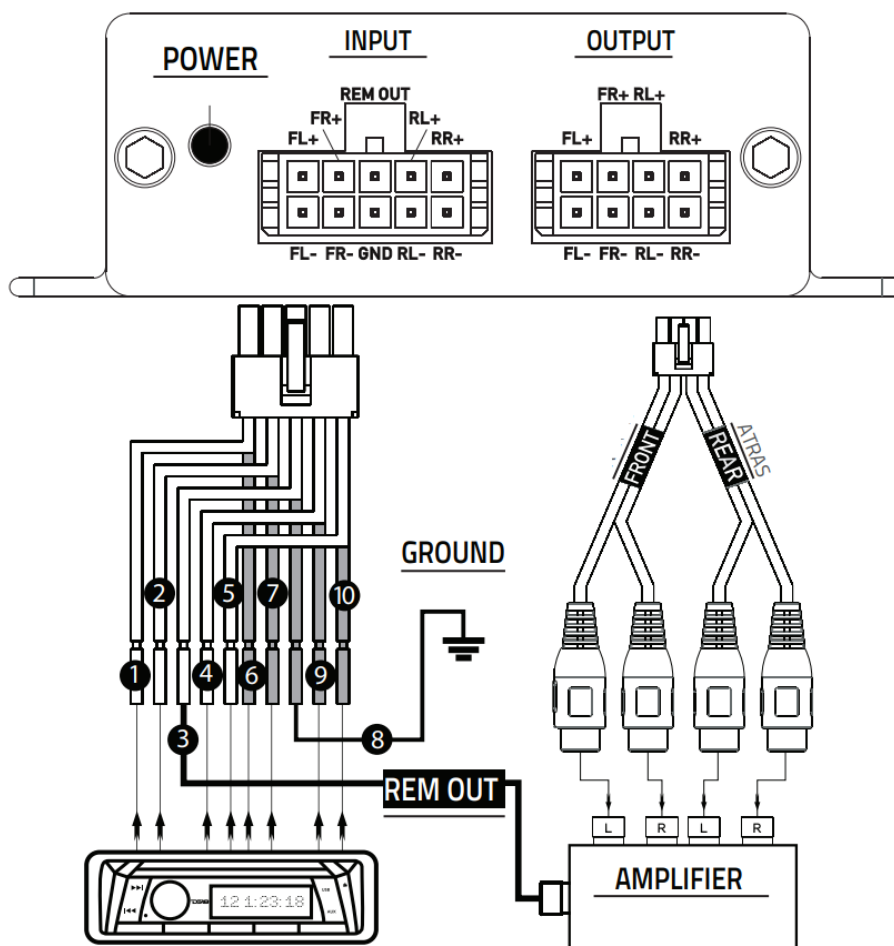

WIRING

1. FL+, White: Front Left speaker input (+).
2. FR+, Gray: Front Right Speaker input (+).
3. REM, Blue: Amplifier Remote Out (+).
4. RL+, Green: Rear Left Speaker input (+).
5. RR+, Violet: Rear Right Speaker input (+).
6. FL-, White / Black: Front Left Speaker input (-).
7. FR-, Gray / Black: Front Right Speaker input (-).
8. GND, Black: Ground Chassis Negative (-).
9. RL-, Green / Black: Rear Left Speaker input (-).
10. RR+, Violet / Black: Rear Right Speaker input (-).

SPECIFICATIONS

- Input Up to 55W
- Output Up to 8V
- Remote Output Voltage 12 V
- Frequency Response 10Hz-30KHz
- Input Impedance 20 K OHM
- Standby Current 200mA
- Dimensions L / W / H / 2.93" x 2.44" x 0.91", 74.6 mm x 62mm x 23.1mm

WARRANTY

Please visit our website [DS18.com](https://www.ds18.com) for more information on our warranty policy.

We reserve the right to change products and specifications at any time without notice. Images may or may not include optional equipment.



WARNING:

Cancer and Reproductive Harm. www.P65Warning.ca.gov



FOR MORE INFORMATION

PLEASE VISIT

[DS18.COM](https://www.ds18.com)

WE LIKE IT LOUD



V1

Documents / Resources



[DS18 V4HL.V2 4 Channels Smart Line Output Conversion with Speaker Emulator](#) [pdf] Instructions

V4HL.V2 4 Channels Smart Line Output Conversion with Speaker Emulator, V4HL.V2, 4 Channels Smart Line Output Conversion with Speaker Emulator

References

- [Official DS18 Pro Audio Store - Speakers, Subwoofers, Amps & More!](#)

