

EDISION EDI-RCU 4 Learn Remote Control Instruction Manual

Home » EDISION » EDISION EDI-RCU 4 Learn Remote Control Instruction Manual





EDI-RCU 4 Learn MANUAL INSTRUCTION





MANUAL INSTRUCTION FOR LEARN REMOTE CONTROL EDI – RCU 4 Learn

EDI-RCU 4 Learn REMOTE CONTROL is compatible with all EDISION STB's*, plus it is pre-programmed with 4 basic functions for SAMSUNG & LG tv sets. Alternatively, you can program its 4 programmable buttons to any 4 functions of your TV.

LG & SAMSUNG are brand names that belong solely to LG Electronics Inc. and Samsung Electronics Co., Ltd respectively. Any brand name reference in this text is only for informational purposes towards the consumer that is interested in the product. There is a minor percentage that some SAMSUNG & LG TV models or some of their functions are not fully supported or not supported at all. If this situation occurs, please contact us.

Your set-top-box remote control has 4 learning-function keys, in the up right-hand side TV keypad panel area. Each one can be used accordingly as the following example:

- 1. Turning your TV set ON/OFF [SET]
- 2. Increasing/decreasing volume [VOL+, VOL-]
- Switching between TV/AV mode [TV/AV]
 The other 39 keys are for the control of the EDISION set-top box.

SET UP FOR LEARNING FUNCTION

• Press [SET] key in the up right-hand side TV keypad panel area continuously for 5 Sec. until the LED lights up

and keeps fighting, then release the key. This means the remote control is in the learning mode.

- Within 10 seconds, press the key in the original TV IR control, which needs to be learned, for example, the **[POWER]** key, then the red LED is flashing. It means this button is ready to receive the learning signal.
- Aim the emission port of the original TV remote control at the front at the emission port at the front of your settop box remote control (distance between these two ports has to be about 2~3 CM).
- Then press the key which is to be learned in your original TV remote control, for example, the **[POWER]** key of your original TV remote control continuously for 3 seconds. If the red LED flashes quickly three times and keep lighting, it means the set-top box remote control has succeeded in receiving the signal and you have completed the learning procedure of ON/OFF **[TV POWER]** key.
- Then release the [POWER] key of your original TV remote control.

If the copying procedure fails, the red LED will blink and stay OFF. In this case please repeat the procedure. For the next programmable function, please repeat steps 1 to 2:

- Switching between TV/AV mode [TV/AV]
- Increasing/decreasing volume [VOL+, VOL-]
 Now you can operate your TV with the 4 programmed by you keys of your set-top box remote control. During the operation, the LED will flash to indicate that the signal is transmitted!



REMARKS

- 1. If no signals are sent in 10 seconds, the device will exit the learning mode automatically.
- 2. Please bear in mind that only the 4 keys are in the up right-hand side TV keypad panel area. After the successful learning, the 4 keys are used to control your TV set and the rest 39 keys are for controlling your settop box.

- 3. In the process of learning, if on the new remote control the red led flash three times and keep lighting for 5 seconds, the remote control is ready for the learning of the next key.
- 4. The 5 learning keys are capable of learning signals sent from remote controls of different TV brands.
- 5. Please bear in mind that most TV could be learned, but not all. If you have any questions, please do not hesitate to contact the shop that you purchased it from.


EDISION HELLAS LTD • FARMAKEIKA - 57001 N. RISIO • THESSALONIKI - GREECE



Contents

- 1 Documents / Resources
- 2 Related Posts

Documents / Resources

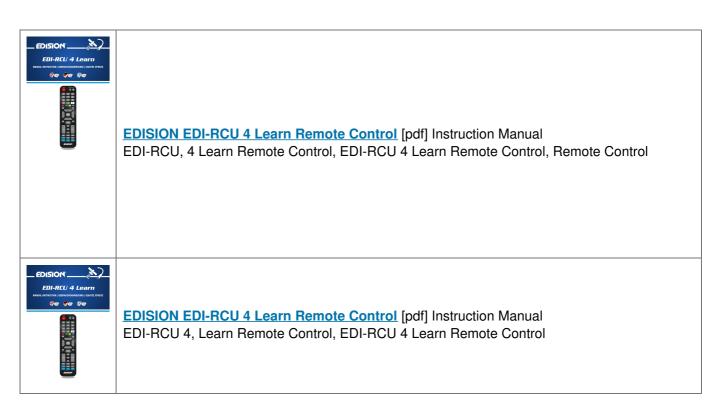

Manuals+,

^{*}For EDISION STB compatibility, please visit our webpage