



Einhell CE-JS 18/1 Jump Start Power Bank Owner's Manual

[Home](#) » [Einhell](#) » Einhell CE-JS 18/1 Jump Start Power Bank Owner's Manual 

Contents

- [1 Einhell CE-JS 18/1 Jump Start Power Bank](#)
- [2 Features & Benefits](#)
- [3 Technical Data](#)
- [4 Logistic Data](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)




Einhell CE-JS 18/1 Jump Start Power Bank



- **Ident No.:** 21020
- **Bar Code:** 4006825626353

The Einhell CE-JS 18/1 Jump Start Power Bank is a compact, handy jump start and power station which is great to have in the car. With a single unit, you can jump start the car when the battery is dead, and you can also quickly and easily charge cell phones, laptops, cameras, etc. The high capacity 3 x 6000 mAh (computationally) lithium polymer battery delivers all the power you need. The built-in LED work lamp has an additional practical function which can be a big help in various emergency situations. 5V/ 2A USB, Speed Charging, 12V/10A and 19V/3.5A outputs are provided on the Power Bank. A 230V charging adapter as well as a practical protective storage case is included.

Features & Benefits

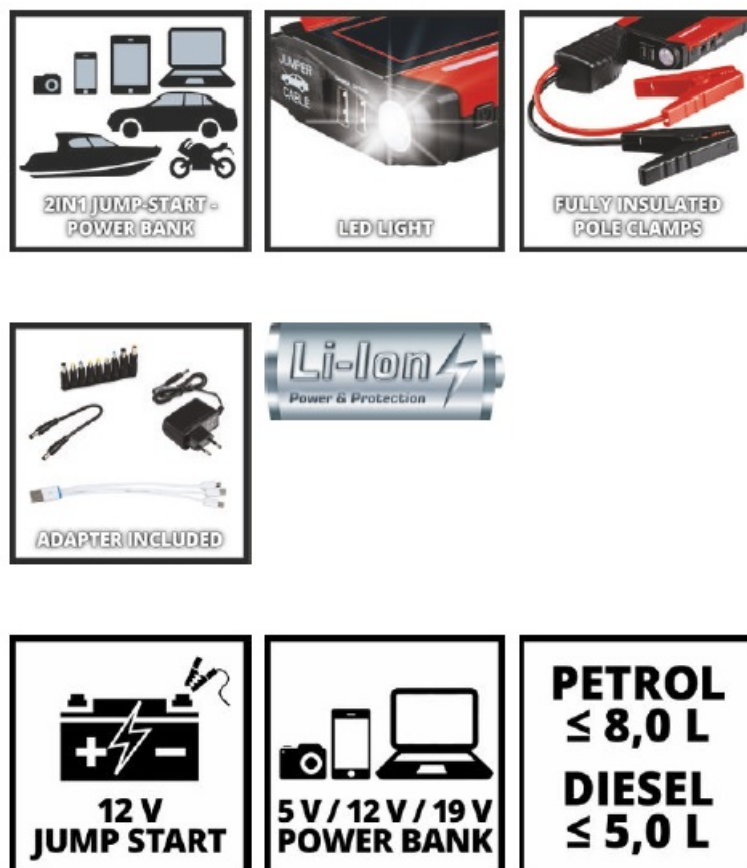

- Compact, handy jump start and power bank
- High capacity 3 x 6000 mAh lithium polymer battery
- LED charge status indicator
- LED work light (steady on, strobe light & SOS emergency signal)
- 12V/300A jump start function for empty/discharged car batteries
- For Petrol up to 8,000 ccm and Diesel up to 5,000 ccm
- Jump start cable with insulated clamps and overload protection
- Portable power supply for charging cell phones, laptops, cameras.
- USB 5V / 2A and Speed Charging output for cell phones, tablets..
- 12V / 10A output for car compressor/inflator, etc.
- 19V / 3.5A output for notebooks/laptops, etc.
- Incl. USB adapter cable (Micro/Mini/Typ C USB)
- Incl. adapter cable with 9 different notebook adapters

- Incl. 230V charging adapter
- Supplied in practical protective storage case

Technical Data


- Charger – Input 100-240 V | 50/60 Hz
- Charger – Output 15 V | 1000 mA
- Start voltage 12 V
- Peak current 600 A
- Start current 300 A – 5 sec
- USB Outlet 5 V | 2 A
- Consumption Outlet 12 V | 10 A
- Consumption Outlet 19 V | 3.5 A
- LiPo-battery (Wh) 66.6
- Charging time 6h

Logistic Data

- Product weight (kg) 0.7
- Gross weight (kg) 1.52
- Gross Weight 1.52 kg
- Dimensions single packaging 250 x 265 x 62 mm
- Pieces per export carton 10 Pieces
- Gross weight of export carton 16.3 kg
- Dimensions Export Carton 515 x 345 x 295 mm
- Container quantity (20" | 40" | 40"HC) 3780 | 9240 | 10560

Illustrations can contain accessories, which are not included in standard extent of delivery Illustration similar (in design), production-wise modifications reserved GS mark belongs to the product itself only, excluded accessory
Generated at: 14.10.2021 08:15

Documents / Resources

	<p>Einhell CE-JS 18/1 Jump Start Power Bank [pdf] Owner's Manual CE-JS 18 1 Jump Start Power Bank, CE-JS 18 1, Jump Start Power Bank, Jump Start, Power Bank, 4006825626353, 1091531</p>
---	--