

# **EJEAS V7 Motorcycle Bluetooth Helmet Intercom User Manual**

Home » EJEAS » EJEAS V7 Motorcycle Bluetooth Helmet Intercom User Manual




Motorcycle Bluetooth helmet intercom V7 USER MANUALS


**EJEAS V7 Motorcycle Bluetooth Helmet Intercom** 

#### Contents


- 1 V7 Motorcycle Bluetooth Helmet Intercom
- 2 Product installation
- **3 Operation Diagram**
- 4 Power
- 5 Intercom function
- 6 Mobile phone pairing
- 7 Handle EUC (optional)
- 8 Firmware upgrades
- 9 Documents / Resources
- **10 Related Posts**

**V7 Motorcycle Bluetooth Helmet Intercom** 

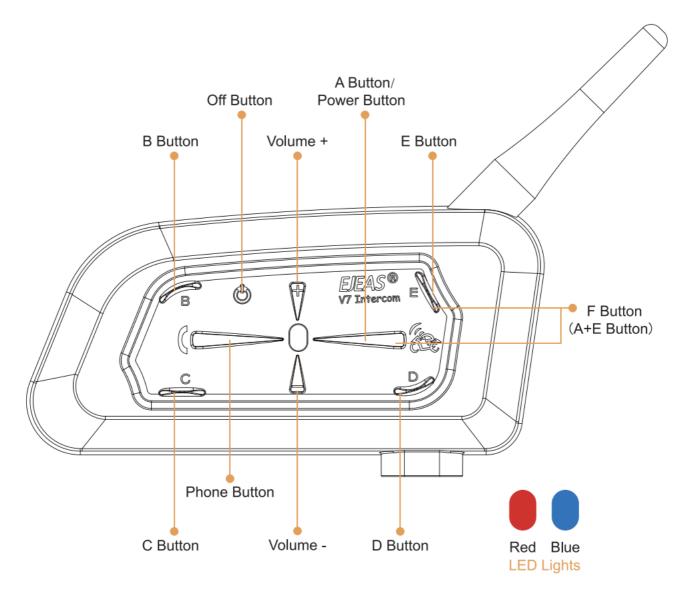


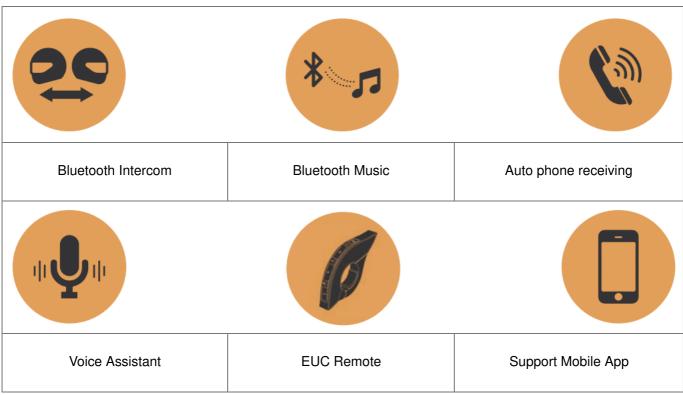

## **Product installation**

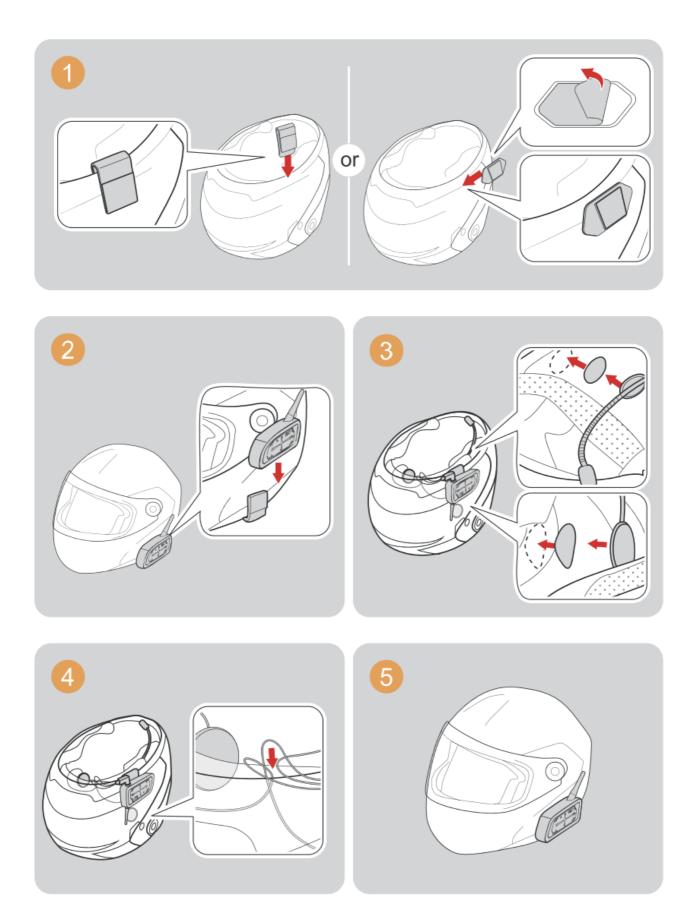


**Operation Diagram** 

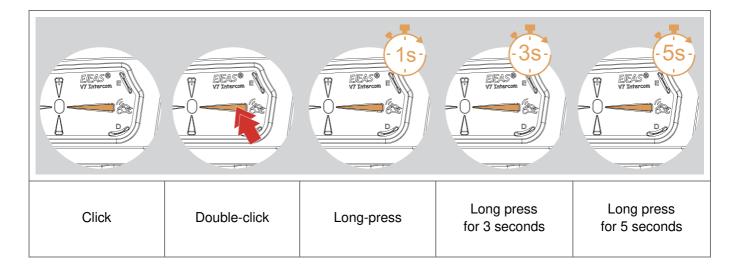


#### **Power**


#### ON/OFF

Please charge it before using

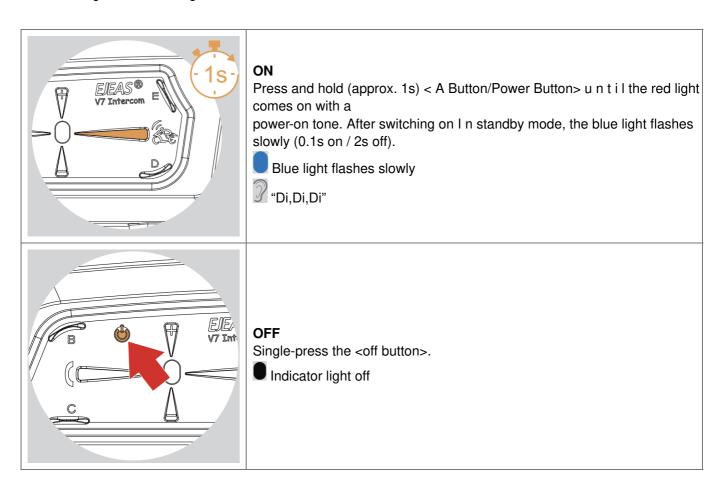




Red light flashes rapidly 3 times when the battery is low. The device auto matically turn off when the battery is ultra-low.




The red light is always on when charging.

## Intercom function

# Intercom pairing

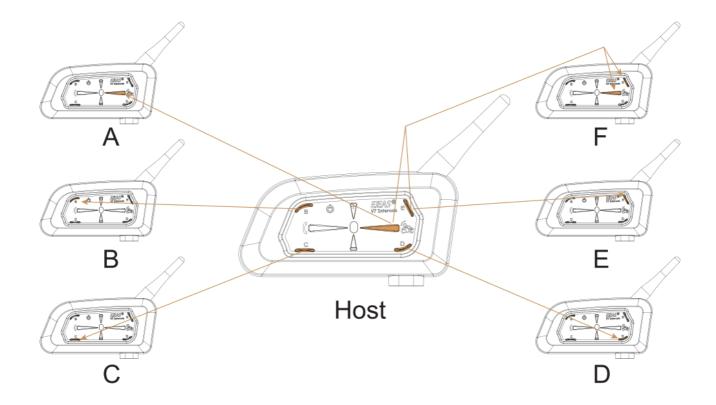



After switching on, press and hold (approx. 5 seconds) <A Button> until the red and blue

lights alternately flash. Wait to connect to another intercom; or long press (about 3s) <A Button>/<B Button >/<C Button >/<D Button>/<E Button>/<A Button+E Button> (Intercom F) until the red and blue lights flash alternately and wait for the connection to another intercom.






The other V7 enters the pairing state using the same operation step, then two V7 would pair with each other.


Blue light flashing fast

Wait a few more moments and you will hear the "Di,Di,Di" tone. At this point you can talk to each other and hear each other's voices. **Compatible with old model pairing steps** 

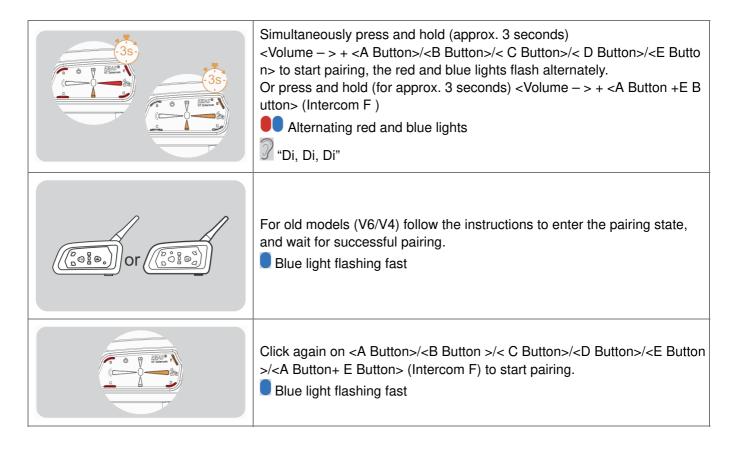

Wait for a successful connection and start the intercom.

#### Intercom connection and disconnection



Once the intercom has been paired, you can click on the corresponding in tercom


button <A Button>/<B Button>/<C Button>/ <D Button>/<E Button>/<A B utton+E Button>

(Intercom F) to connect o r disconnect.

The buttons didn't use for paring would have no reponse when press.


## Mobile phone pairing

This intercom supports connection to mobile phones for playing songs and making calls, and waking up voice assistants. Up to 2 mobile phones can be connected at the same time.



After power on, press and hold (approx. 5s) <phone button> until the red and blue lights flash alternately fast.

Alternating red and blue lights flashing fast



Searches the device "V7" on your phone, click it and get to connect.

## Pairing successful


Blue slow speed double flashing lights





Current battery level is displayed on the Phone's Bluetooth icon (Mobile phone HFP connection required)

## Bluetooth reconnection with mobile phones



After power on, it automatically connects back to the last paired cellphone.


When there is no connection, click <Phone Button> to connect back to the last paired cellphone.

Mobile control
Answering the phone




When a call comes, wait 8s to answer automatically

## Reject the phone



When a call comes, click the <phone button>.

# End the phone




When on the phone, click on <phone button>.

## Last num redial




When in standby/playing music, Press and hold for \_ approx. 2s <phone b utton>

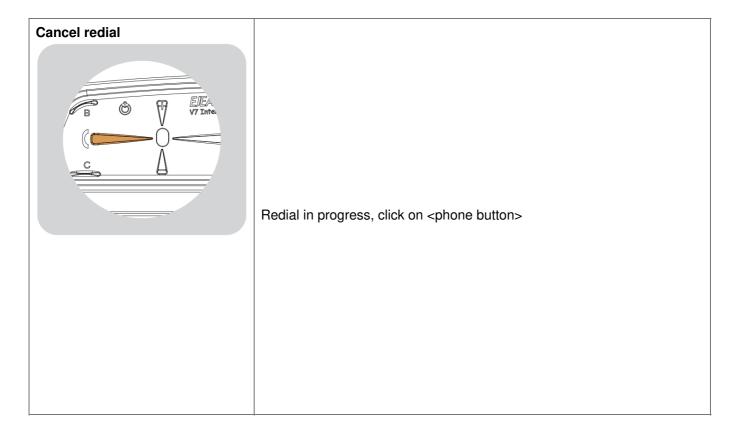


## **Telephone priority**


Interrupts Bluetooth music and intercom when a call comes in, resumes after ending up.

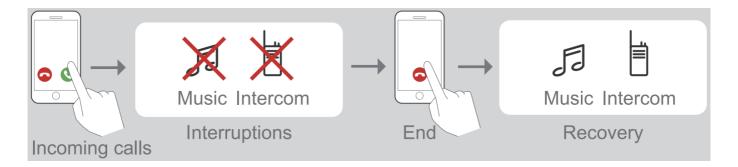


## Voice assistant

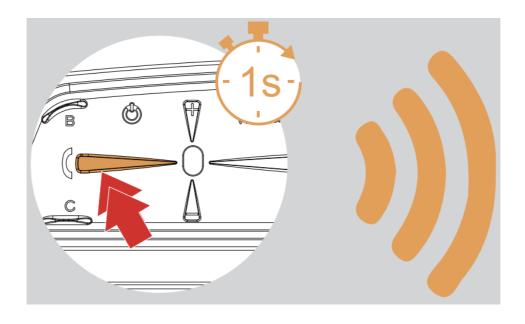

Double-click the <phone button> when in standby or with music.(requires phone support)

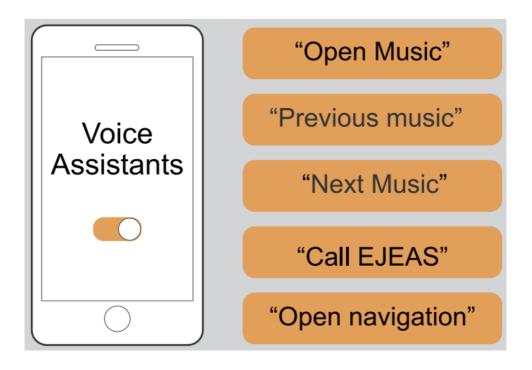


#### **Music control**

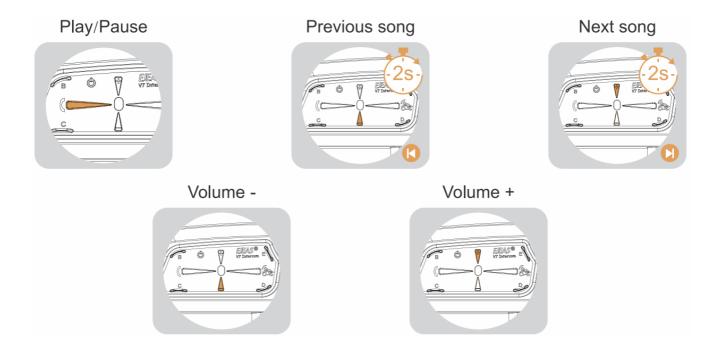

Handle EUC (optional)


**Key descriptions** 

Pushbuttons	Actions	Function	
Volume –	Short press	Volume –	
	Long press	Previous song when music is playing.	
	Double click	None	
Phone Button	Short press	Answer the phone when it comes a call, hang up Music play/paus e When no mobile phone is connected Connect the last connected phone	
	Long press	Reject calls Voice assistant	
	Double click	Last number redial	
Volume +	Short press	Volume +	
	Long press	Next song when music is playing.	
	Double click	None	
Intercom Button A	Short press	Intercom A pairing	
	Long press	Disconnecting the intercom	
	Double click	Intercom D pairing	
Intercom Button B	Short press	Intercom B pairing	
	Long press	Disconnecting the intercom	
	Double click	Intercom E pairing	

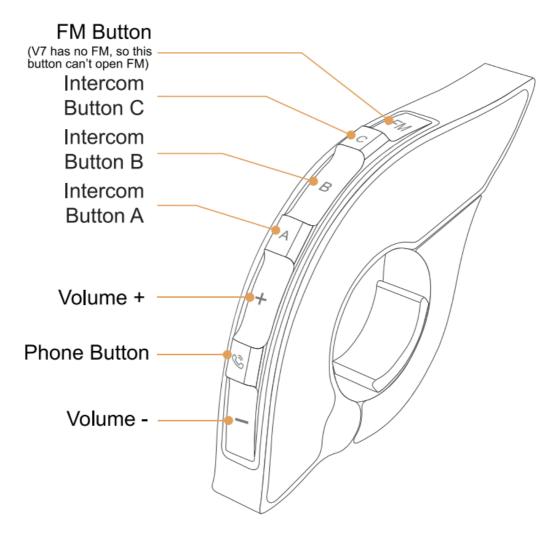

Pushbuttons	Actions	Function
	Short press	Intercom C pairing
Intercom Button C	Long press	Disconnecting the intercom
	Double click	Intercom F pairing
Volume – + Useless key	Super Long Press	Clear handle pairing records


## **EUC** pairing

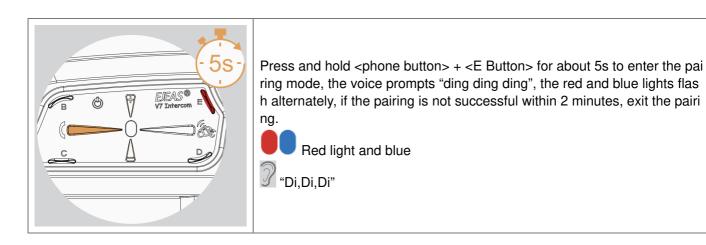


## Pairing Successful?



#### Clear pairing records

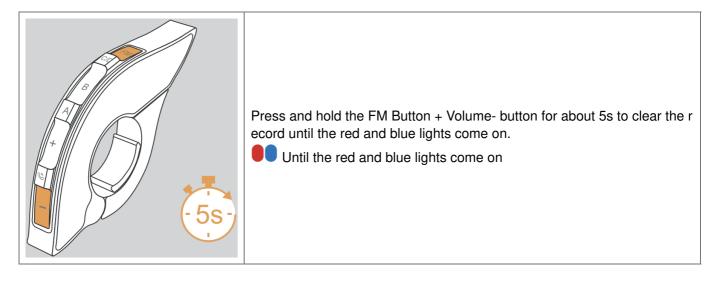

## Firmware upgrades

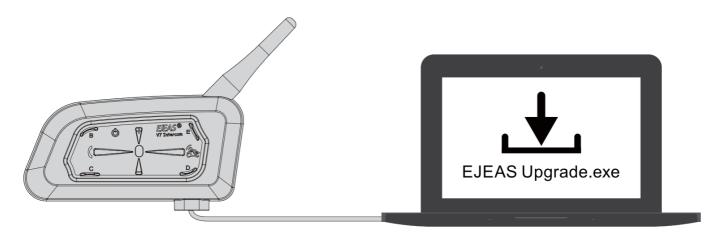

Connect the product to the PC using USB. Download and open the "EJEAS Upgrade.exe" upgrade software. Click on the "Upgrade" button to start the upgrade and wait for the upgrade to complete.

## **Mobile App**

1. First time users download and install EJEAS SafeRiding Mobile App.









https://play.google.com/store/apps/details?id=co m.yscoco.transceiver

- 2. Press and hold (approx. 5s) <phone button> until the red and blue lights flash alternately fast.
  - Alternating red and blue lights flashing fast

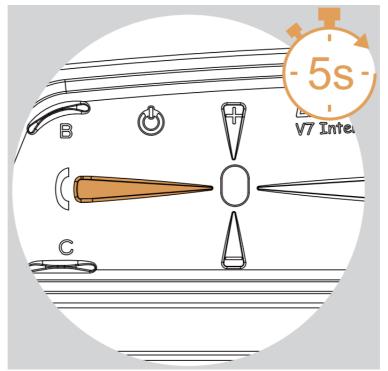


 Open the APP, click on the Bluetooth icon in the top right corner, the interface shows the name of the intercom device searched, select the intercom device to be connected, click to connect.
 (IOS system need to enter the phone pairing again, i n the system settings->Bluetooth, connect audio Bluetooth)

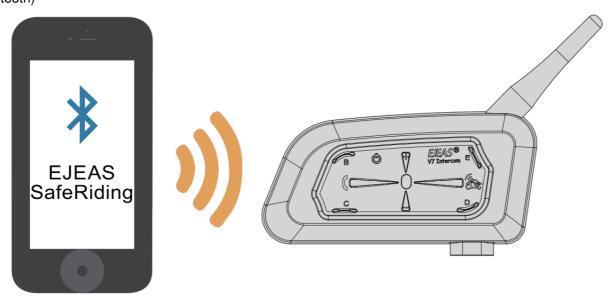

The next time you use the app, open it, click on the Bluetooth icon in the top right corner and click to select Intercom for connection from the paired devices.

APP provides intercom group, music control, FM control, switch off, check authenticity and other functions. **Restore Default Settings** 



Press and hold <Phone button> + <B button> for about 2s, the red light fl ashes 3 times quickly to delete the pairing record, and then the intercom will automatically power on again.

3 Quick Flashes

🅜 "Di,Di,Di"

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### www.ejeas.com

#### **Documents / Resources**



EJEAS V7 Motorcycle Bluetooth Helmet Intercom [pdf] User Manual

V7, 2A9G2-V7, 2A9G2V7, V7 Motorcycle Bluetooth Helmet Intercom, Motorcycle Bluetooth Helmet Intercom, Bluetooth Helmet Intercom, Intercom

Manuals+,