

EPSON EB-L1505U 3LCD Projector



EPSON EB-L1505U 3LCD Projector User Guide

[Home](#) » [Epson](#) » EPSON EB-L1505U 3LCD Projector User Guide 

Contents


- 1 EPSON EB-L1505U 3LCD Projector
- 2 WHAT IN THE BOX
- 3 DIMENSION
- 4 INSTALLATION INSTRUCTION
- 5 Lens Projection Distance Table
- 6 Supported Resolutions
- 7 Documents / Resources
 - 7.1 References

EPSON®









EPSON EB-L1505U 3LCD Projector



WHAT IN THE BOX

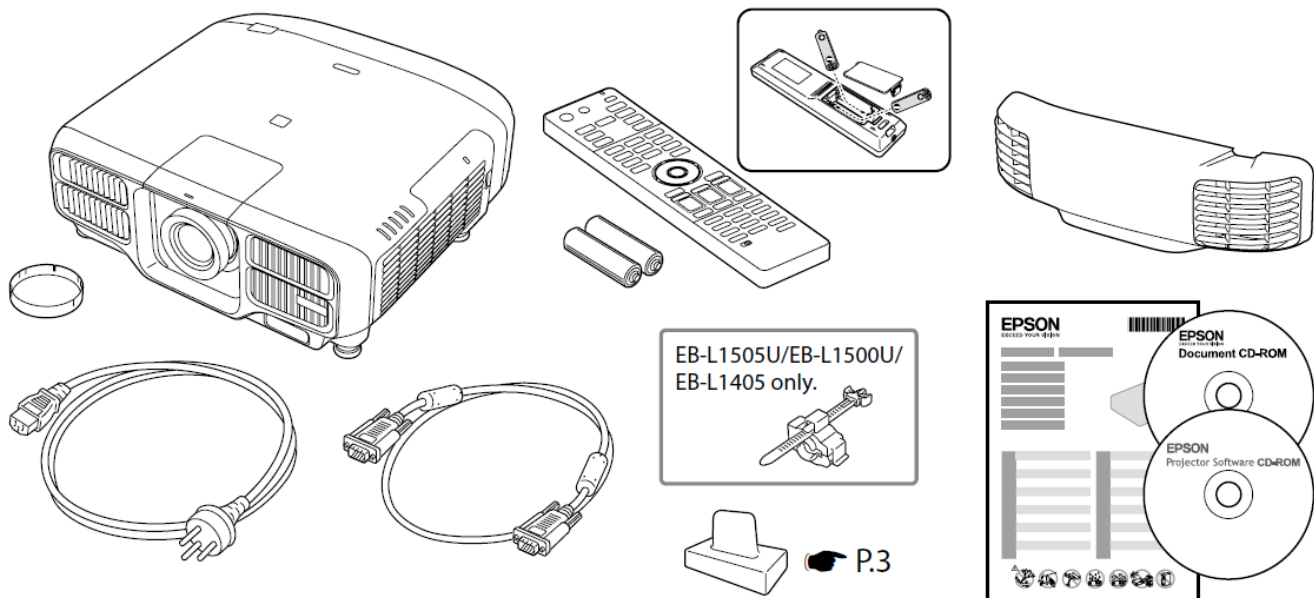


DIMENSION

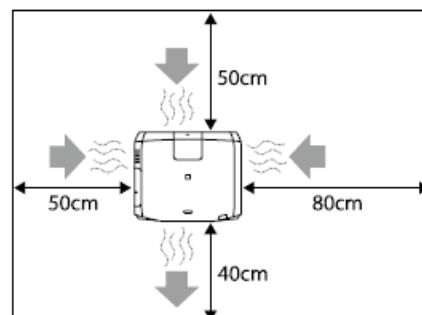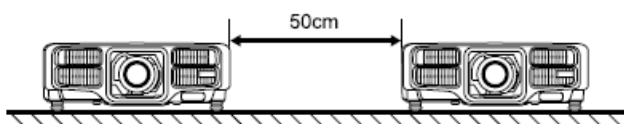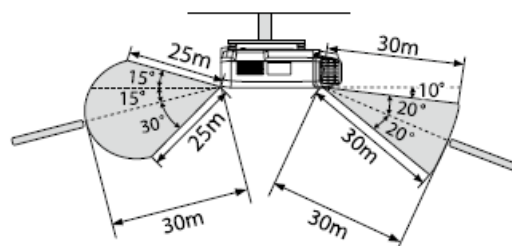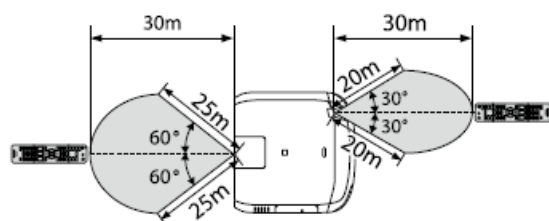


INSTALLATION INSTRUCTION




1

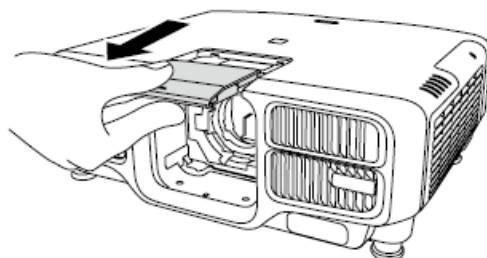


2

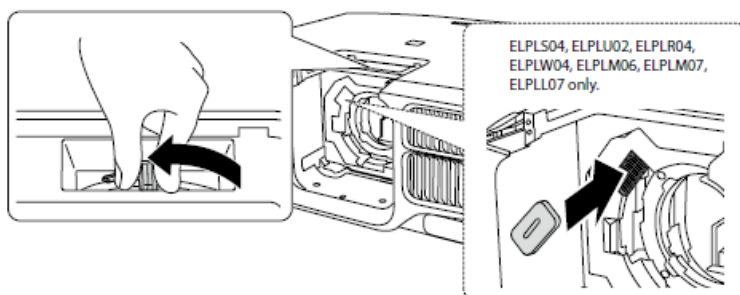


3

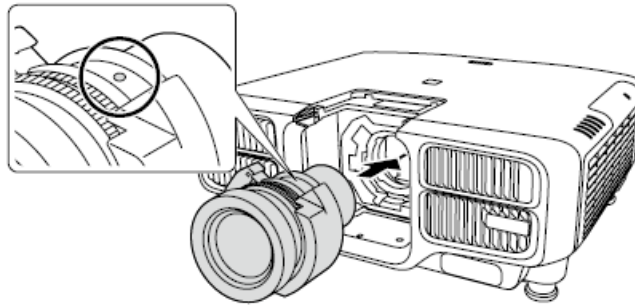

4

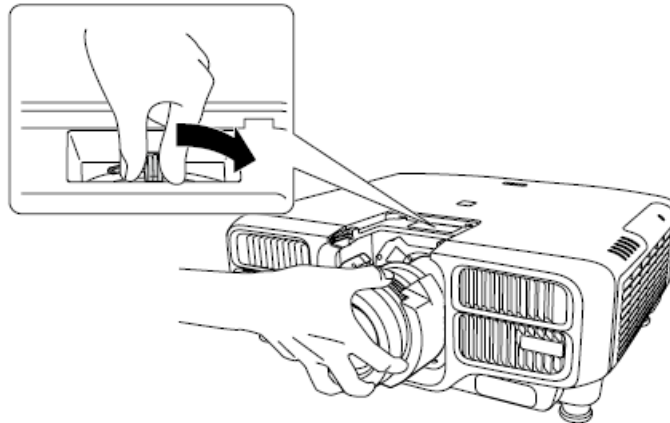

5

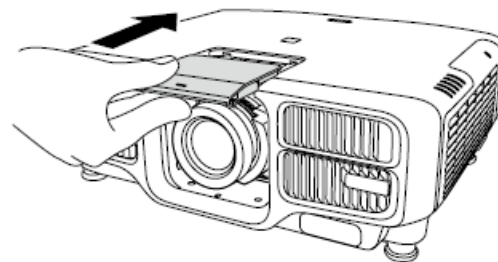

[Lens Calibration]

Starting adjustment. Do you want to continue?

Yes 





No

- After attaching a lens unit that differs from the previous one, a message is displayed when the projector is turned on. Select Yes to calibrate the lens.


Only when using the following lens. ELPLS04, ELPLU02, ELPLR04, ELPLW04, ELPLM06, ELPLM07, ELPLL07



Set the Lens Type in the Configuration menu according to the lens you are using.




- **Extended – Operation – Advanced – Lens Type**

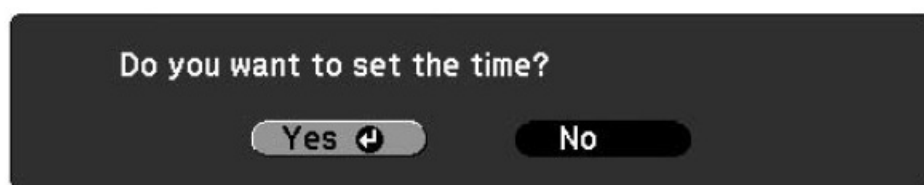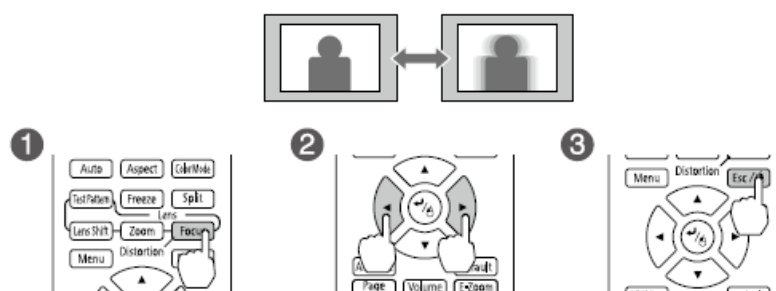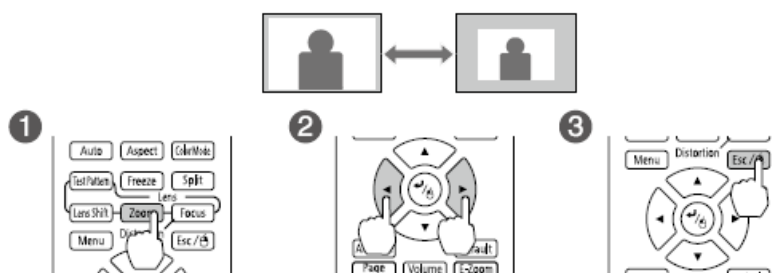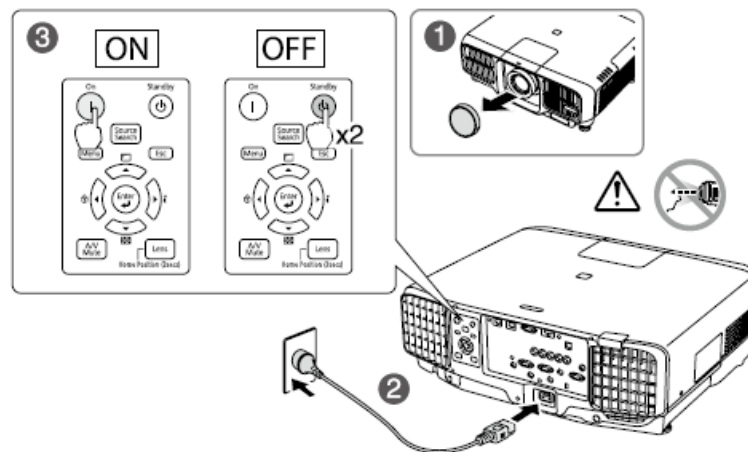


- When you turn on the projector for the first time, the message “Do you want to set the time?” is displayed. Select Yes and set Date/Time. s User’s Guide If you set it later, select No.








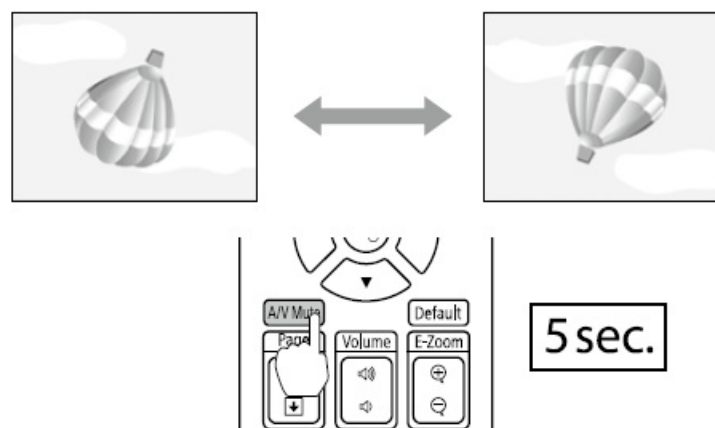


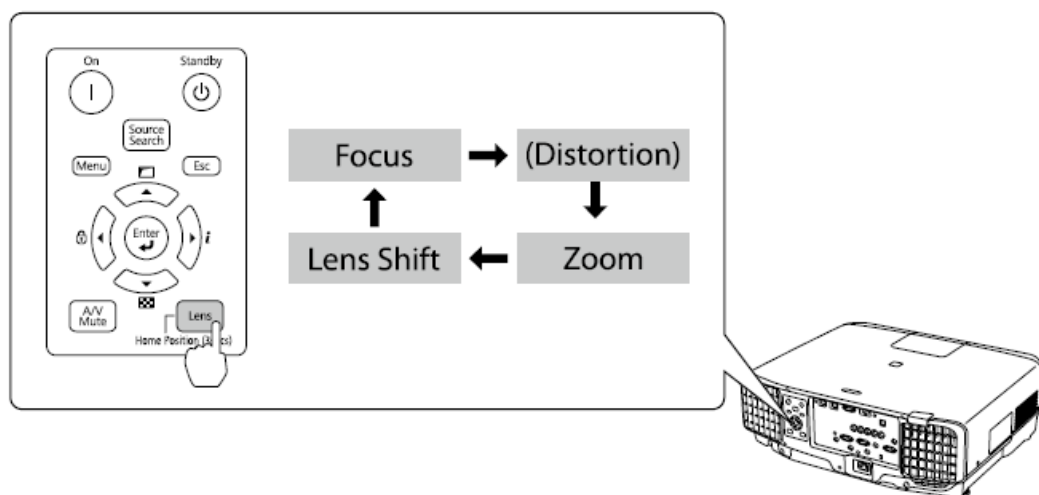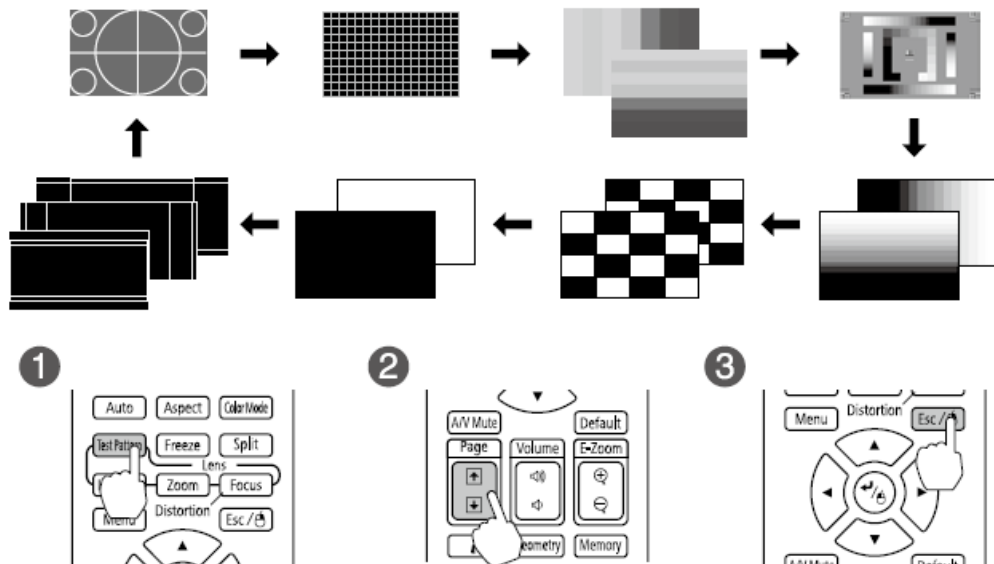


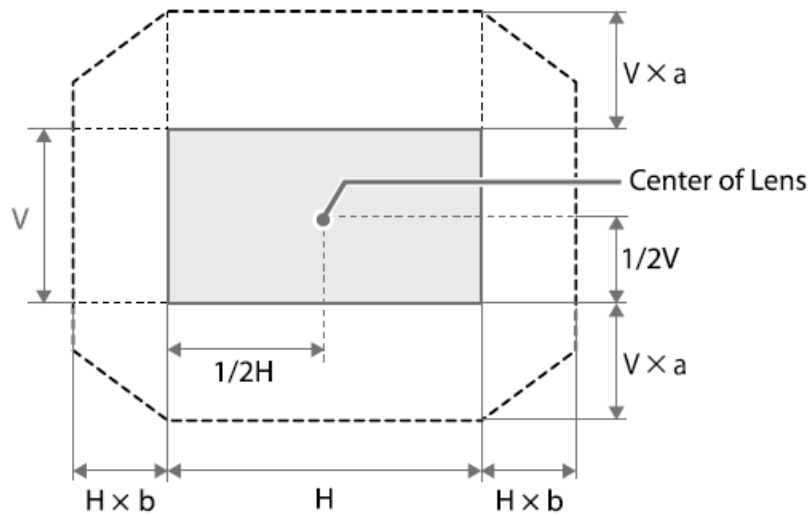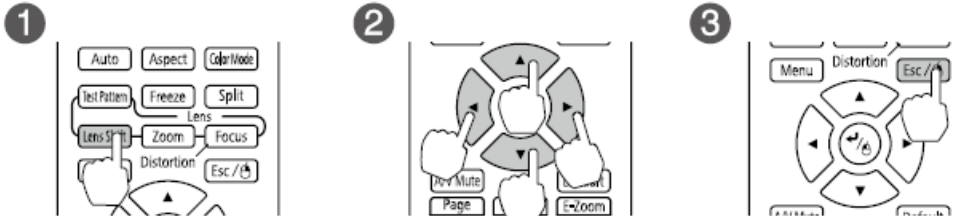


- $a=24\%$, $b=10\%$ (EB-L1505U/EB-L1500U, ELPLU03/ELPLW05)
- $a=60\%$, $b=18\%$ (EB-L1505U/EB-L1500U, ELPLU04/ELPLW06/ELPLM09/ELPLM10/ELPLM11/ELPLL08)
- $a=67\%$, $b=30\%$ (EB-L1405U/EB-L1300U/EB-L1200U/EB-L1100U)

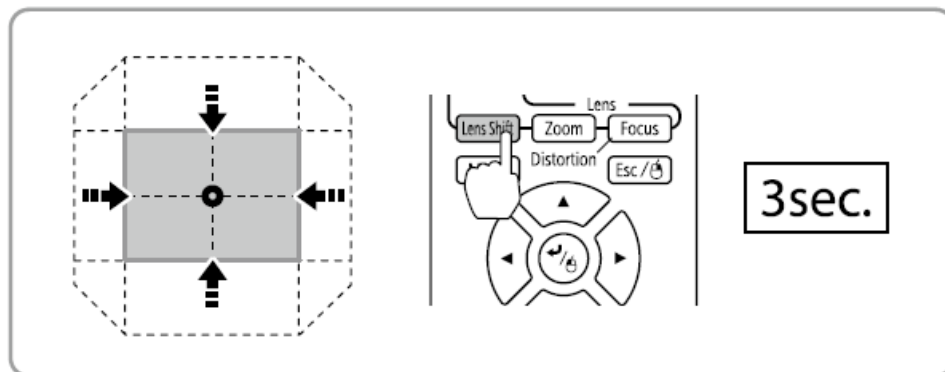

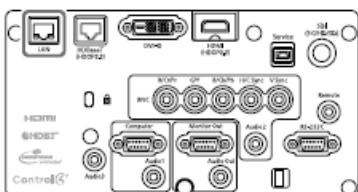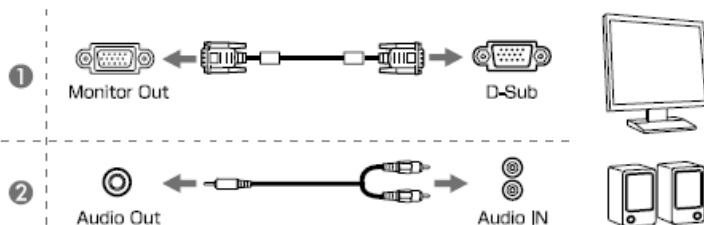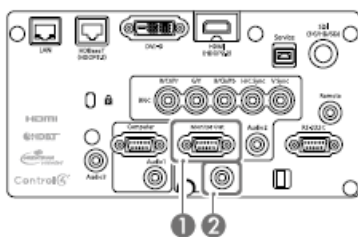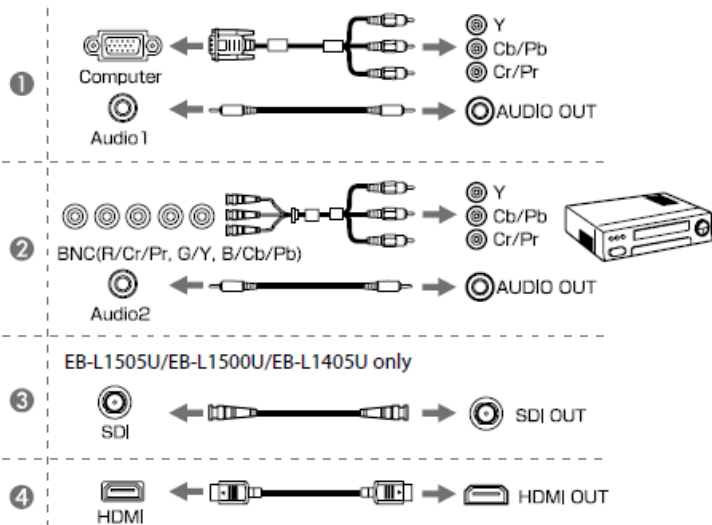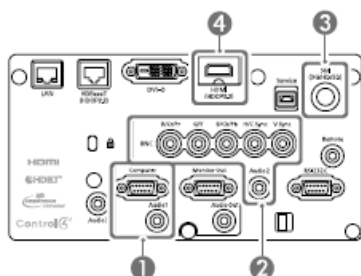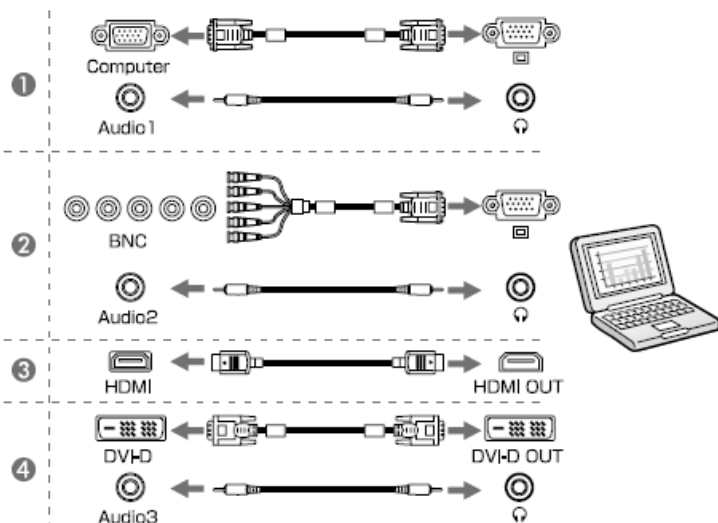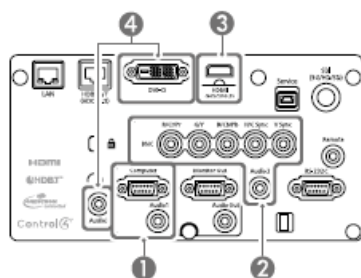


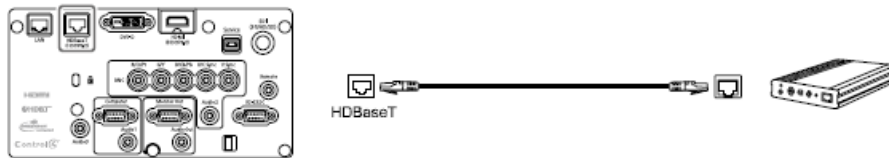


Cable clamp (EB-L1505U/EB-L1500U/EB-L1405U only)

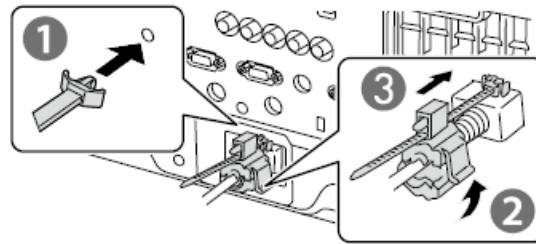


Cable cover

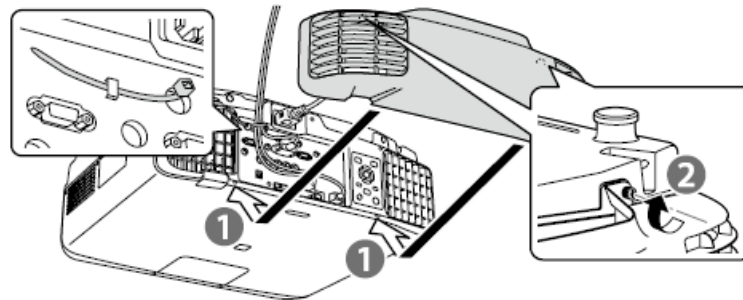

Wireless LAN Unit

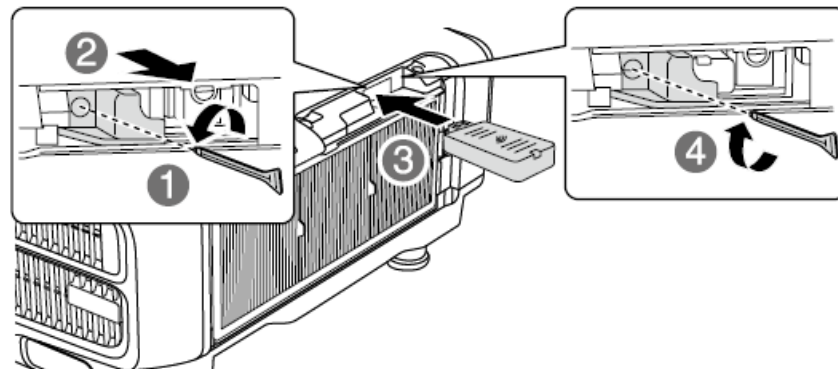

Lens Projection Distance Table

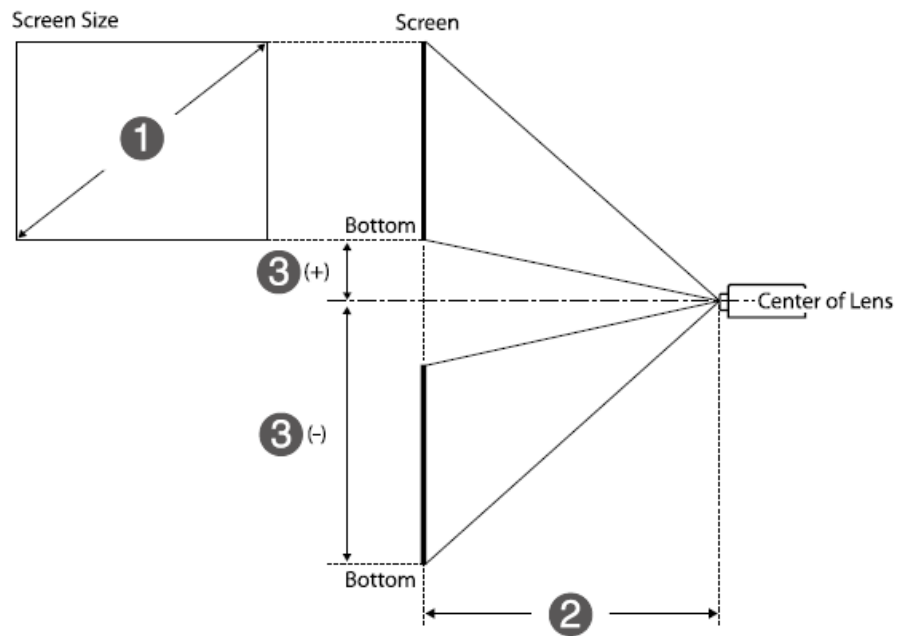

1. Screen size (inches)
2. Projection distance (Minimum: Wide to Maximum: Tele)
3. Distance from the center of the lens to the bottom of the screen

EB-L1505U/EB-L1500U

The lens for projectors with built-in lens is ELPLM09.

16:10

Projection Lens	(cm)		(cm)	
	Minimum	Maximum		
ELPLM09/ELPLS04	x 3.45 – 8.18	x 5.57 – 8.02	(+) (-)	x 0.14 x 1.48
ELPLU03	x 1.05 – 3.49	x 1.26 – 3.28	(-) (-)	x 0.35 x 1.00
ELPLU04	x 1.42 – 5.65	x 1.71 – 5.52	(+) (-)	x 0.14 x 1.48
ELPLW05	x 1.70 – 7.86	x 2.35 – 5.80	(-) (-)	x 0.35 x 1.00
ELPLW06/ELPLW04	x 2.61 – 7.51	x 3.55 – 6.99		
ELPLM10/ELPLM06	x 5.33 – 13.21	x 8.10 – 13.08	(+)	x 0.14
ELPLM11/ELPLM07	x 7.81 – 23.86	x 11.83 – 23.55	(-)	x 1.48
ELPLL08/ELPLL07	x 11.59 – 31.52	x 16.21 – 31.81		
ELPLR04	x 1.56 – 6.62		—	

Projection Lens	(cm)		(cm)	
	Minimum	Maximum		
ELPLM09/ELPLS04	x 3.55 – 8.18	x 5.73 – 8.02	(+) (-)	x 0.21 x 1.45
ELPLU03	x 1.08 – 3.49	x 1.29 – 3.28	(-) (-)	x 0.29 x 0.96
ELPLU04	x 1.46 – 5.65	x 1.76 – 5.52	(+) (-)	x 0.21 x 1.45
ELPLW05	x 1.75 – 7.86	x 2.42 – 5.80	(-) (-)	x 0.29 x 0.96
ELPLW06/ELPLW04	x 2.69 – 7.51	x 3.65 – 6.99		
ELPLM10/ELPLM06	x 5.47 – 13.21	x 8.32 – 13.08	(+)	x 0.21
ELPLM11/ELPLM07	x 8.03 – 23.86	x 12.16 – 23.55	(-)	x 1.45
ELPLL08/ELPLL07	x 11.92 – 31.52	x 16.66 – 31.81		
ELPLR04	x 1.60 – 6.62		—	

EB-L1405U/EB-L1300U/EB-L1200U/EB-L1100U

The lens for projectors with built-in lens is ELPLM08.

16:10

Projection Lens	(cm)		(cm)
	Minimum	Maximum	
ELPLM08	x 3.16 – 5.00	x 5.05 – 4.49	(+) = x 0.24 (-) = x 1.58
ELPLU03	x 1.44 – 3.77	x 1.72 – 3.63	
ELPLU04/ELPLU02	x 1.94 – 5.72	x 2.33 – 5.68	
ELPLW05	x 2.32 – 7.65	x 3.21 – 5.81	
ELPLW06/ELPLW04	x 3.58 – 7.32	x 4.87 – 8.32	
ELPLM09/ELPLS04	x 4.73 – 8.00	x 7.59 – 7.93	
ELPLM10/ELPLM06	x 7.30 – 13.04	x 11.03 – 13.01	
ELPLM11/ELPLM07	x 10.70 – 23.67	x 16.14 – 23.47	
ELPLL08/ELPLL07	x 15.87 – 31.85	x 22.11 – 31.62	
ELPLR04	x 2.12 – 6.10		–

16:9

Projection Lens	(cm)		(cm)
	Minimum	Maximum	
ELPLM08	x 3.25 – 5.00	x 5.19 – 4.49	(+) = x 0.31 (-) = x 1.56
ELPLU03	x 1.48 – 3.77	x 1.77 – 3.63	
ELPLU04/ELPLU02	x 1.99 – 5.72	x 2.39 – 5.68	
ELPLW05	x 2.39 – 7.65	x 3.30 – 5.81	
ELPLW06/ELPLW04	x 3.68 – 7.32	x 5.00 – 8.32	
ELPLM09/ELPLS04	x 4.86 – 8.00	x 7.80 – 7.93	
ELPLM10/ELPLM06	x 7.50 – 13.04	x 11.34 – 13.01	
ELPLM11/ELPLM07	x 11.00 – 23.67	x 16.59 – 23.47	
ELPLL08/ELPLL07	x 16.31 – 31.85	x 22.73 – 31.62	
ELPLR04	x 2.18 – 6.10		–

Supported Resolutions

Computer signals (analog RGB)

Signal	Refresh Rate (Hz)	Resolution (Dots)
VGA	60/72/75/85	640×480
SVGA	60/72/75/85	800×600
XGA	60/70/75/85	1024×768
WXGA	60	1280×768
	60	1366×768
	60/75/85	1280×800
WXGA+	60/75/85	1440×900
WXGA++	60	1600×900
SXGA	70/75/85	1152×864
	60/75/85	1280×1024
	60/75/85	1280×960
SXGA+	60/75	1400×1050
WSXGA+* ¹	60	1680×1050
UXGA	60	1600×1200
WUXGA* ²	60	1920×1200

1. Only compatible when Wide is selected as the Resolution from the Configuration menu.
2. Only compatible when VESA CVT-RB (Reduced Blanking) signal is input.

Component Video

Signal	Refresh Rate (Hz)	Resolution (Dots)
SDTV (480i)	60	720×480
SDTV (576i)	50	720×576
SDTV (480p)	60	720×480
SDTV (576p)	50	720×576
HDTV (720p)	50/60	1280×720
HDTV (1080i)	50/60	1920×1080
HDTV (1080p)*	50/60	1920×1080

- Only for the input signals from the Computer port.

DVI-D/HDMI/HDBaseT

Signal	Refresh Rate (Hz)	Resolution (Dots)
VGA	60	640×480
SVGA	60	800×600
XGA	60	1024×768
WXGA	60	1280×800
	60	1366×768
WXGA+	60	1440×900
WXGA++	60	1600×900
WSXGA+	60	1680×1050
SXGA	60	1280×960
	60	1280×1024
SXGA+	60	1400×1050
UXGA	60	1600×1200
WUXGA*1	60	1920×1200
QXGA*2	60	2048×1536
WQHD*2	60	2560×1440
WQXGA*1, 2	60	2560×1600
SDTV (480i/480p)	60	720×480
SDTV (576i/576p)	50	720×576
HDTV (720p)	50/60	1280×720
HDTV (1080i)	50/60	1920×1080
HDTV (1080p)	24/30/50/60	1920×1080


4Kx2K*2	24/25/30/50/60	3840×2160
4Kx2K (SMPTE)*2	24/50/60	4096×2160

1. Only compatible when VESA CVT-RB (Reduced Blanking) signal is input.
2. Only for the input signals from the HDMI and HDBase-T ports.

SDI

Signal	Refresh Rate (Hz)	Resolution (Dots)	Mode	Color difference signals	Number of Bits	Level
SDTV (480i)	59.94	720×480	SD-SDI	YPbPr 4:2:2	10 bits	—
SDTV (576i)	50	720×576				
HDTV (720p)	50/59.94/60	1280×720	HD-SDI			
HDTV (1080i)	50/59.94/60	1920×1080				
HDTV (1080p)	23.98/24/25/29.97/30	1920×1080				
HDTV (1080p)	50/59.94/60	1920×1080	3G-SDI			A

- EB-L1505U/EB-L1500U/EB-L1405U only.

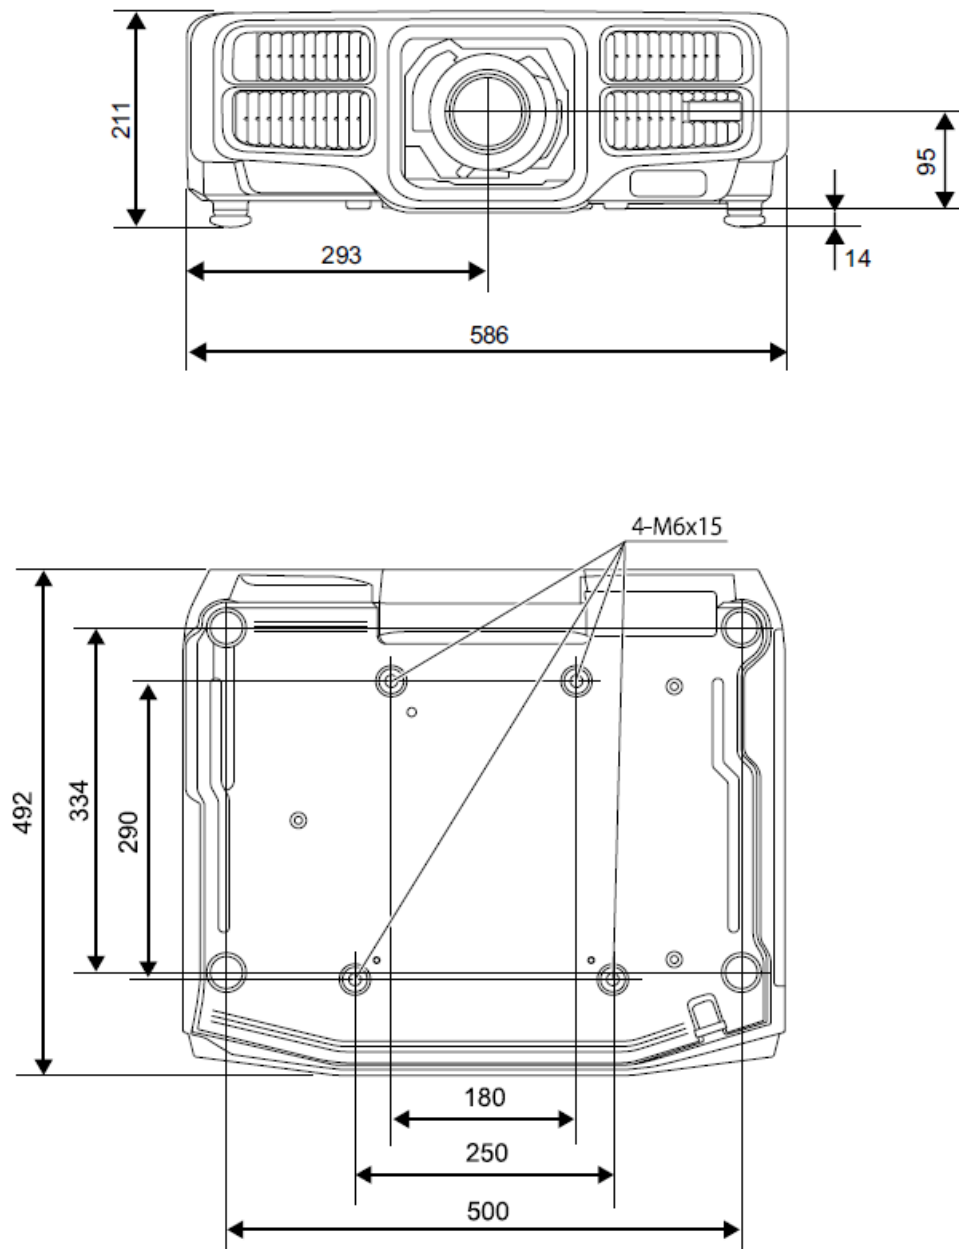

Documents / Resources

EPSON MULTIMEDIA PROJECTOR Multimedia Projector EB-L1505U EB-L1505U EB-L1505U EB-L1505U EB-L1505U  <table border="1"> <tr> <td>Product Name</td> <td>EB-L1505U</td> </tr> <tr> <td>Product Type</td> <td>3LCD Projector</td> </tr> <tr> <td>Resolution</td> <td>1024 x 768</td> </tr> <tr> <td>Brightness</td> <td>15000</td> </tr> <tr> <td>Contrast</td> <td>10000</td> </tr> <tr> <td>Throw Ratio</td> <td>1.2-1.6</td> </tr> <tr> <td>Screen Size</td> <td>30-300"</td> </tr> <tr> <td>Weight</td> <td>12.5kg</td> </tr> <tr> <td>Dimensions</td> <td>211 x 586 x 95mm</td> </tr> <tr> <td>Power</td> <td>150W</td> </tr> <tr> <td>Warranty</td> <td>3 Years</td> </tr> </table>	Product Name	EB-L1505U	Product Type	3LCD Projector	Resolution	1024 x 768	Brightness	15000	Contrast	10000	Throw Ratio	1.2-1.6	Screen Size	30-300"	Weight	12.5kg	Dimensions	211 x 586 x 95mm	Power	150W	Warranty	3 Years	EPSON EB-L1505U 3LCD Projector [pdf] User Guide EB-L1505U 3LCD Projector, EB-L1505U, 3LCD Projector, Projector
Product Name	EB-L1505U																						
Product Type	3LCD Projector																						
Resolution	1024 x 768																						
Brightness	15000																						
Contrast	10000																						
Throw Ratio	1.2-1.6																						
Screen Size	30-300"																						
Weight	12.5kg																						
Dimensions	211 x 586 x 95mm																						
Power	150W																						
Warranty	3 Years																						

References

-  [Manual-Hub.com](https://www.manual-hub.com) - Free PDF manuals!

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.