

EPSON EB-X350 Multi Data Projector



EPSON EB-X350 Multi Data Projector User Manual

[Home](#) » [Epson](#) » EPSON EB-X350 Multi Data Projector User Manual 

Contents

- 1 EPSON EB-X350 Multi Data Projector
- 2 Product Information
- 3 What In The Box
- 4 Connections And Using Instructions
- 5 Projection Distance Table
- 6 Precautions
- 7 Documents / Resources
 - 7.1 References

EPSON®

EPSON EB-X350 Multi Data Projector



Product Information



Specifications

- **Product:** Projector
- **Model:** EB-U32/U04/U130, EB-W32/W31/W04/W130, EB-X36, EB-X31/X04/X130/X350/X300, EB-S31/S04/S130/S300
- **Aspect Ratio:** 4:3 XGA, 16:9 Widescreen
- **Projection Distance Table:**
 - **EB-U32/U04/U130:**
 - A27A: 60cm, 80cm, 100cm, 150cm, 260cm
 - A29A: 60cm, 80cm, 100cm, 150cm, 280cm
 - **EB-W32/W31/W04/W130:**
 - A29A: 60cm, 80cm, 100cm, 150cm, 280cm
 - A30A: 60cm, 80cm, 100cm, 150cm, 300cm
 - **EB-X36:**
 - A30A: 60cm, 80cm, 100cm, 150cm, 300cm
 - **EB-X31/X04/X130/X350/X300:**
 - A30A: 60cm, 80cm, 100cm, 150cm, 300cm
 - **EB-S31/S04/S130/S300:**
 - A30A: 60cm, 80cm, 100cm, 150cm, 200cm

Frequently Asked Questions

- **Q:** How do I change the input source on the projector?
 - **A:** To change the input source, use the “Input” or “Source” button on the projector or its remote control. Press the button repeatedly until you reach the desired input source.
- **Q:** Can I connect multiple devices to the projector simultaneously?
 - **A:** Yes, you can connect multiple devices to the projector by using different input ports. Simply connect each device to a separate port and switch between them using the input source selection.
- **Q:** How do I adjust the focus of the projected image?
 - **A:** To adjust the focus, locate the focus ring on the projector lens. Rotate the ring clockwise or counterclockwise until the projected image appears clear and sharp.



What In The Box

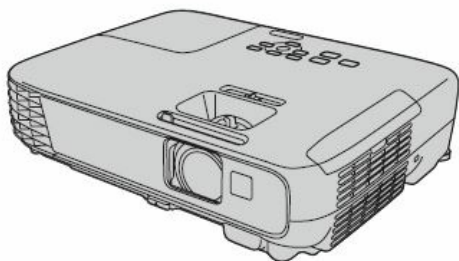

1



EB-U32/W32/W31/X36
/X31/S31 only

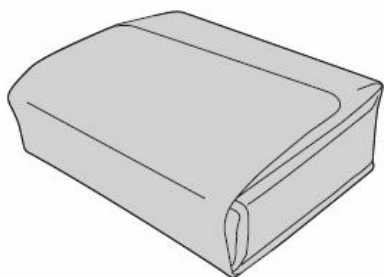


EB-W31/X36/X31/S31/W04
/X04/S04/W130/X130/S130
/X350/X300/S300 only






EB-W130/X130 only




Connections And Using Instructions


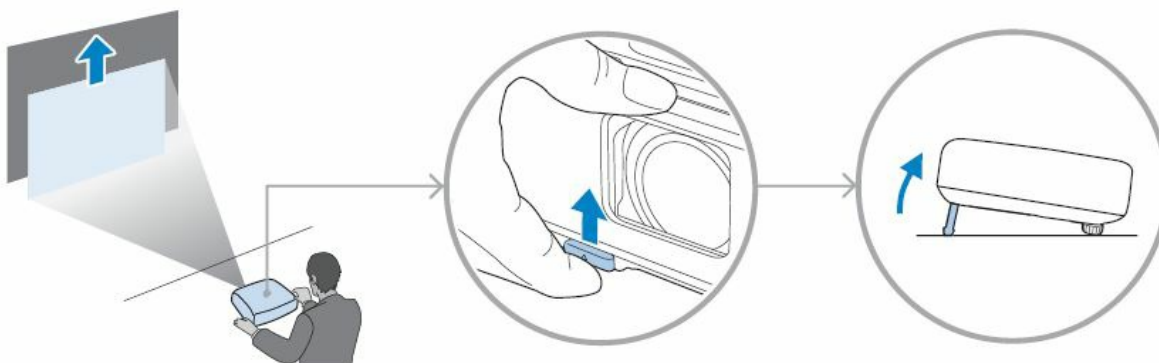


2

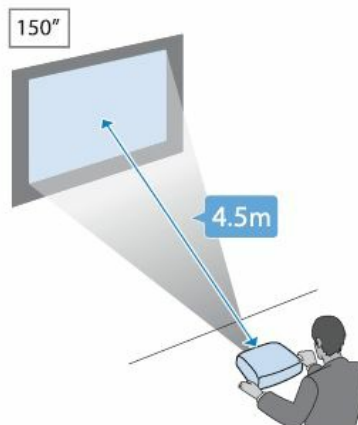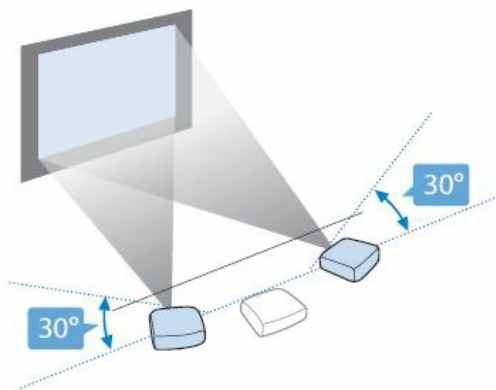


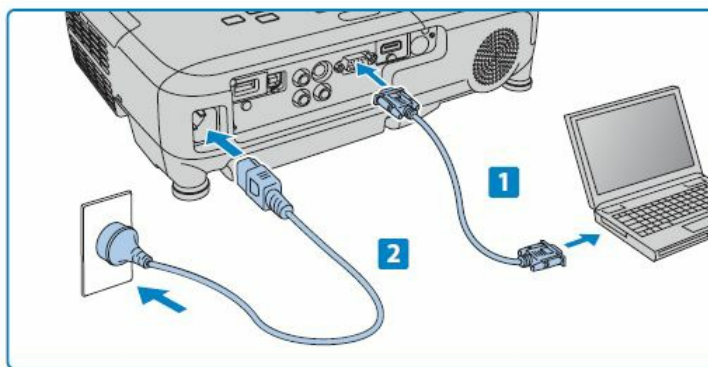


3

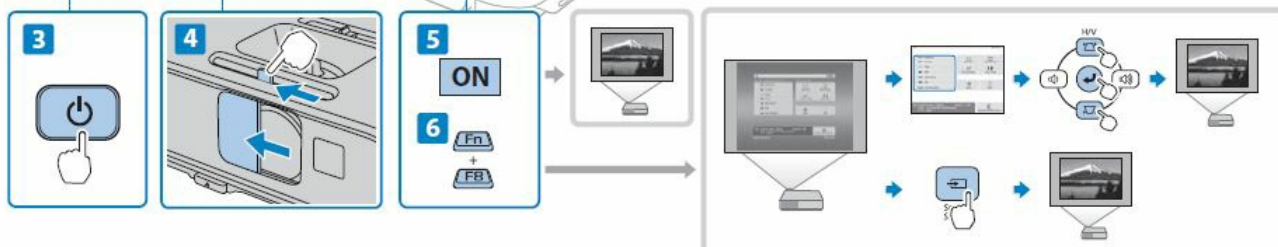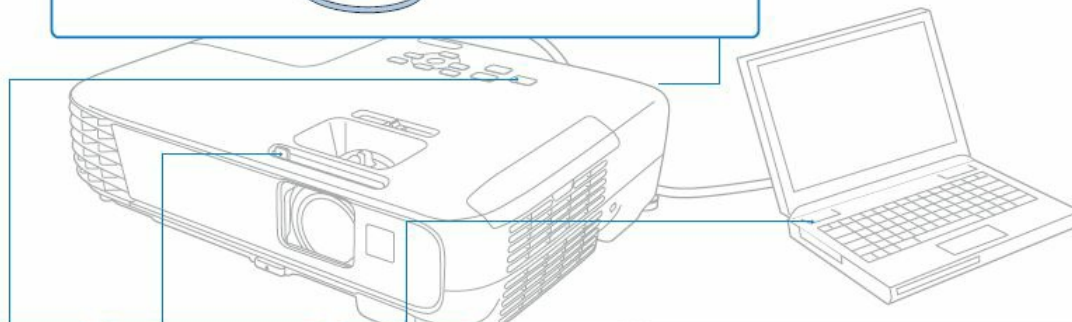


EB-U32/W32/W31/X36/X31/U04
/W04/X04/U130/W130/X130
/X350/X300




EB-S31/S04/S130/S300



EB-U32/W32/W31/X36/X31/U04
/W04/X04/U130/W130/X130
/X350/X300




EB-S31/S04/S130/S300




4





5 Sec.



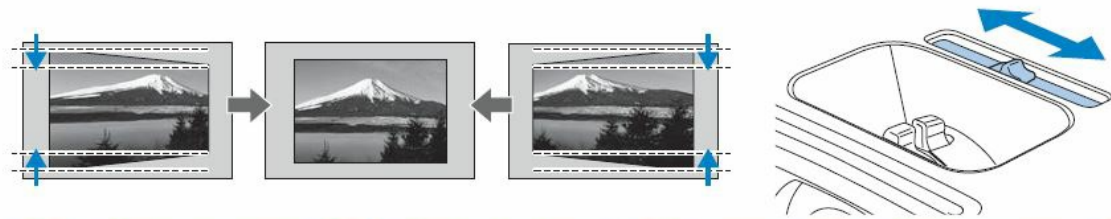


5

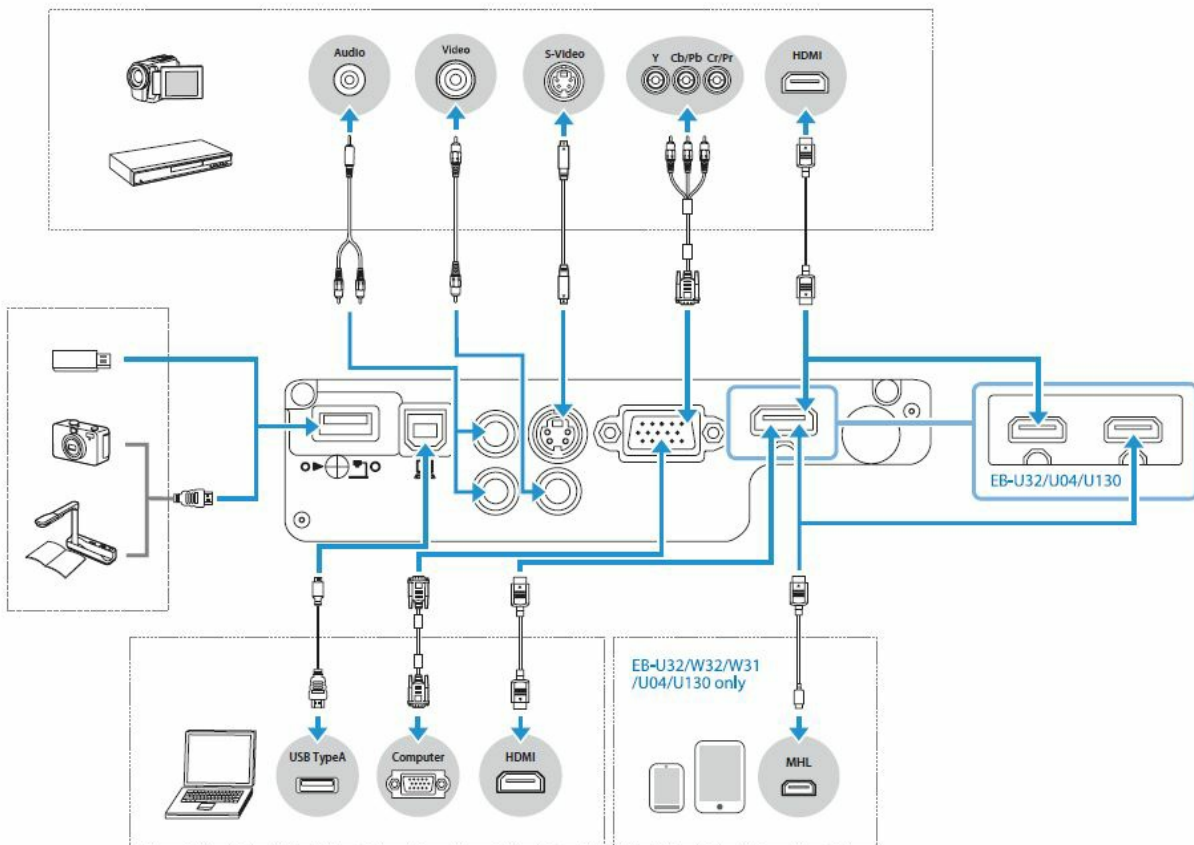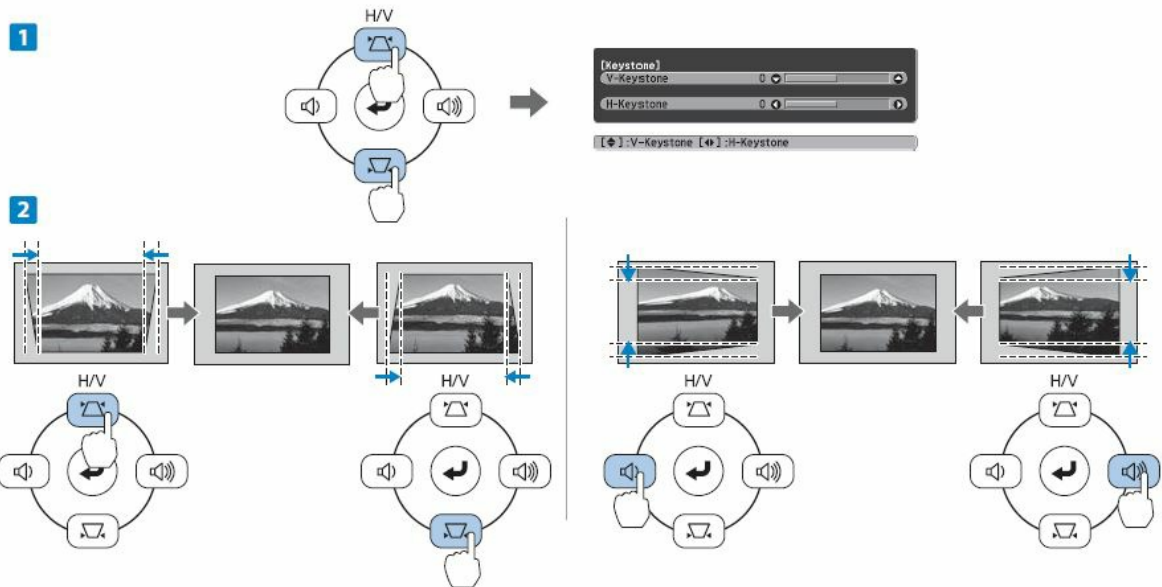

6

Projection Distance Table

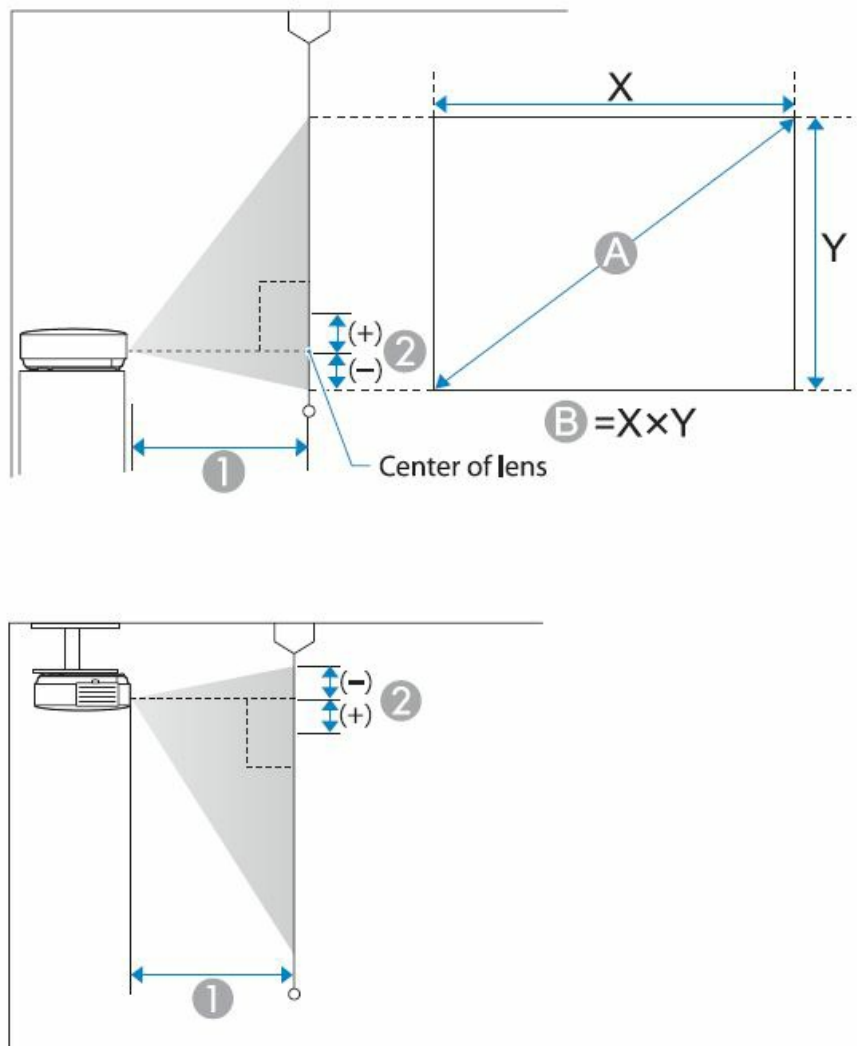

EB-U32/U04/U130

Units: cm

4:3 XGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
27"	55 x 41	89 – 109	-4
60"	122 x 91	202 – 246	-8
80"	163 x 122	270 – 329	-11
100"	203 x 152	339 – 412	-14
150"	305 x 229	509 – 620	-21
260"	528 x 396	885 – 1078	-36

16:9 Widescreen			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
30"	66 x 37	90 – 110	-2
60"	133 x 75	183 – 223	-3
80"	177 x 100	245 – 299	-5
100"	221 x 125	307 – 374	-6
150"	332 x 187	462 – 563	-8
290"	642 x 361	897 – 1091	-16

16:10 WXGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
30"	65 x 40	87 – 107	-4
60"	129 x 81	178 – 217	-7
80"	172 x 108	238 – 291	-10
100"	215 x 135	299 – 364	-12
150"	323 x 202	450 – 548	-18
300"	646 x 404	902 – 1098	-37

EB-W32/W31/W04/W130

Units: cm

4:3 XGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
29"	59 x 44	90 – 109	-4
60"	122 x 91	190 – 229	-8
80"	163 x 122	255 – 306	-11
100"	203 x 152	319 – 383	-14
150"	305 x 229	480 – 577	-20
280"	569 x 427	898 – 1079	-38

16:9 Widescreen			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
32"	71 x 40	91 – 109	-2
60"	133 x 75	172 – 208	-3
80"	177 x 100	231 – 278	-4
100"	221 x 125	289 – 348	-5
150"	332 x 187	435 – 523	-8
310"	686 x 386	903 – 1084	-17

16:10 WXGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
33"	71 x 44	91 – 110	-4
60"	129 x 81	168 – 202	-7
80"	172 x 108	225 – 270	-10
100"	215 x 135	281 – 338	-12
150"	323 x 202	424 – 509	-18
320"	689 x 431	907 – 1089	-39

EB-X36

Units: cm

4:3 XGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
30"	61 x 46	84 – 101	-5
60"	122 x 91	171 – 206	-10
80"	163 x 122	229 – 275	-13
100"	203 x 152	287 – 345	-16
150"	305 x 229	432 – 519	-24
300"	610 x 457	867 – 1041	-48

16:9 Widescreen			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
28"	62 x 35	85 – 103	1
60"	133 x 75	186 – 224	2
80"	177 x 100	249 – 300	3
100"	221 x 125	313 – 376	3
150"	332 x 187	471 – 566	5
275"	609 x 342	866 – 1040	10

EB-X31/X04/X130/X350/X300

Units: cm

4:3 XGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
30"	61 x 46	89 – 107	-5
60"	122 x 91	180 – 217	-10
80"	163 x 122	241 – 290	-14
100"	203 x 152	302 – 363	-17
150"	305 x 229	454 – 546	-25
300"	610 x 457	912 – 1095	-51

16:9 Widescreen			
A	B	1 Minimum (Wide) to Maximum(Tele)	2
28"	62 x 35	90 – 109	1
60"	133 x 75	196 – 236	1
80"	177 x 100	263 – 316	2
100"	221 x 125	329 – 396	2
150"	332 x 187	495 – 595	3
275"	609 x 342	910 – 1093	6

EB-S31/S04/S130/S300


Units: cm

4:3 XGA			
A	B	1 Minimum (Wide) to Maximum(Tele)	2 Minimum (Wide)
30"	61 x 46	88 – 119	-5
60"	122 x 91	177 – 240	-10
80"	163 x 122	237 – 321	-13
100"	203 x 152	297 – 401	-17
150"	305 x 229	446 – 603	-25
200"	406 x 305	595 – 805	-33

16:9 Widescreen

A	B	1 Minimum (Wide) to Maximum (Tele)	2 Minimum (Wide)
28"	62 x 35	89 – 121	1
60"	133 x 75	193 – 262	2
80"	177 x 100	258 – 349	2
100"	221 x 125	323 – 437	3
150"	332 x 187	486 – 657	4
200"	443 x 249	649 – 877	5

Info

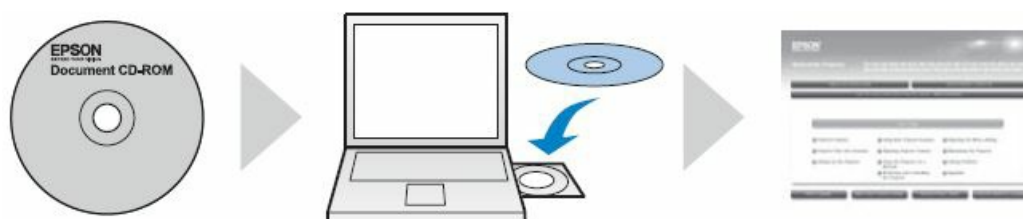

Precautions



Printed in China
XX.XX-XX(XXX)



412877800

Documents / Resources

	EPSON EB-X350 Multi Data Projector [pdf] User Manual EB-X350 Multi Data Projector, EB-X350, Multi Data Projector, Data Projector, Projector
---	--

References

-  [Manual-Hub.com - Free PDF manuals!](#)
- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.