



ERMENRICH Zing CT30 Auto Tester User Manual

Home » ERMENRICH » ERMENRICH Zing CT30 Auto Tester User Manual



Contents


- 1 ERMENRICH Zing CT30 Auto
- **Tester**
- **2 OVERVIEW**
- 3 Getting started
- 4 Usage
- **5 Specifications**
- 6 Care and maintenance
- 7 Battery safety instructions
- 8 Warranty
- 9 FAQ
- **10 CONTACT**
- 11 Documents / Resources
 - 11.1 References
- **12 Related Posts**



ERMENRICH Zing CT30 Auto Tester



OVERVIEW

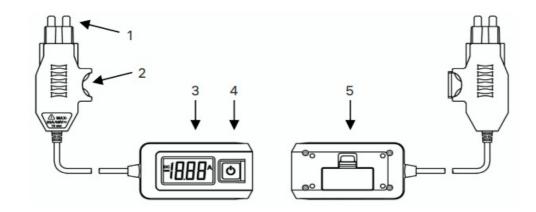

- 1. Plug
- 2. Fuse jack
- 3. Display
- 4. Power button
- 5. Battery compartment

Please carefully read the safety instructions and the user manual before using this product. Keep away from children. Use the device only as specified in the user manual.

Getting started

Open the battery compartment cover and insert a 12V 23A battery. Close the cover.

Usage

- Switch the ignition of the vehicle off.
- The device comes with a blade fuse. Take it out of the fuse jack (2).
- Remove the vehicle's fuse from the circuit and insert it into the fuse jack (2) to provide the necessary level of

circuit protection.

- Insert the plug (1) into the vehicle fuse socket.
- Switch the ignition on to energize the circuit, if necessary. Press (4) to turn the device on. The measured value will be shown on the screen. Press (4) again to turn the device off.
- When the low battery icon () appears on the screen, please replace the battery.

Specifications

Measuring range of current	0.01–19.99A
Max. load	20A / 48V DC
Fuse type	standard
Max. test time	10 seconds
Operating temperature range	0 +40°C (operating), -10 +50°C (storage) / +32 104°F (operating), +14 122°F (storage)
Power supply	1pc 12V 23A battery

The manufacturer reserves the right to make changes to the product range and specifications without prior notice.

Care and maintenance

- Use the device only within the permitted range. Do not use the device if it is not working properly. Please note that the parameters of the power supply must comply with the technical characteristics of the device. Do not try to disassemble
 - the device on your own for any reason. For repairs and cleaning of any kind, please contact your local specialized service center.
- Protect the device from sudden impact and excessive mechanical force. Store the device in a dry cool place.
- Only use accessories and spare parts for this device that comply with the technical specifications.
- Never attempt to operate a damaged device or a device with damaged electrical parts! If a part of the device or battery is swallowed, seek medical attention immediately.

Battery safety instructions

- Always purchase the correct size and grade of battery most suitable for the intended use. Always replace the
 whole set of batteries at one time; taking care not to mix old and new ones or batteries of different types.
- Clean the battery contacts and also those of the device prior to battery installation.
- Make sure the batteries are installed correctly about polarity(+ and –). Remove batteries from equipment that is not to be used for an extended period of time.
- Remove used batteries promptly. Never short-circuit batteries as this may lead to high temperatures, leakage, or explosion.
- Never heat batteries to revive them. Do not disassemble batteries. Remember to switch off devices after use.
- Keep batteries out of the reach of children, to avoid the risk of ingestion, suffocation, or poisoning. Utilize used batteries as prescribed by your country's laws.

Warranty

Ermenrich Warranty

Ermenrich products, except for their accessories, carry a 5-year warranty against defects in materials and workmanship. All Ermenrich accessories are warranted to be free of defects in materials and workmanship for six months from the purchase date. The warranty entitles you to the free repair or replacement of the Ermenrich product in any country where a Levenhuk office is located if all the warranty conditions are met. For further details, please visit ermenrich.com If warranty problems arise, or if you need assistance in using your product, contact the local Levenhuk branch.

FAQ

- Q: Can I use a different type of battery?
- A: No, it is recommended to use a 12V 23A battery as specified in the user manual for optimal performance.
- Q: What is the warranty period for the Ermenrich Zing CT30 Auto Tester?
- A: The Ermenrich Warranty covers the product for a period of 2 years from the date of purchase.

CONTACT

- Levenhuk Optics s.r.o. (Europe): V Chotejně 700/7, 102 00 Prague 102, Czech Republic,
- + 420 737-004-919,
- sales-info@levenhuk.cz
- Levenhuk USA 928 E 124th Ave. Ste D, Tampa, FL 33612, USA,
- \bullet + 1813468-3001,
- · contact us@levenhuk.com
- Levenhuk®, Ermenrich® are registered trademarks of Levenhuk Optics s.r.o. (Europe). 2006–2024 Levenhuk,
 Inc. All rights reserved.
- ermenrich.com
- 20241029

Documents / Resources



ERMENRICH Zing CT30 Auto Tester [pdf] User Manual CT30, Zing CT30 Auto Tester, Zing CT30, Auto Tester, Tester

References

- O Levenhuk's official website in Europe
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.