



EWIN FT22M Open Frame Touch Signage Monitor Instruction Manual

[Home](#) » [EWIN](#) » EWIN FT22M Open Frame Touch Signage Monitor Instruction Manual 

EWIN

FT**M 22"/27"/32"/43"/49"/55"

Open Frame Touch Signage – Monitor



Contents

- [1 Key Feature](#)
- [2 Specification](#)
- [3 Documents / Resources](#)
- [3.1 References](#)

Key Feature

- 3840×2160/ 1920×1080 physical resolution
- 10 Points Capacitive Touch
- HDMI input
- Built-In Speakers
- Industrial grade components

- Open frame design for Embed Installation

Specification

Display						
Model	FT22M	FT27M	FT32M	FT43M	FT49M	FT55M
Screen Size	21.5 inch	27 inch	32 inch	43 inch	49 inch	55 inch
Native Physical	Resolution	1920	1080	3840 x 2160		

LCD Tech	ADS
Brightness	500nit
Contrast	1200 :1
View Angle	178°(H) / 178°(V)
Display Color	1.07B
Life Time	50,000 hrs

Interface	
USB	× 1
HDMI	× 1
VGA	× 1
DVI	× 1
Built-In Speaker	5W × 2 (8Ω)

Touch	
Touch Type	10 Points Capacitive Touch
Touch Method	Finger
Touch Accuracy	≤2mm
Touch Response Time	<4ms
Light Transmission	≥85%


Power						
Power supply	AC110-240V(50/60Hz)					
Power consumption	60W	65W	110W	125W	150W	180W
Power of Standby Mode	0.5W	0.5W	0.5W	0.5W	0.5W	


Environment	
Operation temperature	0°C~40°C
Operation humidity	10%~80% RH

Specification

Physical						
Model	FT22M	FT27M	FT32M	FT43M	FT49M	FT55M
Color	Black					
Body Dimension	524.2 x 316.1	653 x 393 x	753 x 447 x	1012 x 600 x	1145 x 675x	1287 x 770 x
(mm)	x 63.5	60.2	70.1	72.2	72.4	72.2
Set Weight	6.7kg	10.9kg	14.6kg	23.9kg	27.5 kg	36.1 kg
Package	685 x 450 x	815 x 530 x	910 x 577 x	1170 x 730 x	1305 x 805 x	1440 x 900 x
Dimension(mm)	215	235	240	240	240	240
Package Weight	10.2kg	15.6kg	20.5kg	31.2kg	35.3 kg	45.6 kg
Mounting Holes	350×200	500×300	500×300	600 × 400	500 × 400	500×400

Dimension Drawing

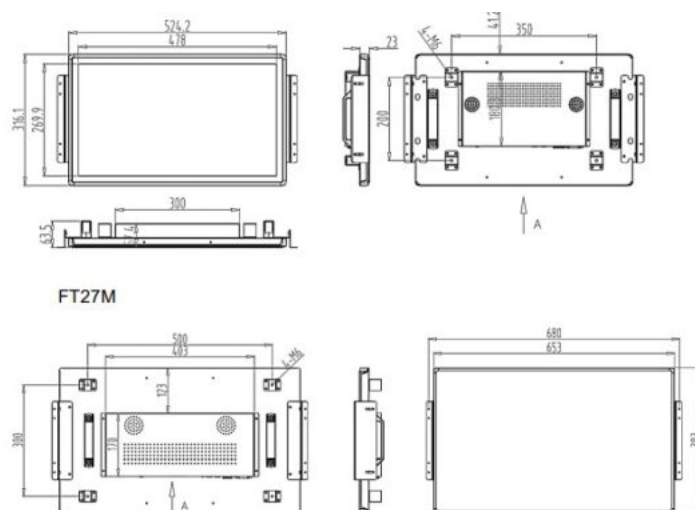

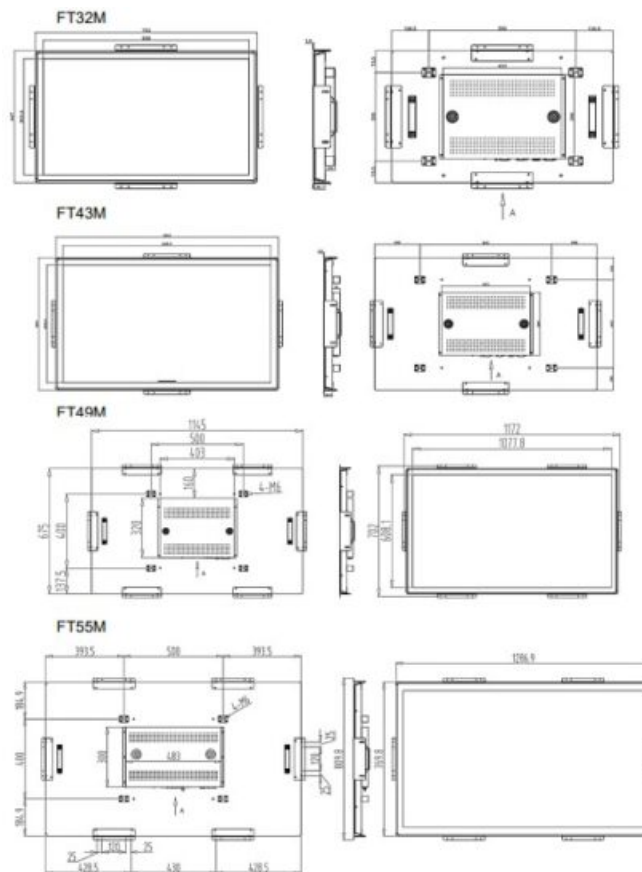

Accessories Lists

No.	Parts	Qty	Specification
1	Power cord	1	1.5m
2	Remote controller	1	—
3	User manual	1	—

EWIN

Documents / Resources

	EWIN FT22M Open Frame Touch Signage Monitor [pdf] Instruction Manual FT22M, FT27M, FT32M, FT43M, FT49M, FT55M, FT22M Open Frame Touch Signage Monitor, FT22M, Open Frame Touch Signage Monitor, Touch Signage Monitor, Signage Monitor, Monitor
--	---

References

- [User Manual](#)

