




Fanvil X7A Android Touch Screen IP Phone Installation Guide

[Home](#) » [Fanvil](#) » Fanvil X7A Android Touch Screen IP Phone Installation Guide 








Fanvil X7A Android Touch Screen IP Phone

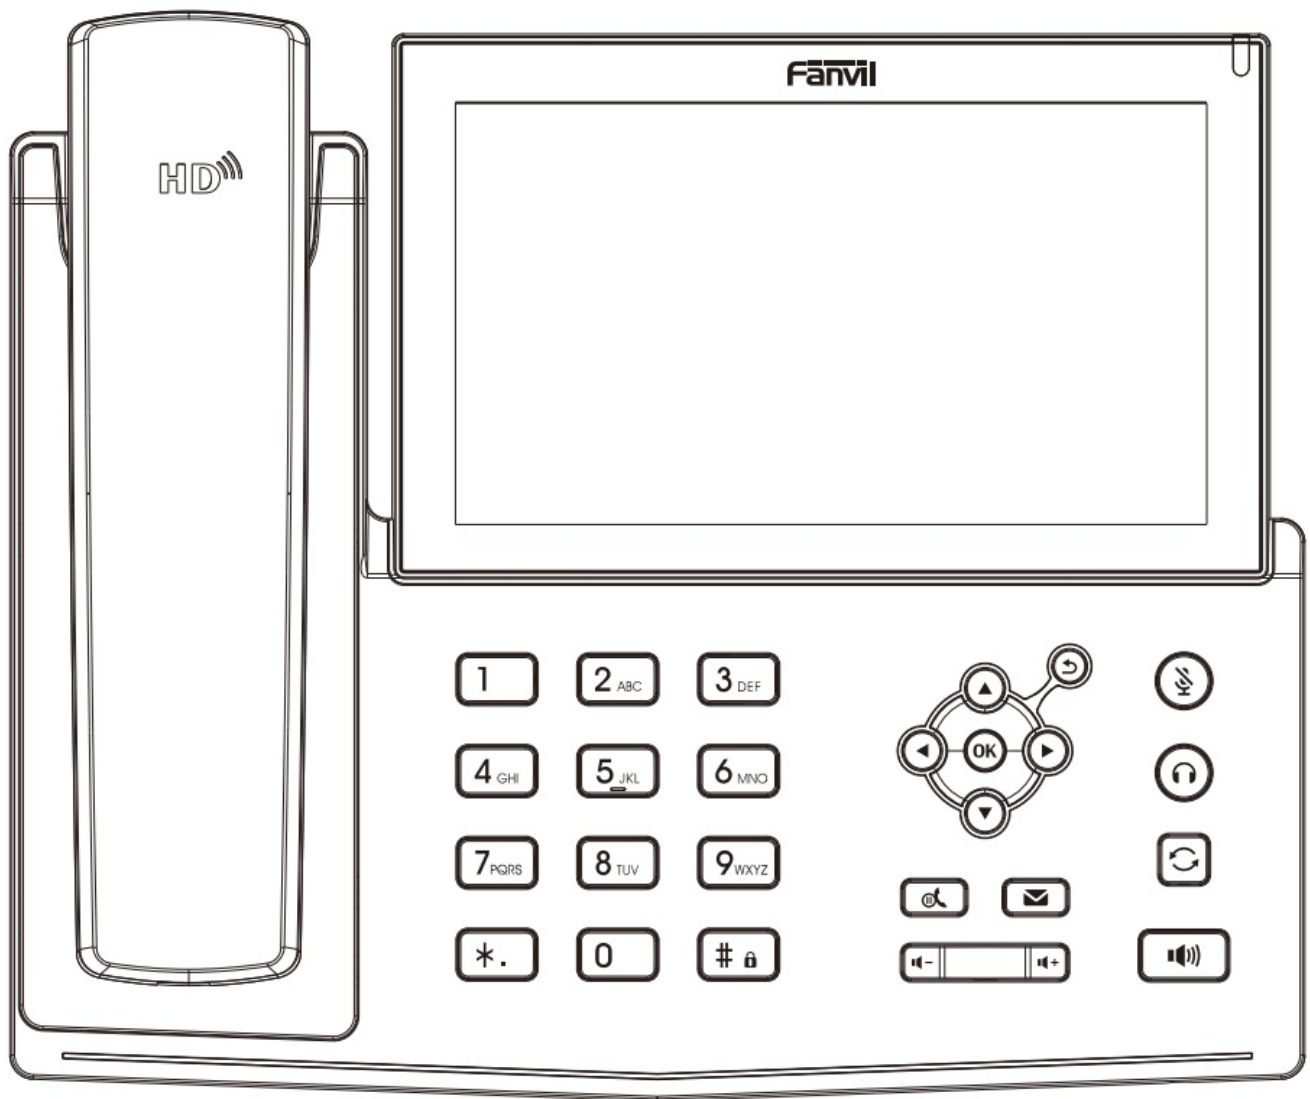





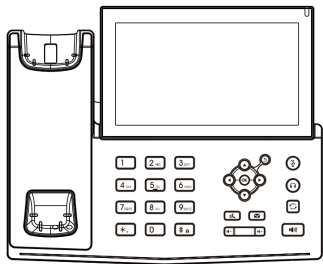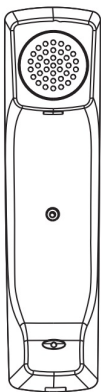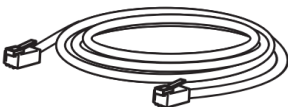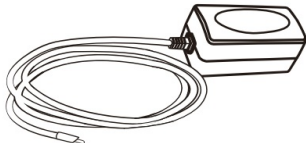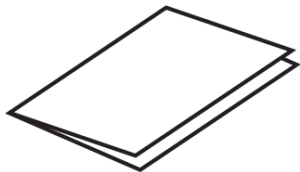

Contents















- [1 Packing List](#)
- [2 Screen Icon](#)
- [3 Keys Feature](#)
- [4 Installation the device](#)
 - [4.1 Bracket desktop installation](#)
 - [4.2 Connecting to the Device](#)
- [5 Configuration](#)
 - [5.1 Configuration via Phone](#)
 - [5.2 Configuration via Web](#)
- [6 Language setting](#)
- [7 Making a call](#)
- [8 Accepting a call](#)
- [9 Putting a call on hold](#)
- [10 3-party conference](#)
- [11 Call transfer](#)
- [12 Call forward](#)
- [13 Call Mute](#)
- [14 Call list](#)
- [15 Phonebook](#)
- [16 Programmable keys](#)
- [17 Redial](#)
- [18 Do not disturb](#)
- [19 Voice message](#)
- [20 Bluetooth](#)
- [21 Wi-Fi](#)
- [22 Customer Support](#)
- [23 Documents / Resources](#)
- [24 Related Posts](#)

Packing List


| | | |
|---|--|---|
| <p>IP Phone</p>  | <p>Handset</p>  | <p>Handset Cord</p>  |
| <p>Stand</p>  | <p>Ethernet Cord</p>  | <p>Power Adapter (Optional)</p>  |
| <p>Quick Installation Guide</p>  | | |








Screen Icon

| | | | |
|---|--------------------|---|--------------------------|
|  | In hands-free mode |  | New SMS |
|  | In headset mode |  | New VM Messages |
|  | In handset mode |  | Do not disturb activated |

| | | | |
|---|--------------------------|---|-------------------------|
|  | Mute activated |  | Missed call(Status bar) |
|  | Ringer off |  | Received call |
|  | Call is on hold |  | Dialed call |
|  | Auto-answering activated |  | Missed call (s) |
|  | Call Forward activated |  | Forward call |
|  | Internet is disconnected |  | Enable Blacklist |
|  | Internet is connected |  | Enable White List |

Keys Feature

| | |
|---|---------------------------|
|  | Message waiting indicator |
|---|---------------------------|


| | |
|---|---|
|  | <p>Up/down/left/right navigation keys, Return key OK key, Shortcut to Menu Return key, Go back to the previous directory</p> |
|  | <p>Hold key, Hold/Resume the call</p> |
|  | <p>In idle mode: ringer off In communication mode: mute/un-mute a call</p> |
|  | <p>In idle mode or during ringing: increase or decrease ringer volume In communication: increase or decrease earpiece, headset or hands-free volume</p> |
|  | <p>Voice message key</p> |
|  | <p>Headset key, Activate/deactivate Headset</p> |
|  | <p>Redial key, Access to redial the last record</p> |
|  | <p>Long press to lock keypad. Enter PIN to unlock keypad (default 123)</p> |



Hands-free key, Activate/deactivate hands free

Installation the device


Bracket desktop installation

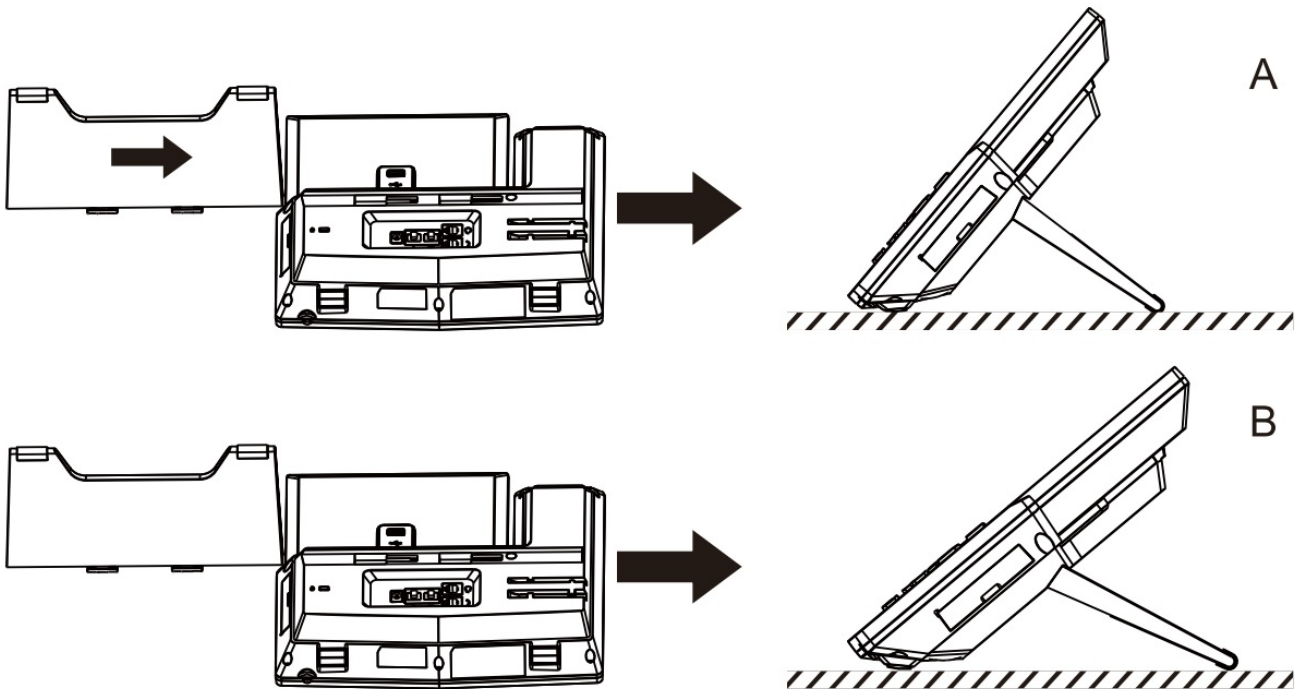

Connecting to the Device


Please connect power adapter, network, PC, handset, and headset to the corresponding ports as described in below picture.

1. **USB port:** connect USB device (U disk)
2. **Power port:** connect the power adapter.
3. **Network port:** connecting local area network or internet.
4. **PC port:** the network port connect to the computer.
5. **Headset port:** connect headset.
6. **Handset port:** connect IP Phone handset.

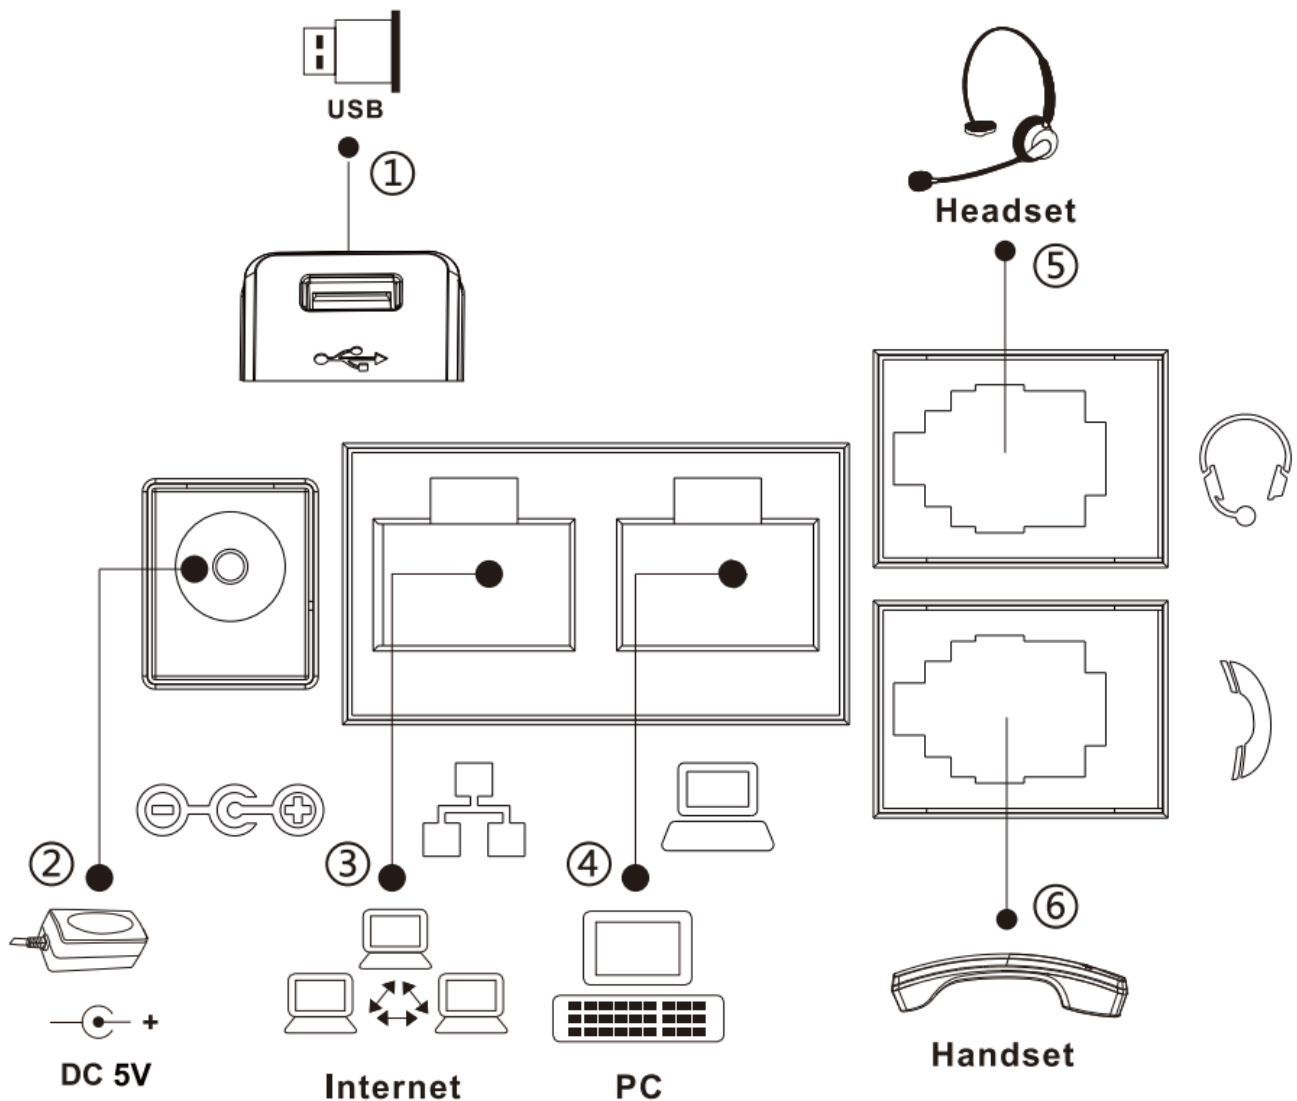


Configuration


Configuration via Phone

1. Press Phone Settings icon .
2. **Select Ethernet Settings:** To configure the Network Settings (DHCP/Static)
3. **Select Line:** To configure enable the account, fill the SIP server address, port, user name, password etc.

Configuration via Web




1. Get the IP address from the phone: Press Phone Settings icon  > Common.
2. **Login:** Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both 'admin' .)
3. **Configure:** Select network/Account, etc. And fill the relevant content.

Language setting



1. Press Settings icon  > System > Language & Input > Languages.

2. Select the desired language.

Making a call

1. **Pre-dialing:** enter the phone number and pick up the handset.
2. **Direct dialing:** lift the handset and enter the phone number.
3. **Handsfree:** enter phone number and press  or vice versa.
4. **Headset:** enter phone number and press  or vice versa.
5. **Dial icon:** Click dial icon  and then enter the phone number.
6. **Designated line:** press line key, enter phone number and press dial key.

Accepting a call



1. With the handset: pick up the handset.
2. With a headset: press .
3. With the handsfree: press ).

Putting a call on hold

1. Press  key or Hold icon, caller is put on hold.
2. To retrieve the call press  key or Resume icon.



Note: with more than one active call, select desired call by sliding screen and use the corresponding icon to hold or resume.

3-party conference



1. Once in line with 1st caller, press  Conference icon, 1st caller is put on hold.
2. Then call the 2nd number.
3. After, 2nd call is established, press  Conference icon to set up the conference.

Call transfer



Attended transfer:

1. Press  Xfer icon during the active conversation, the call is put on hold.
2. Dial the second telephone number.
3. When the call is answered, then press  Xfer icon to complete the operation.



Blind transfer:

1. Press  Xfer icon during the active conversation, the call will be on hold.
2. Then enter the 2nd telephone number and press  Xfer icon.






Call forward

1. Press Phone Settings icon  >Line> Select the line > Forward Settings
2. Enter the destination number and the type of forward and press OK icon .

Call Mute



1. Press  to Mute the microphone during the call.
2. Press  again to un-mute the conversation.

Call list



1. Press Call Logs icon .
2. Scroll the list using navigation key  or slide the screen
3. To dial an entry, press Dial icon  or click the phone icon at left then click dial icon or pickup handset or press  or .

Phonebook

Access phonebook:


1. Press Contact icon .
2. Select All Contacts or other group.
3. To dial an entry, press Dial icon .

Add new entry:


1. Press Contact icon a , Press All Contacts or other group > Press Add icon.
2. Enter name and number and press OK icon .

Programmable keys

DSS virtual keys:

1. You can use the phone web interface to configure the keys of the screen.
2. Press unfold > you can press any keys which is still blank or long press the key that have configured, select a type and value, press  icon.



Other keys:

1. You can also configure shortcuts for the navigation keys and softkeys on web ui.
2. You can press Phone setting icon  Key, select the Softkey Screen you need, then select among the configurable items, and select your desired type and value, press Save.



Redial

1. Press , redial a call number.


Do not disturb

1. Press ONO icon  when standby or click Phone Settings icon  > DND.
2. Select the Mode.


Voice message

1. To access your voice mailbox, press Voice message key  or Voice message icon , number of message be indicated if provided by your server or PBX.
2. Select the line and press phone icon to call.

Bluetooth

1. Press Bluetooth icon in the status bar to open Bluetooth.
2. Press Settings icon  > Connected devices> Pair new device. After opening, it displays the scanned Bluetooth list, select any device, and click on the device pairing.

Wi-Fi

1. Enter the Settings icon  > Network & internet> Wi-Fi, enable Wi-Fi, and you can browse the list of available Wi-Fi;
2. Select the available network, click on the network to enter the password to connect and click connect button.

Customer Support

Fanvil Technology Co., Ltd

www.fanvil.com

Email: sales@fanvil.com Tel:0755-2640-2199

Add: 4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II),67th District, Bao'An, Shenzhen, China



Documents / Resources



[Fanvil X7A Android Touch Screen IP Phone](#) [pdf] Installation Guide

X7A Android Touch Screen IP Phone, X7A, Android Touch Screen IP Phone, Touch Screen IP Phone, Screen IP Phone, IP Phone, Phone

[Manuals+](#)