

**FT** FeinTech®  
**SDF00400 Infrared  
Remote Control**



## FeinTech SDF00400 Infrared Remote Control User Manual

[Home](#) » [FeinTech](#) » FeinTech SDF00400 Infrared Remote Control User Manual 

### Contents

- [1 FeinTech SDF00400 Infrared Remote Control](#)
- [2 FEATURES](#)
- [3 Product Usage Instructions](#)
- [4 Safety instructions](#)
- [5 Batteries](#)
- [6 FAQ](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)




**FeinTech SDF00400 Infrared Remote Control**



#### Specifications:

- **Model:** FeinControl SDF00400
- **Power Source:** Batteries
- **Compatibility:** Infrared remote controls
- **Special Features:** Learning mode, switchable lighting

#### FEATURES

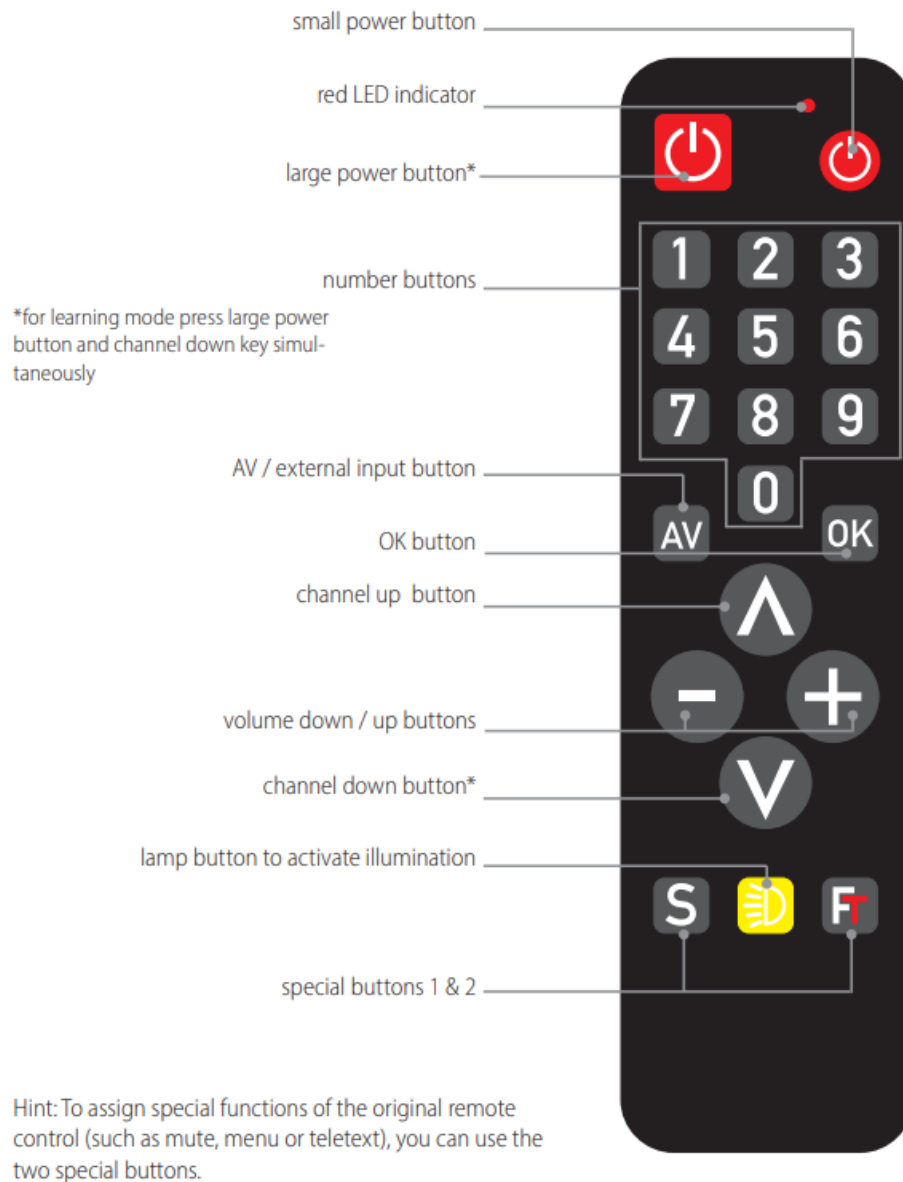

## Product Usage Instructions

### Safety Instructions:

It is important to handle batteries properly and dispose of them in an environmentally friendly way. Do not dispose of the product or its packaging with normal household waste.

### How it Works:

The FeinControl can learn and mimic the commands of an existing infrared remote control. It has large buttons for easy operation and switchable lighting for use in the dark.

### Compatibility:

The FeinControl is compatible with various devices and offers features like volume control, channel selection, and special function buttons.

### Preparation:

1. Insert batteries into the FeinControl and the source remote control.
2. Place the remote controls 4 cm apart on a table with the infrared transmitters facing each other.

### Lernmodus:

To enter the learning mode, press the large power button and channel down key simultaneously.\*

### **Service:**

If you have any questions about the operation or the product, contact us directly at Phone +49 3546 239 8855 or [service@feintech.eu](mailto:service@feintech.eu)

### **Preparation:**

Insert batteries into the FeinControl and the desired source remote control. Place the remote controls at a distance of approx. 4 cm from each other on a table so that the infrared transmitters are facing each other:



### **Learning mode**

Press the large power button and keep it pressed. Then briefly press the “Channel down” button  $\nabla$  at the same time. The red LED now flashes permanently, the FeinControl is in learning mode. To learn-in, first press the desired target button on the FeinControl. The red LED then lights up permanently. Now press the button on the source remote control. When the command has been accepted, the LED flashes again. You can now continue with the next button. Note: If you do not press any key for 15 seconds, the learning mode switches off. Previously saved commands are retained. You can restart the learning mode at any time. You can change or overwrite the saved key assignments as you wish. All settings are retained even after the battery has been changed. The choice of buttons is completely up to you. You just need to remember the assignment if the button on the original remote control is labeled differently! The learning mode can be ended by holding down the large power button and then pressing the “Channel down” button  $\nabla$ . The LED goes out and you are in the operating mode. Now control your device comfortably with the FeinControl. The red LED lights up briefly each time the button is pressed.

### **Illumination:**

For better operation in the dark, the FeinControl has a keyboard illumination. Press the lamp symbol to switch it on. The light switches off automatically 7 seconds after the last key press.

### **Safety instructions**

Please read the following safety instructions carefully before using this product to ensure proper use. Keep these instructions for future reference:

- Do not attempt to open the appliance. Repairs and maintenance should only be carried out by qualified personnel.
- Always place the appliance on a stable, flat surface to prevent it from falling.
- To avoid damage, do not expose the product to water, moisture or high humidity.
- To avoid damage, do not expose the device to direct sunlight or high temperatures.
- Do not place the device near heat sources such as radiators, heat registers, ovens or other heat-generating

devices.

- To avoid damage, do not place any objects on top of the appliance.
- Bright light, e.g. from lamps or direct sunlight, can affect remote controls. In this case, the remote control may not work.

## Batteries

2 AAA batteries are required to operate the device (not included). Open the battery compartment by sliding the catch. Insert the 2 batteries with the correct polarity according to the + and – markings in the battery compartment. If the batteries are inserted correctly, an LED on the remote control lights up when a button is pressed.

- Do not use old batteries together with new ones. Do not use different types of batteries together.
- Do not attempt to recharge the batteries.
- If you do not intend to use the remote control for a longer period of time, remove the batteries.
- If battery fluid leaks out, completely clean the battery compartment of the leaked fluid and then replace the batteries with new ones.
- The batteries should be replaced every 12 months. If the remote control no longer works properly, replace both batteries with new ones.
- Batteries contain recyclable materials, but may also contain substances that are hazardous to health and the environment. Therefore, they should not be disposed of with household waste after use.

## Disposal of the packaging

The packaging of the device consists of recyclable materials. Please take it to your local recycling centre. Please contact your dealer or a municipal waste disposal facility/recycling centre for information on current disposal methods.

## Disposal of the appliance

Old appliances are not worthless waste. Valuable raw materials can be recovered through environmentally friendly disposal. At the end of its service life, this product must not be disposed of with normal household waste, but must be taken to a collection centre for the recycling of electrical and electronic equipment. This is indicated by the symbol on the product, in the instructions for use or on the packaging. The materials are recyclable according to their labelling. By reusing, recycling or otherwise utilising old appliances, you are making an important contribution to protecting our environment.

## CE Declaration of Conformity

This product complies with EU directives. We, Spreewald Kommunikationstechnik GmbH, hereby declare that this device complies with the EMC Directive 2014/30/EU and the RoHS Directive 2011/65/EU. The formal declaration of conformity is available at <https://feintech.eu/ce> or on request. FeinTech is a registered trademark of Spreewald Kommunikationstechnik GmbH, Radensdorfer Hauptstr. 45 a, 15907 Lübben (Spreewald), Germany, [info@feintech.eu](mailto:info@feintech.eu)

## Service

If you have any questions about the operation or the product, please contact us directly.

## Service contact:

- **Phone** +49 3546 239 8855 –
- [service@feintech.eu](mailto:service@feintech.eu)

## How it works

The FeinControl can learn the most important keyboard commands of an existing infrared remote control and then send them like the original. The few and large buttons make it easy to operate – ideal for senior citizens. The switchable lighting simplifies operation in the dark. If required, the FeinControl can copy individual commands from a third remote control. For example, you can copy the program selection buttons from the TV, but the volume control from the audio amplifier. You can assign the buttons according to your own preferences.

### Compatibility

The FeinControl remote control only supports infrared commands. However, some remote controls nowadays use Bluetooth or radio, which are not compatible. An infrared remote control sends a signal using infrared light. This light cannot be seen directly by the human eye. However, you can make it visible using a digital camera, mobile phone camera or camcorder. Check whether your infrared remote control is sending a signal. Open the camera app on a smartphone. Point the end of the remote control with the infrared transmitter at the camera lens. Look into the viewfinder display. Press one of the buttons on the remote control. When the remote control sends an infrared signal, you will see a light in the app. This may be a faint pink or white light. If nothing lights up, it is probably a non-compatible RF or Bluetooth remote control.

### FAQ

#### **Q: How do I dispose of the batteries and packaging?**

A: Batteries should not be disposed of with household waste. Take them to a recycling center. The packaging is recyclable; take it to a local recycling center.


#### **Q: How do I dispose of the appliance?**

A: Old appliances should not be disposed of with normal household waste. Take them to a collection center for recycling of electrical and electronic equipment.

#### **Q: How can I copy individual commands from a third remote control?**

A: Press the large power button and channel down key simultaneously to enter learning mode, then follow the instructions in the manual to copy commands.

### Documents / Resources

	<b><a href="#">FeinTech SDF00400 Infrared Remote Control</a></b> [pdf] User Manual SDF00400 Infrared Remote Control, SDF00400, Infrared Remote Control, Remote Control, Control, Remote
---	--

### References

- [Ft CE Konformitätserklärungen - FeinTech](#)
- [User Manual](#)

#### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.