

**FREAKS
& GEEKS**
**PS5 Wired
Controller**



FREAKS AND GEEKS PS5 Wired Controller User Manual

[Home](#) » [FREAKS AND GEEKS](#) » FREAKS AND GEEKS PS5 Wired Controller User Manual 

Contents


- [1 FREAKS AND GEEKS PS5 Wired Controller](#)
- [2 PRODUCT OVERVIEW](#)
- [3 SPECIFICATIONS](#)
- [4 OPERATION INSTRUCTIONS](#)
- [5 PROGRAMMING INSTRUCTIONS](#)
- [6 TURBO FUNCTION](#)
- [7 FIRMWARE UPDATE INSTRUCTIONS](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)




FREAKS AND GEEKS PS5 Wired Controller



PRODUCT OVERVIEW

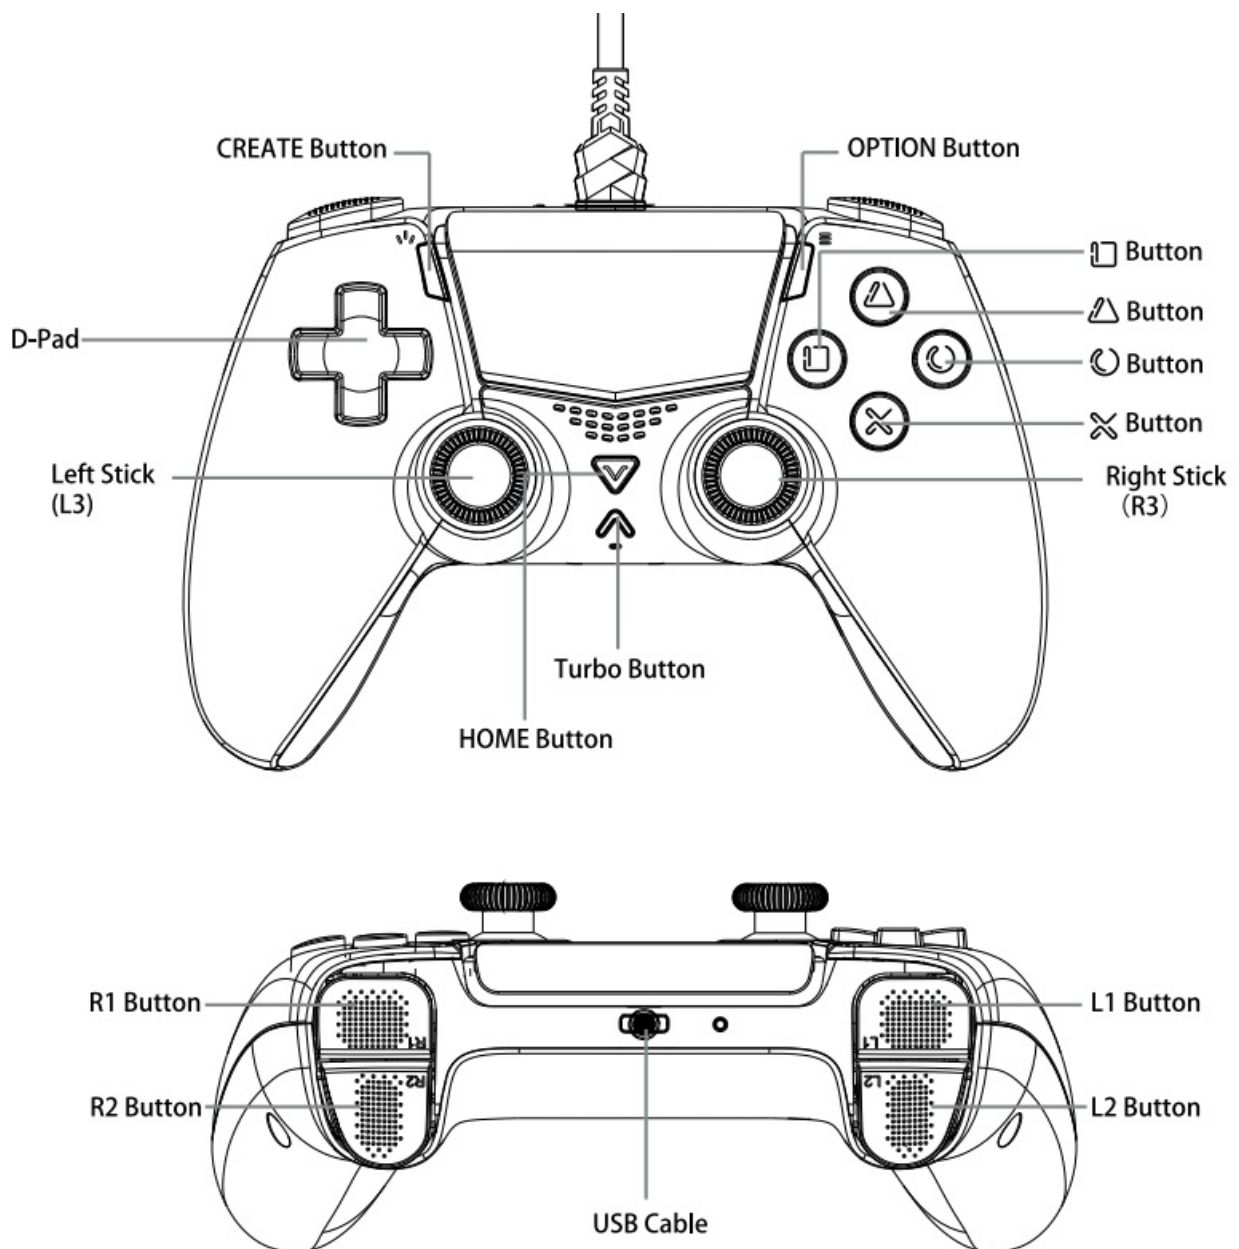

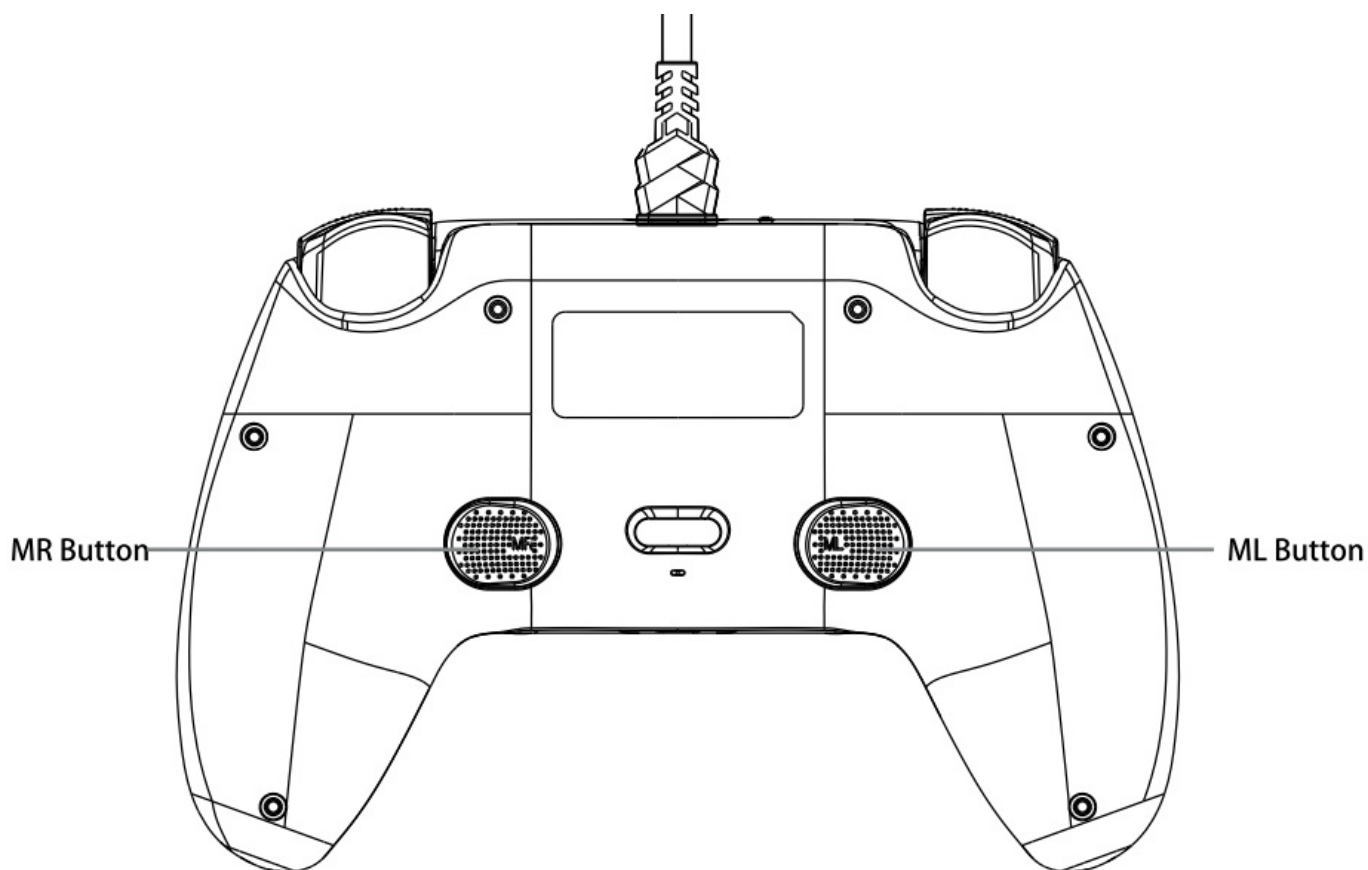

SPECIFICATIONS

- Compatible with PS5 console.
- Connectivity: Wired connection via USB-C.
- Total Number of Buttons: 19 digital buttons including, \triangle , \circ , \times , \square directional buttons (Up, Down, Left, Right), L3, R3, Create, Option, HOME, Touch, L1/R1, and L2/R2 (with trigger function), as well as a Turbo button. Additional ML and MR programmable buttons are located on the back, along with two 3D analog sticks.

Functionality

1. Equipped with a 6-axis sensor (3-axis accelerometer and 3-axis gyroscope) with a 125 Hz response rate for precision control.
2. Features a dual-point capacitive touchpad on the front and supports dual-motor vibration.
3. Includes multiple output ports, including a 3.5mm TRRS stereo jack for headphones and microphone, and a dedicated speaker output with RGB LED channel indicators for distinguishing users and roles.

Power Supply

- **Working Voltage:** 5V
- **Working Current:** 45mA
- **Input Voltage:** DC 4.5 – 5.5V
- **Charging Input Current:** 50mA
- **Interface:** USB-C
- **Programmable Buttons:** Back buttons ML and MR can be programmed via specific button combinations.
- **Compatibility:** Supports standard PS5 functions and can also operate in PS5 mode on PC via Steam.

OPERATION INSTRUCTIONS

PS5 Connection

- Turn on the PS5 console.
- Connect the controller to the console using the USB-C cable.
- Press the HOME button on the controller to power it on. Once the indicator light flashes, select a user profile, and the player indicator light will remain on.

Go to console settings and select:

- Settings → Peripheral Devices – Controller (General) → Connection Method → «Use USB-C Cable».

PROGRAMMING INSTRUCTIONS





ML Button Programming:

1. Press and hold the Create button and the ML button simultaneously until the channel light flashes.
2. Release both buttons, then press the desired function buttons (e.g., L1, R1, A, B) to assign them to the ML button.
3. Press the ML button again to confirm. Once programming is complete, the channel light will stop flashing, and the ML button will now perform the assigned functions.

MR Button Programming:


1. Press and hold the Option button and the MR button simultaneously until the channel light flashes.
2. Release both buttons, then press the desired function buttons (e.g., L1, R1, X, O) to assign them to the MR button.
3. Press the MR button again to confirm. The MR button will now execute the assigned functions in sequence, indicated by a running light display.


TURBO FUNCTION

- The following buttons can be set for Turbo mode: , , ,  L1, L2, R1, R2.
- **To Enable Manual Turbo Mode:** Press the TURBO button along with the desired function button.
- **To Enable Auto Turbo Mode:** Repeat the above step to enable automatic turbo.
- **To Disable Turbo Mode:** Press the TURBO button and the function button a third time to turn off both manual and auto turbo modes.

FUNCTION EXCHANGE

Changing the mode of the 3D joysticks:

- Press Create +  to set the 3D joysticks to 'square dead zone'
- Press Create + 0 to set the 3D joysticks to 'circular dead zone'

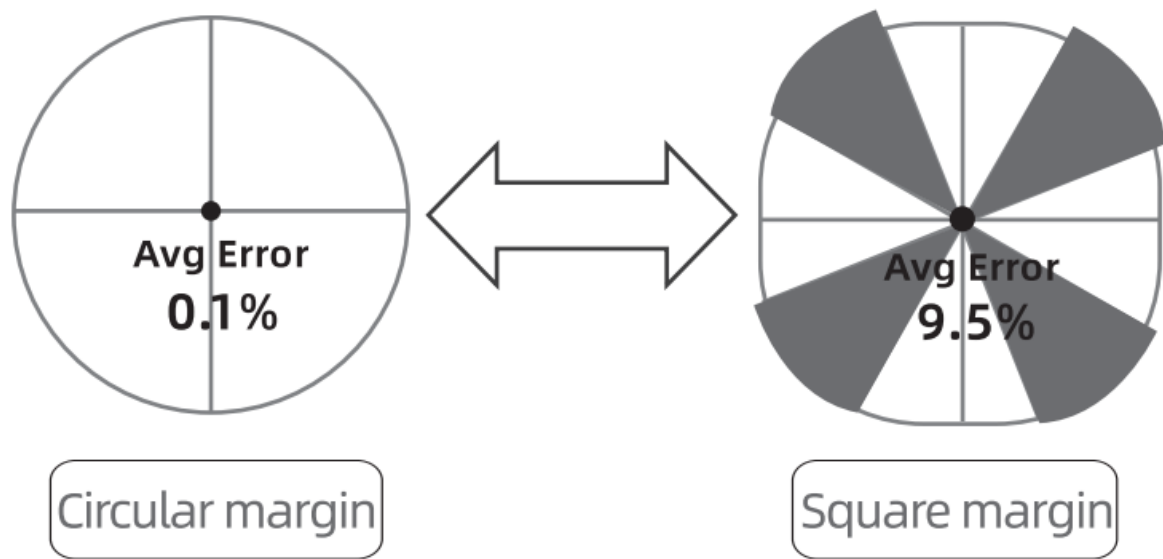

ABXY Position Exchange: Press Create + R3 to swap the A/B and X/Y button functions.

LED LIGHT FUNCTIONS

1. Turbo Indicator: a LED under the Turbo button blinks when the turbo function is active.
2. Button Backlight: The four LEDs under the ABXY buttons provide constant decorative lighting when powered on.
3. User Channel Indicator Lights: The four RGB LEDs on the top surface display the user channel associated with the PS5 console.

FIRMWARE UPDATE INSTRUCTIONS

If the controller disconnects following a console update, a firmware update may be required. The latest driver can be downloaded from our website: <https://freaksandgeeks.eu/mises-a-jour/>. Firmware updates should be performed using a Windows PC according to the update instructions provided.

WARNING

- If you hear a suspicious sound, smoke, or a strange smell, stop using this product.
- Do not expose this product to microwaves, high temperatures, or direct sunlight.
- Do not let this product come in contact with liquids or handle it with wet or greasy hands. If liquid gets inside, stop using this product
- Do not subject this product to excessive force. Do not pull on the cable or bend it sharply.
- Keep this product and its packaging out of reach of young children. Packaging elements could be ingested. The cable could wrap around children's necks.
- People with injuries or problems with fingers, hands or arms should not use the vibration function
- Do not attempt to disassemble or repair this product. If either is damaged, stop using the product.
- If the product is dirty, wipe it with a soft, dry cloth. Avoid the use of thinner, benzene or alcohol.

REGULATORY INFORMATION


Simplified European Union Declaration of Conformity: Trade Invaders hereby declares that this product complies with the essential requirements and other provisions of Directive 2011/65/UE, 2014/30/UE. The full text of the European Declaration of Conformity is available on our website www.freaksandgeeks.fr Company: Trade Invaders S.A.S.

- **Address:** 28, Avenue Ricardo Mazza, Saint-Thibery, 34630
- **Country:** France
- **Telephone number:** +33 4 67 00 23 51



■ This symbol indicates that the product should not be discarded as unsorted waste but must be sent to separate collection facilities for recovery and recycling.

Documents / Resources

	<p>FREAKS AND GEEKS PS5 Wired Controller [pdf] User Manual PS5, PS5 Wired Controller, Wired Controller, Controller</p>
--	---

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.