

Contents [[hide](#)]

- [1 FreedConn HERO 2ACB3 Bluetooth Helmet Intercom](#)
- [2 Basic functions operation guide](#)
- [3 Music sharing](#)
- [4 Connect to two mobile phones](#)
- [5 How to check your series number in the team](#)
- [6 Installation steps](#)
- [7 Part list](#)
- [8 Product parameters](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



FreedConn HERO 2ACB3 Bluetooth Helmet Intercom



Welcome!

Thank you for choosing Hero, a freedConn multi-scenario bluetooth intercom headset . By purchasing FreedConn's products, you will get the most intimate protection and the most hassle-free after-sales. All the products we present to you are manufactured to the highest standards of performance and safety. We also offer a 2-year full warranty as part of our philosophy of customer service and customer satisfaction. We hope that your purchase will bring you high-quality experience for many years.

Safety tips:

- Wearing a FreedConn headset while riding will reduce your ears' ability to pick up ambient sounds. Listening to music at maximum volume for a long time, with the addiction of temporary adaptation, will prevent a person from hearing soft sounds, which may lead to permanent hearing damage.



Waterproof



6 people conference talking



Make & receive phone calls




Warm reminder:


- In order to enable you to obtain the best sound quality experience, it is recommended that you ensure the distance between the headset unit and the ears remain within 2 mm during installation.
- Please make sure to charge the HERO battery for at least 2 hours before the first use.

Basic functions operation guide





1. Switch on off button/ intercom button

-  Switch On: Long press 2"
-  Switch Off: Long press 3"
-  Connect to Mobile Phone: Long press 8" under the power off state

-  Pairing Information Restting: Long press 8" under the power on state






2. Volume up/previous song button

-  Volume Up: Long press
-  Previous Song: Short press



3.



Multi-function button

-  Pause/Play Music: Short press
-  Answering A Call: Short press
-  Ending A Call: Short press
-  Rejecting A Call: Long press 2"
-  Voice Dial: Long press 2"


4. Volume down/next song button

-  Volume Down: Long press
-  Next Song: Short press

2-6 people group conference talking



1. Long press the power on/off button of A to F devices about 8" to turn into pairing mode.
2. One of the team members short press the intercom button to initiate pairing.

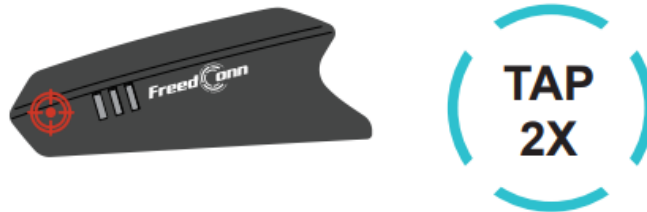

3. Wait for pairing to each other automatically .



Report serial number automatically : #1...#6

4. Start talking
 1. When the number of team members is ≤ 5 , you need to double-click the intercom button on the last host in the queue to start group intercom!
 2. If there are 6 people in the team, you could start talking directly.




Note: It's necessary to delete the pairing information in all devices before starting pairing.

3. Group talking disconnecting/reconnecting

Note: In a group talking, short press the "intercom button" will disconnect your device with the previous and next numbers. Then short press the intercom button again will connect to the next number, or "double" click the intercom button to connect to the previous number.

Music sharing

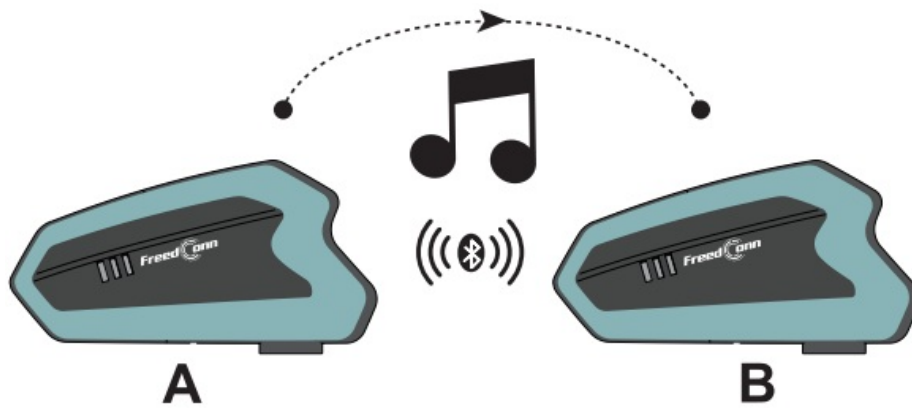

1. Refer to the “pairing method on P3 to establish a two-person intercom state and then turn off the two devices.
2. A&B connect to mobile phone and open music APP.
 1. Note: ① Music sharing only support two Hero pairing.
 2. Mean while, the two device need to be in the music paused state.
3. Double click the intercom button to turn to music shairing mode.



4. Short press multi-function button on the one who wants to share music to another one.



Note: Only the one who shared the music could control the music.

5. Dould click the intercom button of any of the two to get out of reconnect the music sharing mode.



Note:

1. When A shares music to B, press on intercom button of A or B the music of A won't pause. Both A and B can double click intercom button to reconnect.
2. Change the one who sharing music: Both A and B pause music, then the sharing one will be the one who press on the play button.

Connect to two mobile phones

1. Under the power off state, long press on the switch on button for 8" to pair with one of the two phones, and then turn off the device again and repeated the action with another phone to get the another one paired.



2. How to operate music between two mobile phones?




It is needed to operate on the mobile phones for the first time playing music from different mobile phones.

3. How to answer calls by the two connected mobile phones?

Short press on the talking headset's multi-function button to hang up, and press again to answer another mobile's calling.

Switch between manual answering and automatic answering

Under the stand by state, short press on switch on/off button & next song button at the same time.

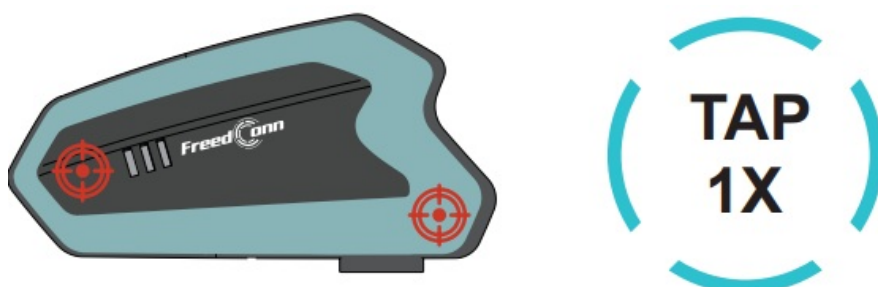



To answer a we chat calling

We-chat voice calls can only be answered and hung up via the mobile phone.

Switch language

Under the standby state, short press on switch on/off button & Multi-function button at the same time.



Pair with the the third brand intercom headset

1. Under the standby state, long press the multi-function button for 8".
2. Turn the third brand intercom headset into pairing mode.

Other brand headset

(follow it's instruction manual)



3. Short press on hero's multi-function button to start talking.





How to check your series number in the team


While you are in a group and your device is power on state, long press the switch on & Multi-function button 3" to check the series number.



Installation steps

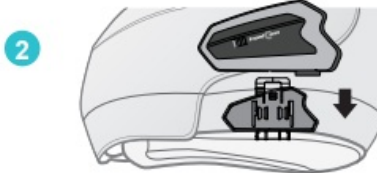

1. Attach the base to the appropriate position on the left side of the helmet.
2. Attach the bluetooth host into the base slot.
3. Stick the Velcro pads onto the helmet's inner position nearby your ears.




4. Fix the speakers on the Vecros.
5. Get the USB jack plugged into the USB port on the Bluetooth host.

Part list




Bluetooth host x1



Fix base x2




Microphone & speaker X1




Velcro pad x4



Soft micro Velcro pad x2



USB-C cable x1



Manual x1

Product parameters

- Bluetooth version: 5.1
- Frequency 2.4 GHz
- Weight 48g
- Host size: 90mmx48mmx21mm
- Charging adapter: Direct current 5V 1A
- Battery capacity 1100mAh
- Battery type: chargeable polymer lithium battery
- Battery material: Ternary lithium material
- Battery model: 802060
- Voltage 3.7V
- Power 4.07Wh
- Intercom time: 30H
- Music time: 26H
- Charging time: 2H
- Standby time: turn off automaticaly if there is no any action on the device no connecting with any other device for 15 minuntes

After-sales technical support

Scan the following code:



FAQ

- **Q: How do I reset the pairing information?**

A: Long press the pairing button under the power on state to reset the pairing information.

- **Q: How do I disconnect/reconnect during group talking?**


A: Short press the intercom button to disconnect from previous and next members.
Double-click to connect to the previous member.

- **Q: How do I switch between manual and automatic call answering?**

A: Short press the switch on/off button & next song button simultaneously under

standby state.

Documents / Resources

| | |
|---|---|
|  | FreedConn HERO 2ACB3 Bluetooth Helmet Intercom [pdf] User Guide HERO 2ACB3, HERO 2ACB3HERO, HERO 2ACB3 Bluetooth Helmet Intercom, HERO 2ACB3, Bluetooth Helmet Intercom, Helmet Intercom, Intercom |
|---|---|

References

- [User Manual](#)

📁 FreedConn
🔍 Bluetooth Helmet Intercom, FreedConn, Helmet Intercom, HERO 2ACB3, HERO 2ACB3 Bluetooth Helmet Intercom, HERO 2ACB3HERO, Intercom

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.