

Generic
Generic V7 Portable
3D Android WiFi Mini
DLP Projector



Generic V7 Portable 3D Android WiFi Mini DLP Projector Instruction Manual


[Home](#) » [Generic](#) » Generic V7 Portable 3D Android WiFi Mini DLP Projector Instruction Manual 

Contents

- 1 [Generic V7 Portable 3D Android WiFi Mini DLP Projector](#)
- 2 [Product Usage Instructions](#)
- 3 [Projector Overview](#)
- 4 [Specifications](#)
- 5 [Remote Control](#)
- 6 [Switching Machine Operation](#)
- 7 [Contents](#)
- 8 [Bluetooth Voice Adaptation](#)
- 9 [Use of the Projector](#)
- 10 [Projection Settings—Omnidirectional Correction](#)
- 11 [FCC WARNING](#)
- 12 [Documents / Resources](#)
 - 12.1 [References](#)
- 13 [Related Posts](#)

Generic

Generic V7 Portable 3D Android WiFi Mini DLP Projector

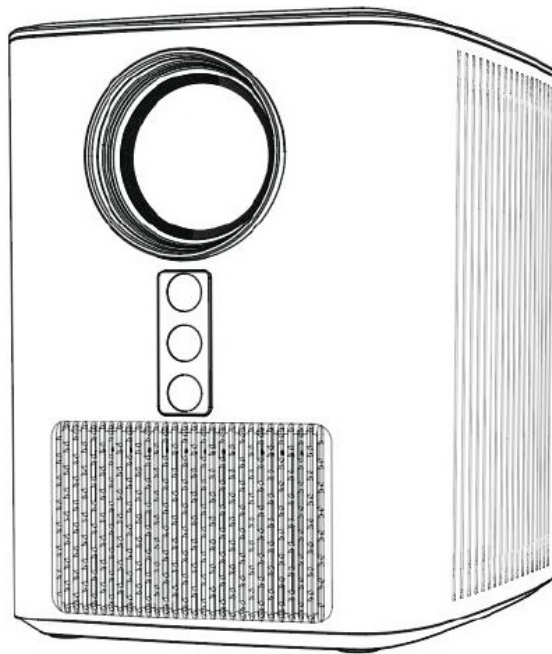

Product Usage Instructions

Important Safeguards

- Use a standard power cord for stable power supply.
- Avoid blocking ventilation scoops and keep away from flammable materials.
- Avoid exposure to water and liquids.
- Please read the manual carefully before operating projector. To ensure stable power supply, please use standard power cord.
- Please use the power supply and cable indicated on the rating label. The projector should be kept away from cloths, sofas and anything that may block the ventilation scoop. Please keep the unit away from flammable and explosive materials.
- Please do not disassemble the unit by yourself as this will invalidate the warranty service. To protect your eyes, do not stare directly at the lens when the projector is on. The projector must be kept away from water and any other liquids.
- To prevent electric shock, please keep the projector out of the rain and away from moisture. Please use the original foam and other cushioning materials when transporting the projector.
- If the projector does not work, please contact the authorized service agent.


Accessories List

- Remote Control x1
- Power Cable x1
- Power adapter x1
- Battery x1
- User Manual x1

Projector Overview


The projector features various ports including HDMI, USB, AV, and headphone jack. It also includes a speaker and

an IR receiver.

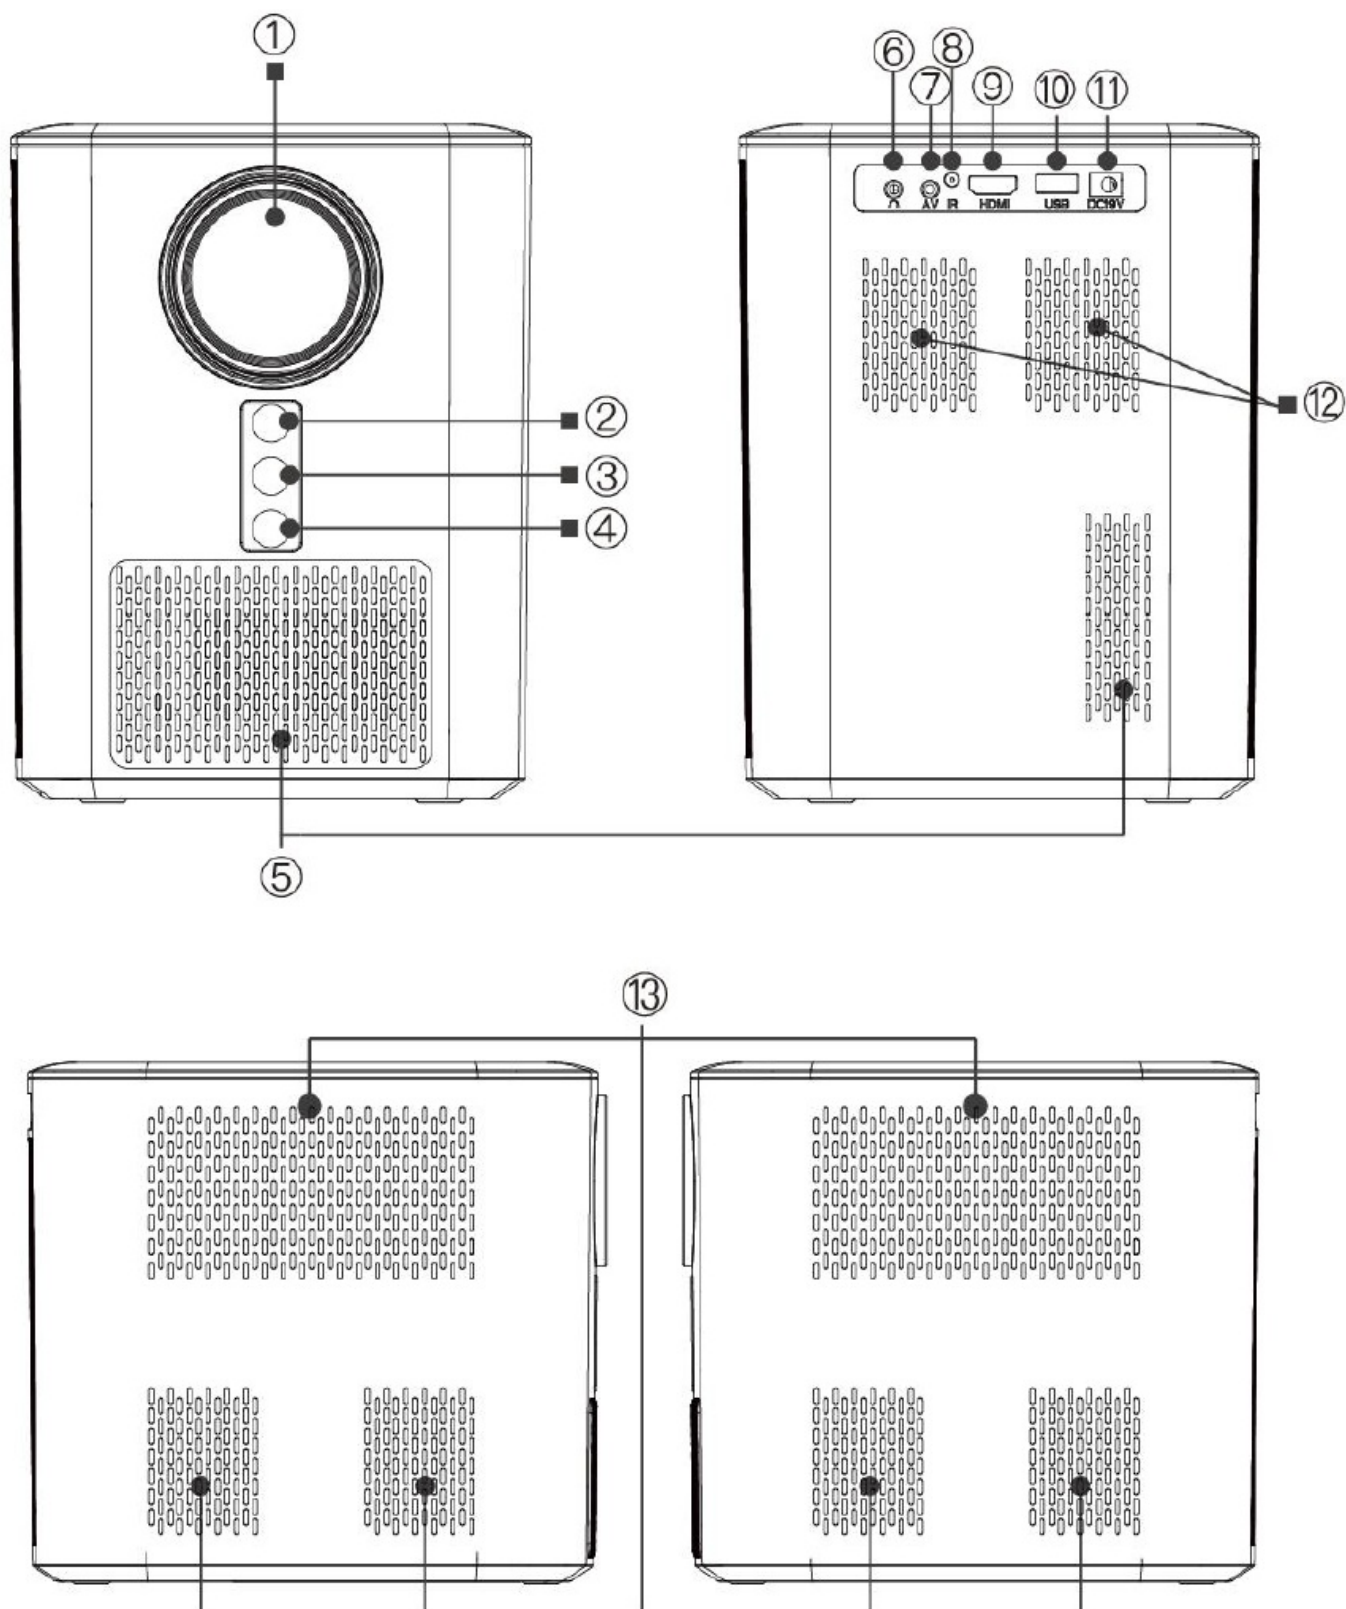

1. Lens
2. None
3. IR Receiver
4. Auto focus signal window
5. Cooling Window
6. Headphone Jack
7. AV Port

8. IR Receiver
9. HDMI Port
10. USB Port
11. Power Socket
12. Speaker
13. Inlet Windows

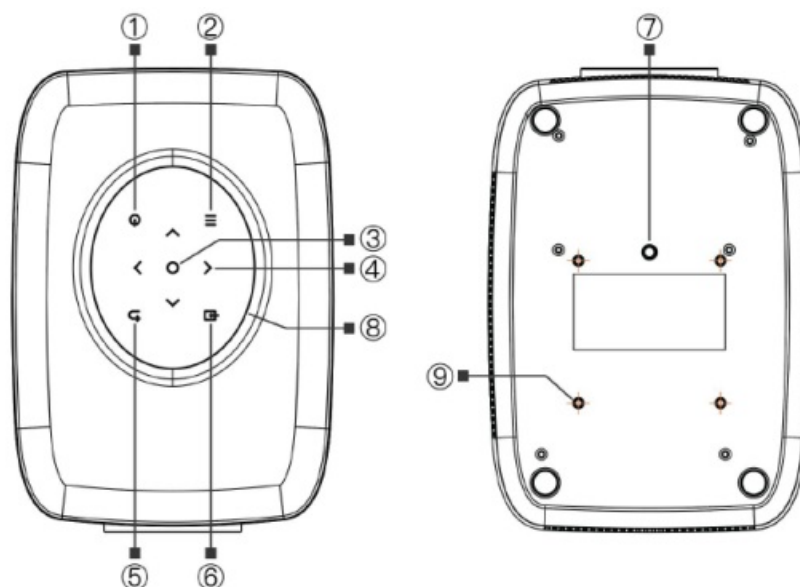

1. Power Key
2. Menu
3. Confirmation Key
4. Direction keys
5. Return key
6. Source key
7. Bracket Holes (4/1 inch),Also Supports Hoisting
8. Red/Blue pilot lamp
9. VESA 75*75mm

Installation Guidelines

Place the projector at specified distances from the projection screen based on the table below. Ensure proper ventilation and avoid blocking vents.

Aspect Ratio	Picture Size (inch)	Projection Distance (m)
16:9	50	1.58
16:9	70	2.13
16:9	100	3.05
16:9	120	3.56
16:9	150	


Specifications

Model	Intelligent projector
Lamp	LED
Image System	LCD
Language	English, total 54 languages
Resolution	1920 x 1080
Input Voltage	DC 19V
Working Temp	0-42°C
Input Port	HDMI / USB / AV
Output Port	Headphone
Aspect Ratio	16:9
Operation Mode	Remote Control / Auto
Weight	2.6kg
Size	240 x 158 x 226 mm

Multimedia Supported Formats

Image Format	BMPIJPG/PNG
Audio Format	MP3/WMA/M4A/MP2/AACIOGG/WAVIFLAC
Video Format	MP4/VOB/3GP/TP/TS/MPE/F4V/DAT/WMV/MOV/FIVITRP
File Format	TXT

Remote Control

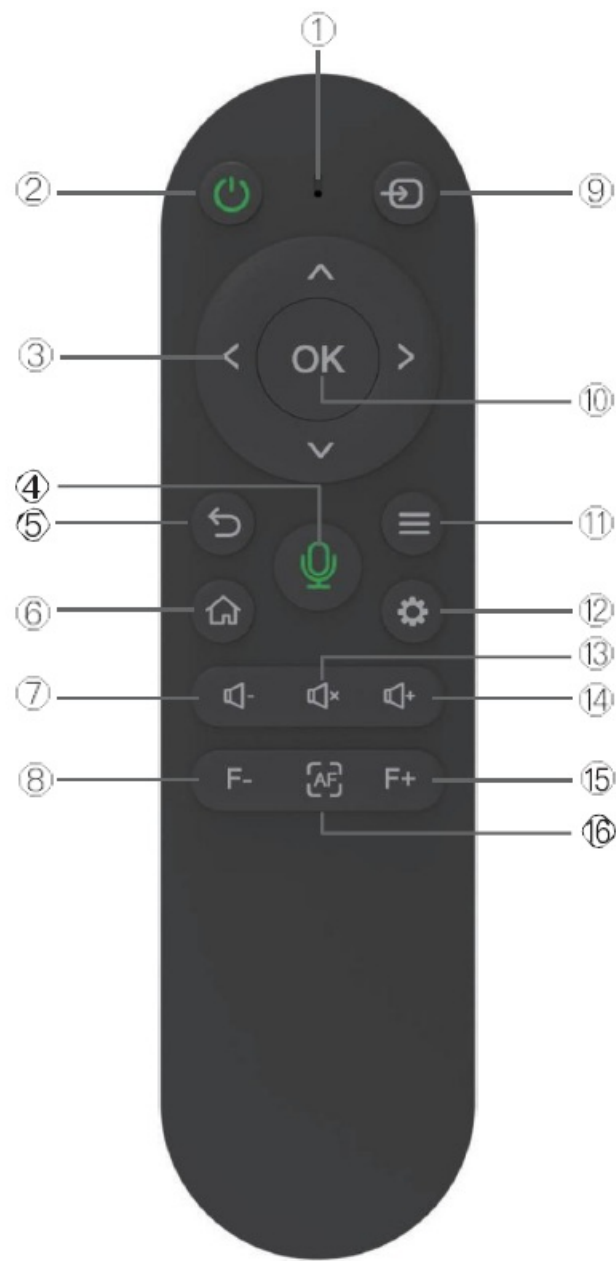

1. Signal Indicator
2. Power Key
3. Arrow keys
4. Microphone
5. Return key
6. Home Key
7. Volume-
8. Focus-
9. Source key
10. Confirmation key
11. Menu
12. Setup
13. Mute Key
14. Volume+
15. Focus+
16. Auto Focus

Switching Machine Operation


Power On:

- Step1: Press the power button on the body or the power button on the remote control, the indicator light will turn blue and steady.
- Step2: After 2 seconds, the projector starts to start, the image appears on the screen, and the unit enters the normal working state.
- Step3: If the projector is newly installed, the image may be blurred or trapezoidal distortion when it is turned on for the first time. Please refer to the “Focus/Keystone Correction” section for calibration.
- Step4: After the image is adjusted clearly, it can be viewed normally!

In the working state, press the power button on the body or remote control to switch the projector to standby. The indicator light changes from blue to red.

Power Off:

- Step1: In the working state, press the power button of the body or the power button on the remote control to switch the projector to the standby state.
- Step2: After the projector enters into the standby state, the machine is in the process of automatic heat dissipation, and the indicator light will change from blue to red.

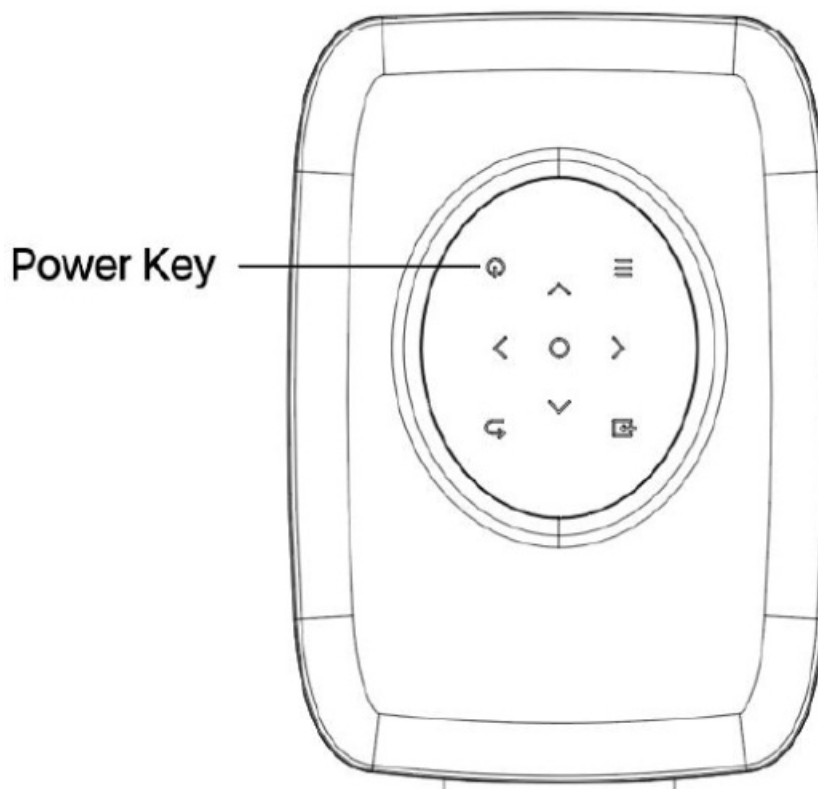


Please connect the power cord to the projector before connecting the power cord to an electrical outlet.

Contents

Refer to the data in the table below to place the projector away from the projection screen according to the preset graphic size. When installing place the projector on a solid, stable countertop , The airframe should be well


ventilated. Do not cover or block the vents, There should be no obstructions within 30cm of the vents.

Aspect Ratio	16:9
Picture Size (inch)	Projection Distance (m)
50	1.58
70	2.13
100	3.05
120	3.56
150	4.41

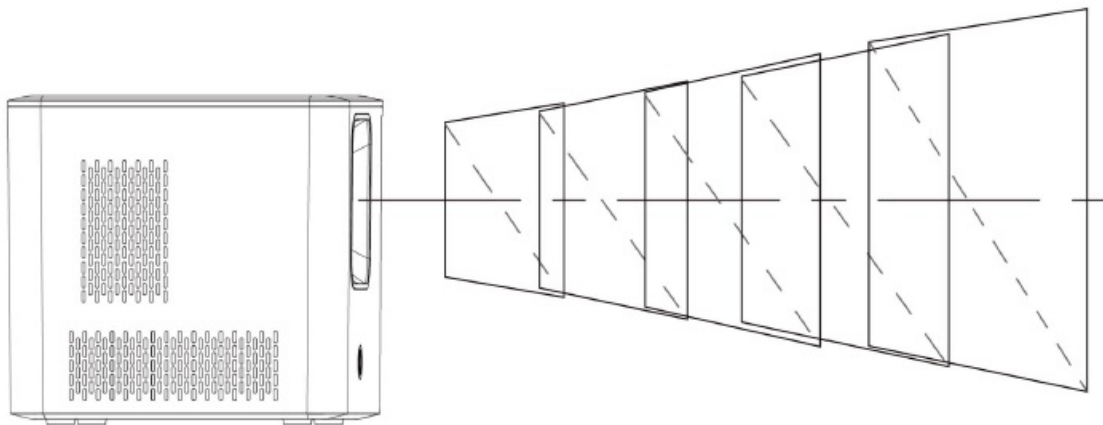

Note: The above data is for reference only, please refer to the physical measurement.

Bluetooth Voice Adaptation

- Step 1: Please press and hold the voice key 
- Step 2: Please press and hold <+> at the same time to enter the Bluetooth pairing mode of the remote control
- Step 3: Wait for the light of the remote control to flash and wait for Bluetooth to pair automatically
- Step 4: If the connection status does not indicate a successful connection, please repeat steps 1 and 2




Instructions for use

When the remote control Bluetooth is not connected, all the buttons of the remote control are infrared Key value
After the Bluetooth connection of the remote control is normal, all keys pass through the receiving module Upload to the terminal device via Bluetooth

Use of the Projector


How to Connect to WiFi

- Step 1: Select” Setting”–“Network”–“Wi-Fi” of the main interface.
- Step 2: Search for WiFi, select the WiFi that needs to be connected, enter the password through the virtual button, and confirm.

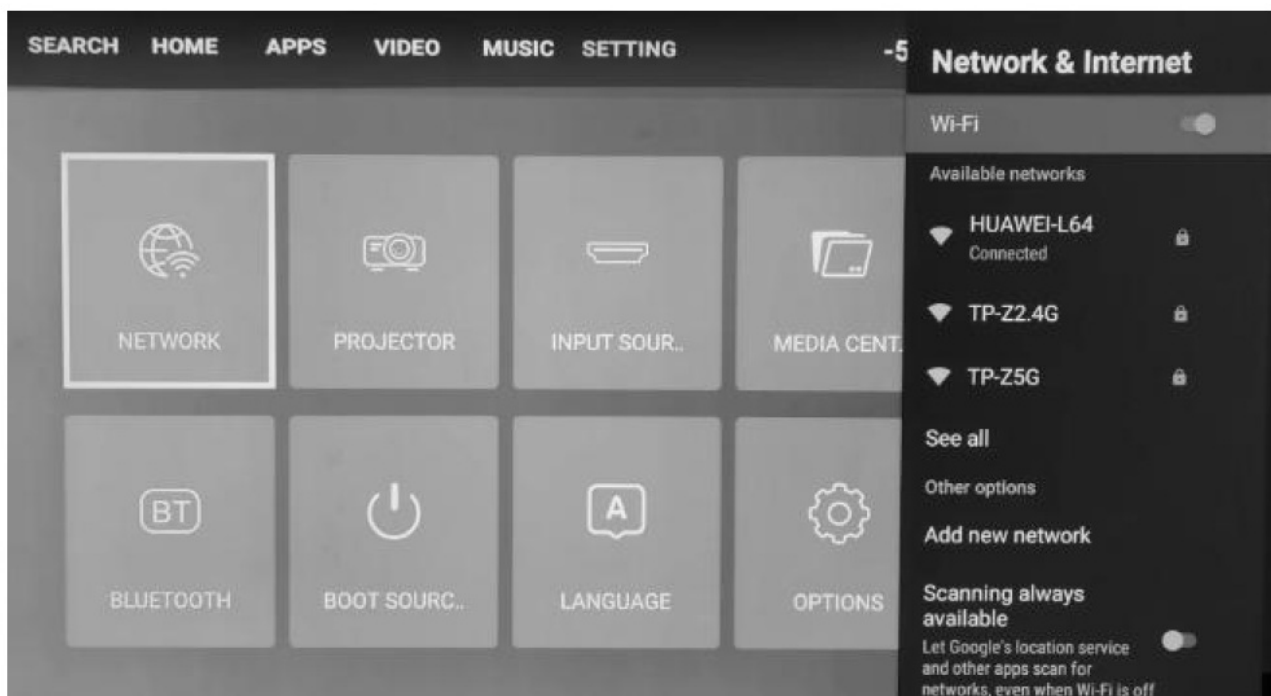

How to Connect Bluetooth Device

- Step 1: Select” Setting”–“Network”–“Bluetooth” of the main interface.
- Step 2: Turn on Bluetooth, search for the device, and connect the device you need.

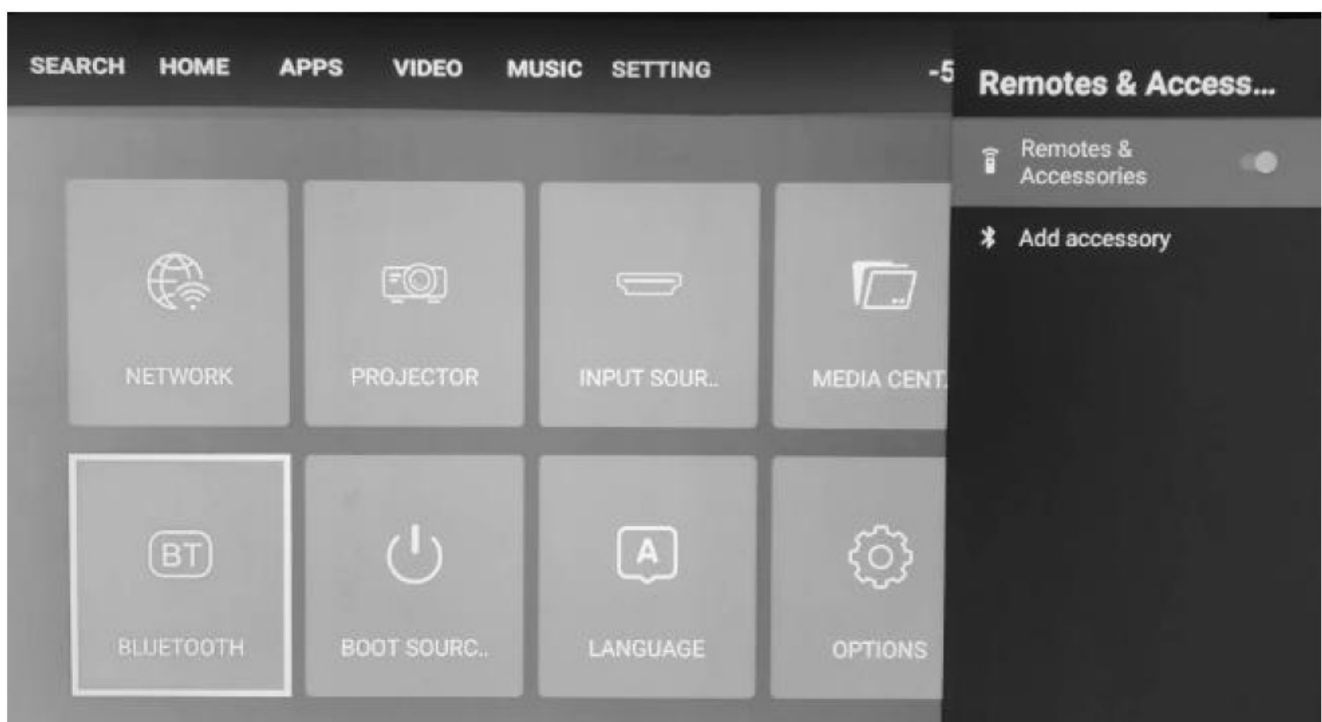

How to Select the Signal Source

- Step 1: Select” Setting”–“INPUT SOURCE” of the main interface.
- Step 2: In the signal source option, select the signal source you need and confirm the connection.



How to Read Files on U Disk


- Step 1: Select "Setting—"MEDIA CENT..." of the main interface.
- Step 2: After entering the interface, then select your U disk, find the file you want to view in the classification to play.



Use of the Projector


How to Download App

- Step 1: Select "APPS"—"App Store" of the main interface.
- Step 2: Enter the interface and download the app you need.

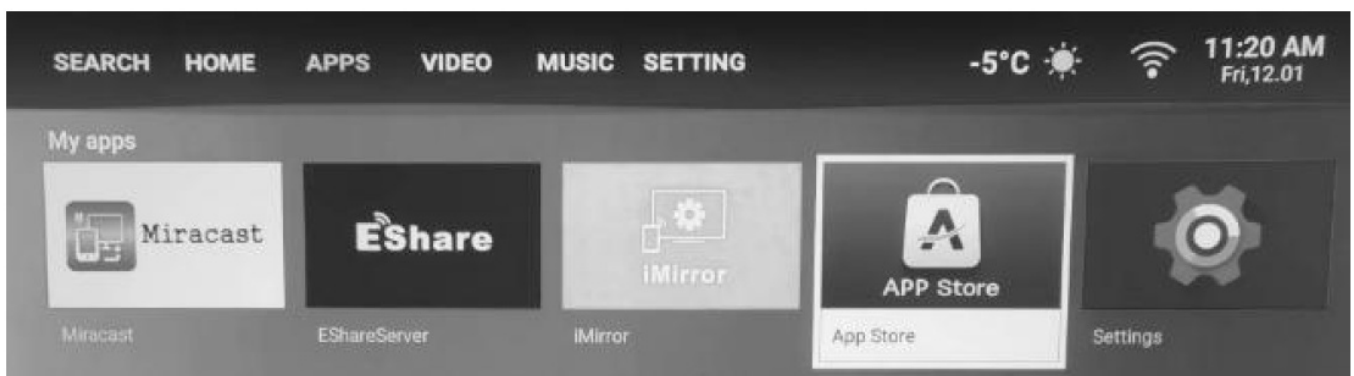

How to Wireless Projection Screen

- Step 1: Built-in miracast, imirror, eshare protocols. Support Android and Apple devices wireless screen projection, mirroring
- Step 2: Select V7-HIDMR projection for mobile phone or tablet and V7-xxxx image.

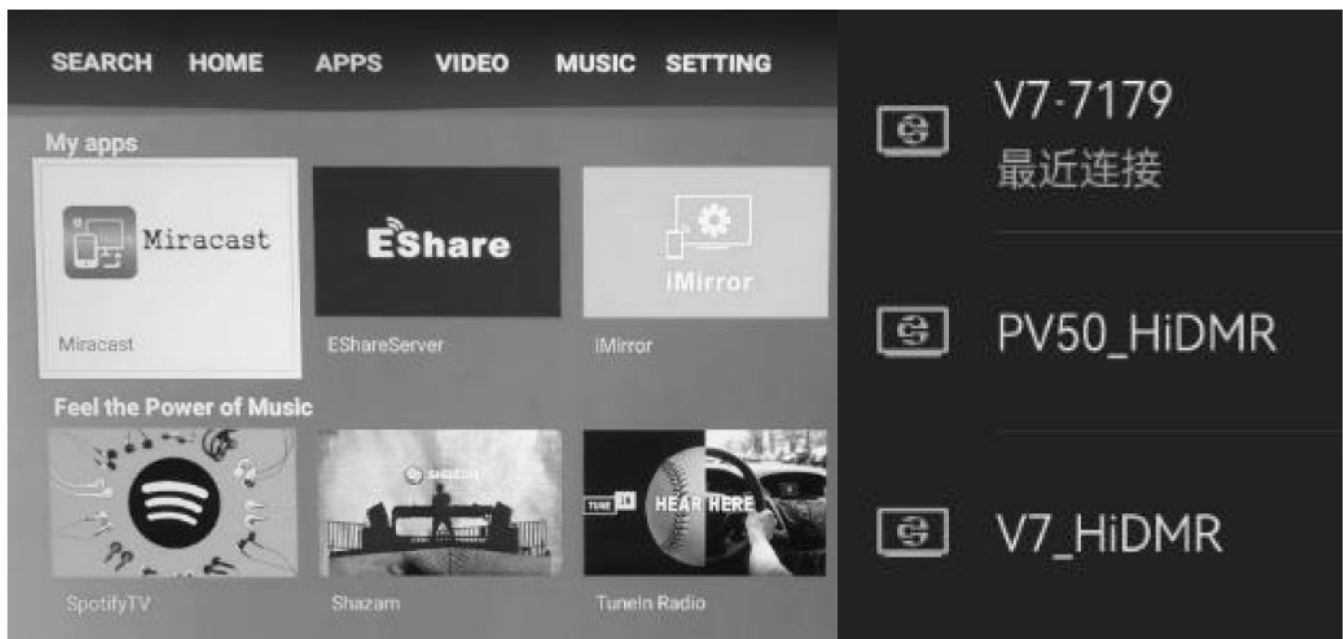


How to Projection Settings

- Step 1: Select "SETTING"—"PROJECTION" of the main interface.
- Step 2: After entering the interface, select the mode you want in the projection settings.




Projection Settings—Flip

4 projection modes, adjust the appropriate display mode according to the environment, the default front mode.

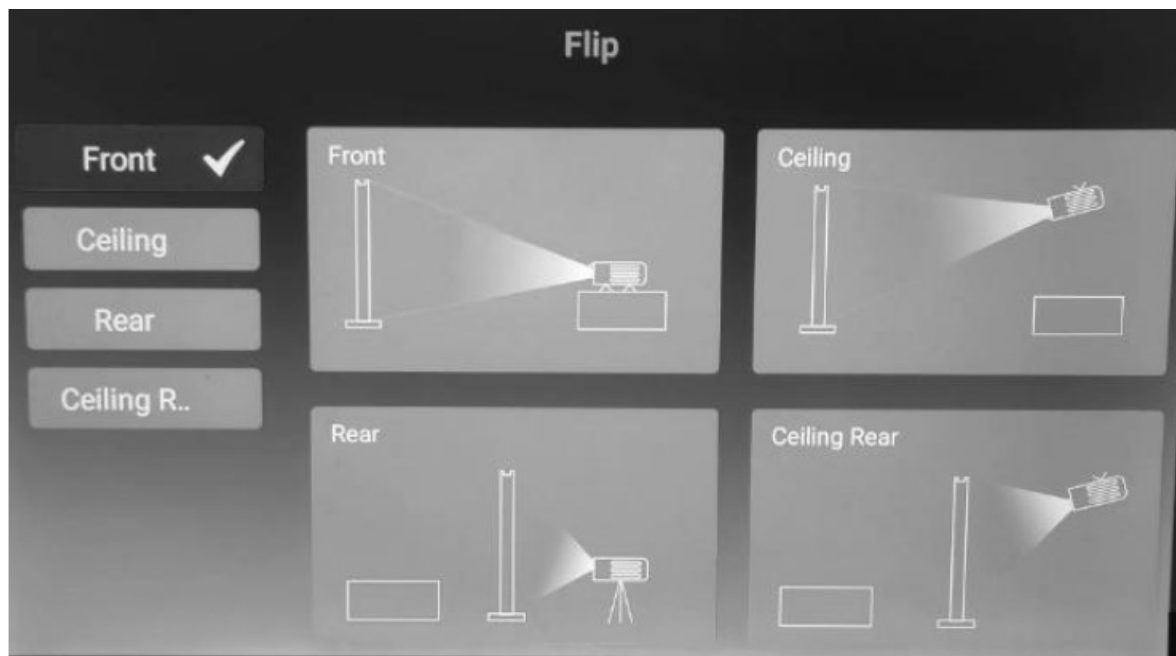


Projection Settings–Electronic Scaling

Press the left or right button to adjust the screen, and long press MENU to correct and reset.

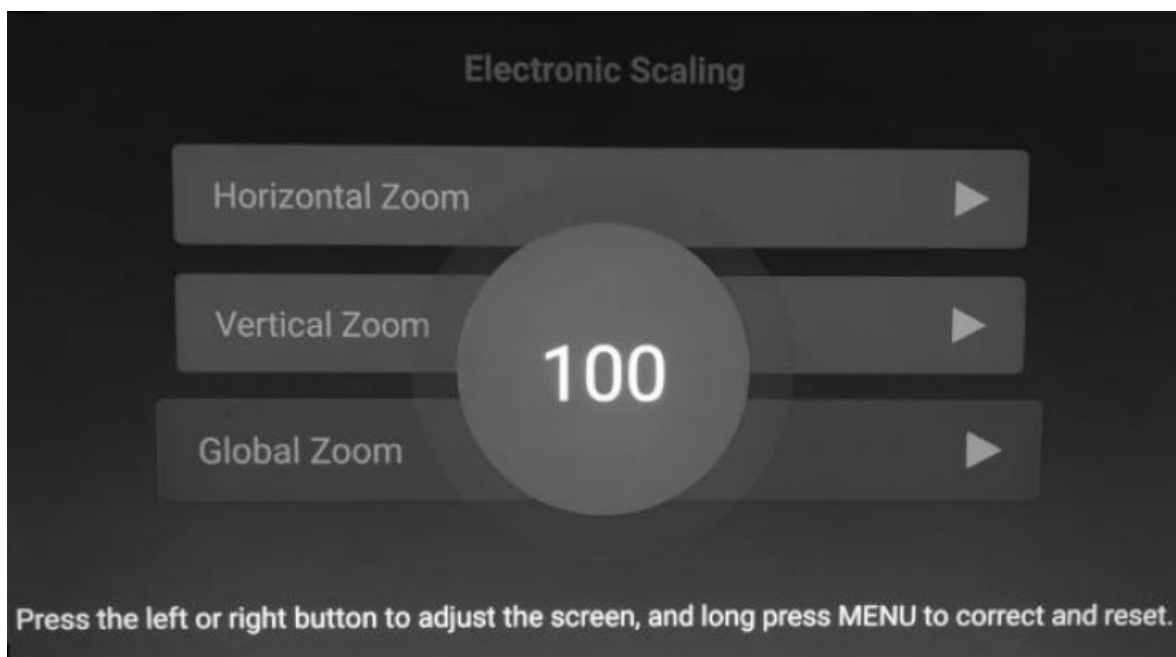

Projection Settings–Electronic Trapezoid


Manual focusing Long press the menu key to restore the initial state, and press the Ok key to switch the adjustment focus Press the direction key to adjust the screen.

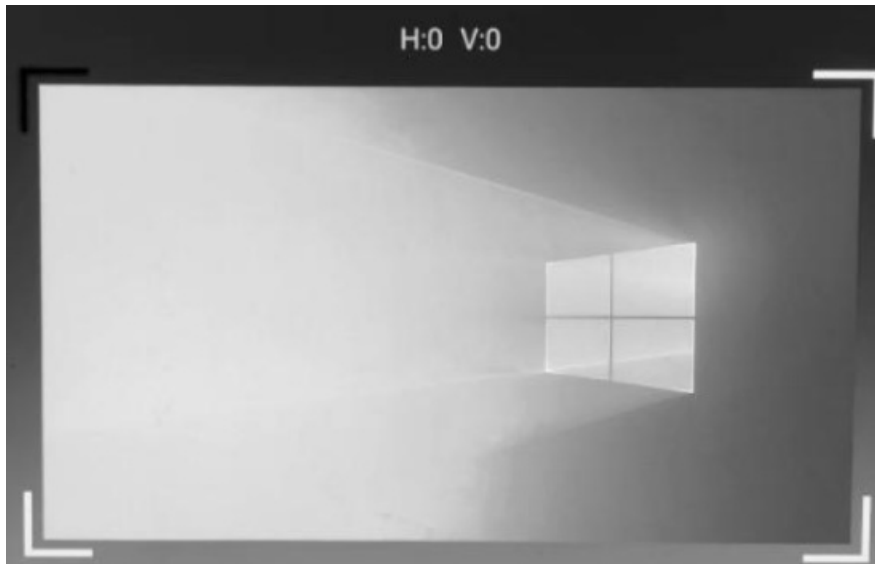

Long press the menu key to restore the initial state, and press the OK key to switch the adjustment focus. Press the direction key to adjust the screen.

Projection Settings–Omnidirectional Correction

- Auto Focus: When this function is turned on, the device will automatically focus to keep the picture clear after the distance of the device is displaced.
- Auto Trapezoid: This function is turned on, and the screen can be kept square even after the device is displaced.
- Automatic obstacle avoidance: This function is turned on, it will help the projector avoid the obstacles in the front of projection screen to get a perfect image.
- Automatic entry into the curtain: When this feature is turned on, the image size will be compressed to the same size as the curtain (the curtain must have a black border).

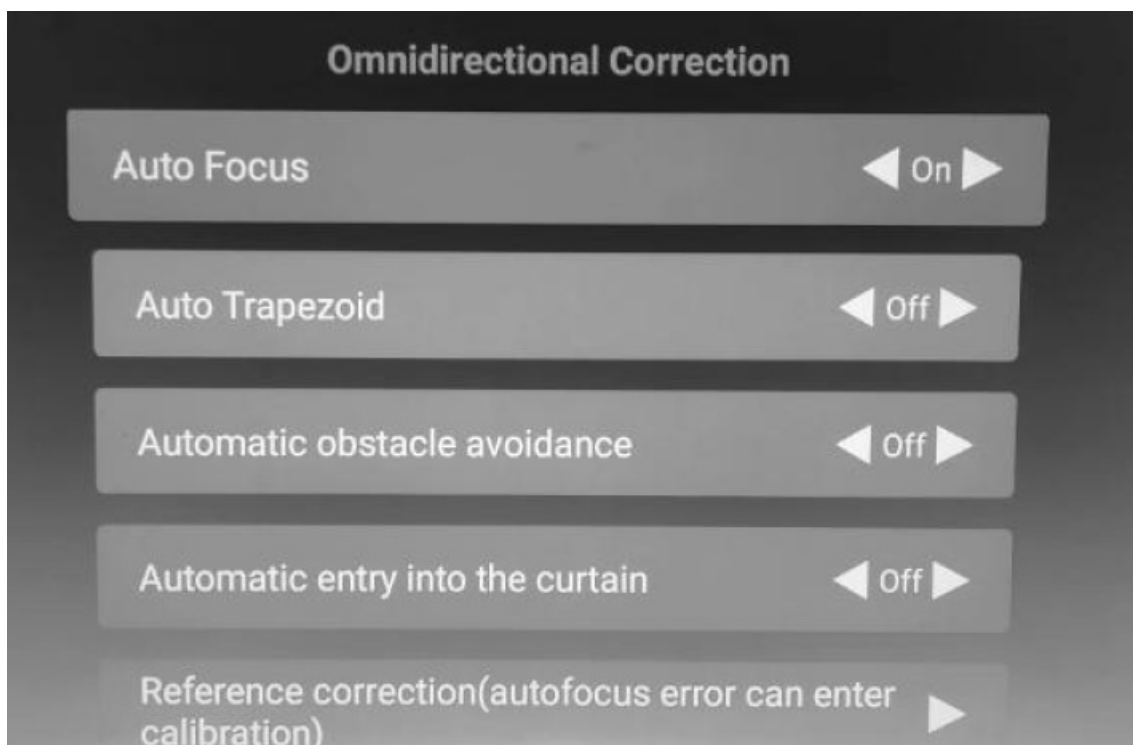

FCC WARNING

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

Frequently Asked Questions (FAQ)

- **Q: What should I do if the projector is not working?**

A: If the projector is not functioning properly, please contact the authorized service agent for assistance.

- **Q: Can I disassemble the unit myself?**

A: No, disassembling the unit yourself will void the warranty. Please avoid doing so.

- **Q: How do I power off the projector?**

A: To power off the projector, first connect the power cord to the projector before plugging it into an electrical outlet.

Documents / Resources

	<p>Generic V7 Portable 3D Android WiFi Mini DLP Projector [pdf] Instruction Manual V7 Portable 3D Android WiFi Mini DLP Projector, V7, Portable 3D Android WiFi Mini DLP Projector, 3D Android WiFi Mini DLP Projector, Mini DLP Projector, DLP Projector, Projector</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.