



GENESIS THOR 660 Wireless Mechanical keyboard Installation Guide

[Home](#) » [Genesis](#) » GENESIS THOR 660 Wireless Mechanical keyboard Installation Guide 

GENESIS THOR 660 Wireless Mechanical keyboard Installation Guide



Contents

1

PRODUCT

INFORMATION

2

INSTALLATION

3

SAFETY INFORMATION

4

GENERAL

5

Documents / Resources

5.1


References

6


Related Posts

PRODUCT INFORMATION


PACKAGE CONTENT

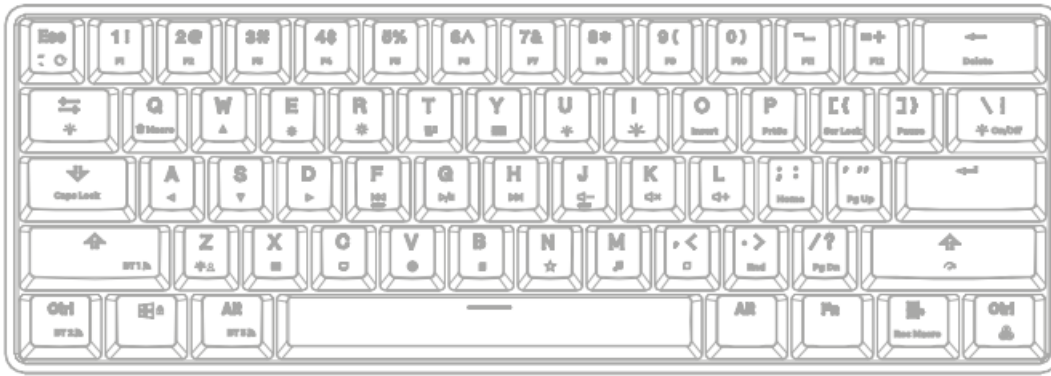

a)

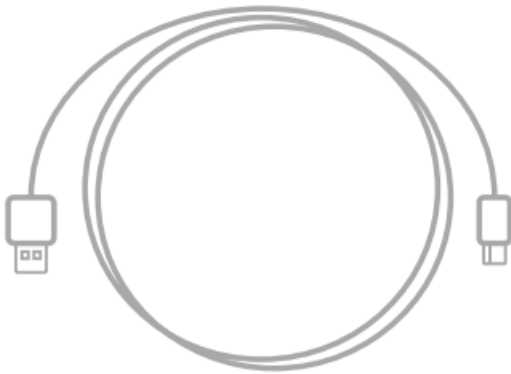

b)

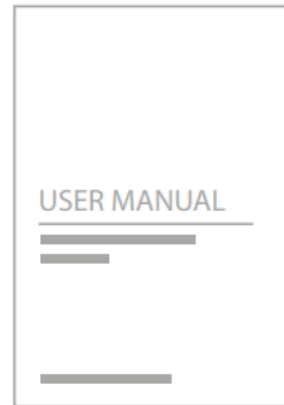

c)

REQUIREMENTS

Device equipped with USB port or Bluetooth function
Windows® XP/Vista/7/8/10, Linux, Android

INSTALLATION

Pairing a new device with keyboard in Bluetooth mode

- Move the ON/OFF switch located at the bottom of the keyboard to ON position
- Turn ON Bluetooth in device which you want to pair with the keyboard
- Hold the keys FN + BT1 | BT2 | BT3 for 5 seconds to enter into pairing mode. The LED diode will start flashing rapidly
- Then go to the Bluetooth settings on your device and select from the list Thor 660
- After successful pairing, the LED on the keyboard will stop flashing
- The keyboard is ready for use.

Note: The keyboard can be paired with up to 3 devices, that you can switch by pressing the keys FN + BT1|BT2|BT3.

Connecting the keyboard with the previously paired device

- Turn ON Bluetooth on your device that you have previously paired with the keyboard
- Turn ON or wake up the keyboard from hibernation

- Select required device by short press FN + BT1|BT2|BT3
- The keyboard will automatically connect with the device

Note

- The device is equipped with intelligent technology for energy management. When the keyboard enter into hibernation (sleep) mode, press any key for its revival.
- The keyboard is equipped with an ON/OFF switch to save the battery power when not in use for longer period.

Wired connection via USB cable

- Move the ON/OFF switch located at the bottom of the keyboard to OFF position
- Turn ON your computer or other compatible device
- Connect the cable to a free USB port on your computer, it is necessary to wait about 15 seconds for the first connection until the drivers are fully installed.
- The keyboard includes software that allows you to set up advanced features, if you want to use these features, you need to download and install the software from our website www.genesis-zone.com
- Open the installation folder and then double-click the setup.exe file.
- Follow the instruction to install the program.
- After a successful installation, the software icon appears on the main bottom panel. Double-clicking the icon opens the settings interface.

Note: The software communicates with the keyboard only through the USB cable. All saved settings will be stored in the keyboard memory even after disconnecting the cable and switch to wireless mode.

CHARGING THE BATTERY

- Connect the included USB-C cable to the keyboard
- Connect USB plug to a suitable power source (max. output DC 5V 0,5A)
- When the battery is fully charged, the LED located under left shift will change to green color.

Note: When the battery reach the low level the FN key will starts flashing, then the keyboard will enter into energy saving mode and turn off the backlight.

Caution: Please charge the battery every 3 months, if you do not use the keyboard for a long time. Long-term storage of the keyboard with low battery level, or using the chargers with power over 5V 0,5A may damage the battery.

1. ARROW FUNCTION CHANGE

Hold keys FN + W for 3 seconds to swap arrow function with W, A, S, D keys function.

2. BACKLIGHT MODE CHANGE

Press the keys FN + TAB to change between 19 backlight modes.

3. BACKLIGHT BRIGHTNESS

To change the backlight brightness level press keys FN + U/I.

4. BACKLIGHT COLOR CHANGE

To change the backlight color, press keys FN + right CTRL

5. SPEED OF BACKLIGHT EFFECTS

To change the speed of backlight effects press keys FN + Right Shift

6. CUSTOM BACKLIGHT MODE

This mode allows to set individual illumination of each key.

To select custom backlight mode shortly press FN + Z.

Setting of custom backlight

- Select custom backlight mode by short press FN + Z
- Then hold the keys FN + Z for about 5 seconds to enter into recording mode
- Press requested key 1-8 times to select one of eight predefined colors
- Press the keys FN + Z to exit from recording mode and save settings

7. RECORDING MACROS ON-THE-FLY

This function allows to assign a macro for key A only.

- Hold the keys FN + Rec Macro for 5 seconds to enter into recording mode
- Press the combination of keys which you want to record
- Short press FN + Rec Macro to exit from recording mode and save settings

Note: You can remove the Macro settings by holding the keys FN + Q.

HOT KEYS

- a. FN + BT1 Bluetooth device 1
- b. FN + BT2 Bluetooth device 2
- c. FN + BT3 Bluetooth device 3
- d. FN + W Swap arrow function with W, A, S, D keys (hold for 3 seconds)
- e. FN + Rec Macro Recording macro On-the-Fly (available only for key A)
- f. FN + Q Remove macro settings (hold for 5 seconds)
- g. FN + F1-F12 Function keys F1-F12
- h. FN + ESC Restore factory settings (hold for 5 seconds)
- i. FN + Backspace Delete
- j. FN + O Insert
- k. FN + P Print screen
- l. FN + [Scrol lock
- m. FN + ; Home
- n. FN + . End
- o. FN + ‘ “ Page up
- p. FN + / Page down
- q. FN + E Display brightness Down (available for MAC only)
- r. FN + R Display brightness Up (available for MAC only)
- s. FN + T Switch between active programs (available for MAC only)
- t. FN + Y Shows the list of active programs (available for MAC only)


I



BACKLIGHT SETTINGS

- a. FN + TAB Backlight mode change
- b. FN + U/I Change backlight brightness
- c. FN + right CTRL Change the backlight color
- d. FN + right Shift Speed of backlight effects
- e. FN + Z Custom backlight mode
- f. FN + \ On/Off backlight

II

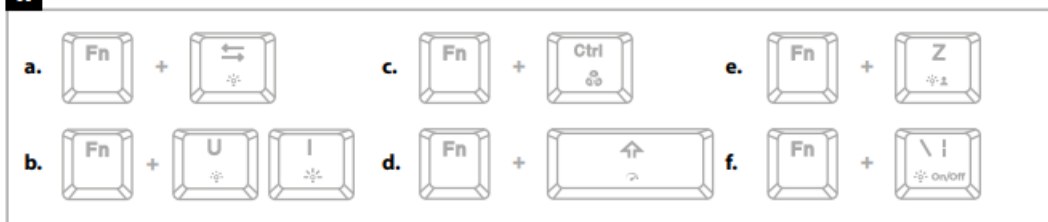


MULTIMEDIA KEYS

- a. FN + F Previous
- b. FN + G Play/Pause
- c. FN + , Stop
- d. FN + H Next
- e. FN + J Volume down
- f. FN + K Volume up
- g. FN + L Mute
- h. FN + X Email
- i. FN + C My computer

- j. FN + V Internet browser
- k. FN + B Calculator
- l. FN + N Favorites
- m. FN + M Media player

III

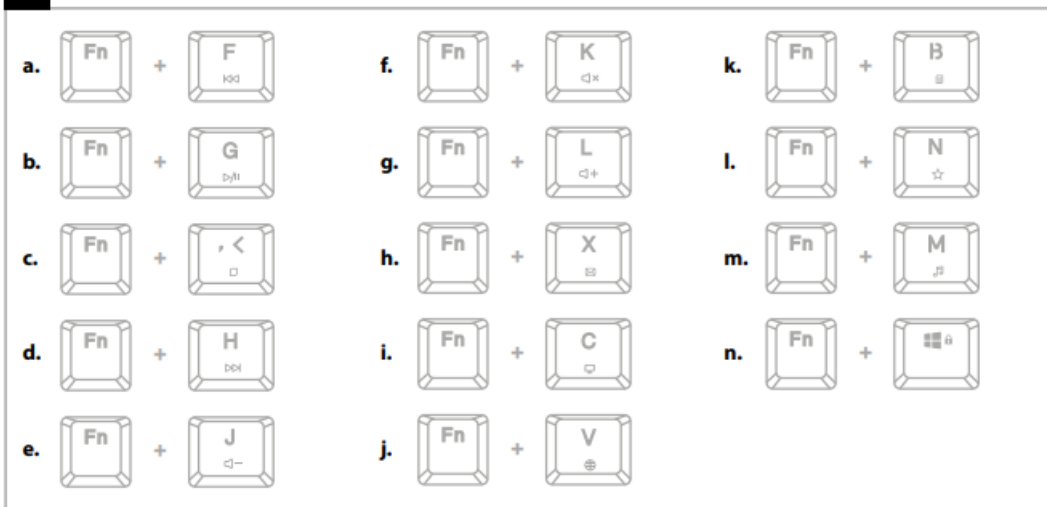

SAFETY INFORMATION

- Use as intended, improper usage may break the device.
- Non-authorized repairs or disassembly voids the warranty and may damage the product.
- Dropping or hitting the device may lead to device being damaged, scratched or flawed in other way.
- Do not use the product in low and high temperatures, strong magnetic fields and damp or dusty surroundings.

GENERAL

- The safe product, conforming to the EU requirements.
- The product is made in accordance with RoHS European standard.
- 2 years limited manufacturer warranty



EU Declaration of Conformity – Hereby, IMPAKT S.A. declares that that the equipment type NKG-1844, NKG-1845 is in compliance with Directives 2014/53/EU, 2011/65/EU and 2015/863/EU. The full text of the EU declaration of conformity is available via the product tab at www.impakt.com.pl.

Frequency range	2402 MHz – 2480 MHz
Maximum radio-frequency power transmitted	1,87 dBm



The WEEE symbol (the crossed-out wheeled bin) usage indicates that this product is not a household waste. Appropriate waste management aids in avoiding consequences, which are harmful for people and environment and result from dangerous materials used in the device, as well as, improper storage and processing of such equipment. Segregated household waste collection allows recycling of materials and components of which the device was made of. In order to get detailed information about recycling of this particular product, please contact your retailer or a local authority.

DOWNLOAD SOFTWARE ON OUR WEBSITE


<http://www.genesis-zone.com/support>




PRODUCT & SUPPORT INFORMATION

© GENESIS. All rights reserved. GENESIS name and logo, and all related product and service names, design marks and slogans are the trademarks or registered trademarks of GENESIS.
All other product and service marks contained herein are the trademarks of their respective owners. | V.1260

<http://www.genesis-zone.com/>



Documents / Resources

	GENESIS THOR 660 Wireless Mechanical keyboard [pdf] Installation Guide THOR 660 Wireless Mechanical keyboard, THOR 660, Wireless Mechanical keyboard
-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [Genesis | Complete solutions for gamers - mice, keyboards, headphones and other devices](#)
- [Computer accessories and peripherals, gaming accessories, networking solutions and consumer electronics | impakt.com.pl](#)
- [Genesis | Complete solutions for gamers - mice, keyboards, headphones and other devices](#)
- [Support | Genesis](#)

- [!\[\]\(eae20f1adff742df783f6f7e3bbe72d1_img.jpg\) Producent i dystrybutor sprzętu IT | IMPAKT S.A.](#)
- [!\[\]\(43c6e08c5a1618d745b54da5c843274e_img.jpg\) MSN Games - Free Online Games](#)

Manuals+.