


## **Godox LMD-40C Dual Omnidirectional Lavalier Microphone Instruction Manual**

Home » Godox » Godox LMD-40C Dual Omnidirectional Lavalier Microphone Instruction Manual





LMS-60C **Omnidirectional Lavalier Microphone** 

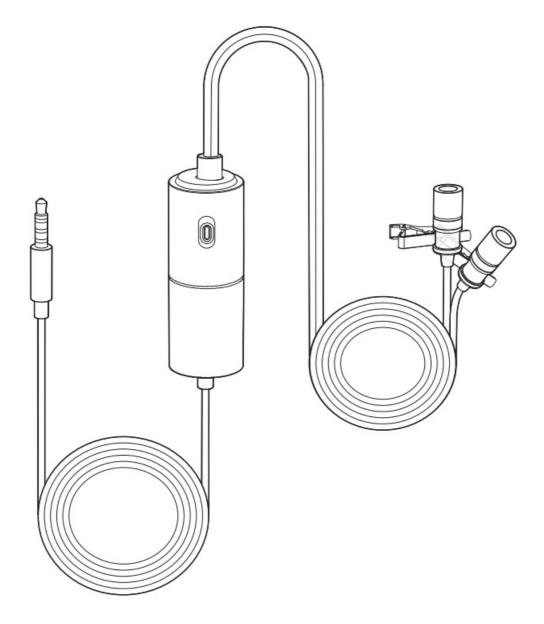

## **Instruction Manual**

## **Contents**

- 1 Forward
- **2 Product Features**
- 3 Warning
- **4 Product Description**
- 5 What's Inside
- **6 Operation**
- 7 Technical Data
- 8 Frequency Response
- Graph
- 9 Directivity Graph
- 10 Maintenance
- 11 Warranty
- 12 Documents / Resources
- **13 Related Posts**

## **Forward**

Thank you for purchasing Godox Omnidirectional Lavalier Microphone LMS-60C. This product is consists of one omnidirectional microphone with a 6-meter cable. This omnidirectional microphone is perfect for interviews, video

recordings, Livestream, program presentation, etc. It can be applied on smartphones, cameras, camcorders, sound recorders, computers, or more video & audio recording equipment. Please read this manual carefully before using it to make sure the correct operation and exert the optimum function.

## **Product Features**

- 1. Compact and lightweight with great portability.
- 2. Powered by an LR44 button cell.
- 3. Microphone body is made of aluminum, which is durable and delicate.
- 4. With specially made acoustic windscreen to reduce noise and make the sound more soft and graceful.
- 5. One-piece design which can be used directly.

## Warning

Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.



Always keep this product dry. Do not use in rain or in damp conditions.



Keep out of reach of children.

Do not use the flash unit in the presence of flammable gas. In certain circumstances, please pay attention to the relevant warnings.




Do not leave or store the product if the ambient temperature reads over 40°C



Please carefully read and observe the warnings and instructions provided by the manufacturer.

## **Product Description**

- 1. Omnidirectional Microphone
- 2. Camera Recording Mode /Smartphone Recording Mode (switch to off)
- 3. 3.5mm TRRS Connector (supports TRRS and TRS port. Smartphones or parts of computer use TRRS port while the camera or other audio equipment use TRS port)
- 4. Clip

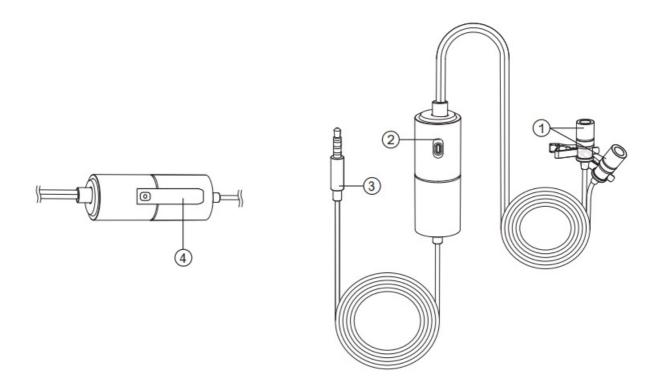

## What's Inside

Windscreen Foam *2			
Collar Clip *2			
Velcro Tape *2			
6.5mm to 3.5mm Audio Connector *			
LR44 Button Battery *1			
Portable Bag *1			
Instruction Manual *1			


## Operation

- 1. This product can be used directly, which is compatible with a variety of equipment.
- 2. Please fix the microphone onto your clothes which are 20 centimeters far away from your face.
- 3. It is recommended to use a windscreen all the time to avoid wind noise.

## Being used on a smartphone

- 1. Turn the power switch of LMS-60C to OFF/Smartphone(please set the microphone to this step, otherwise, recording cannot be carried out).
- 2. Insert a 3.5mm TRRS connector into the audio port of the smartphone (use a converted cable if the smartphone does not have a 3.5mm port).
- 3. Open the audio or video recording applications to start recording.


**Note:** When being used on a smartphone, there is no need to install the battery.

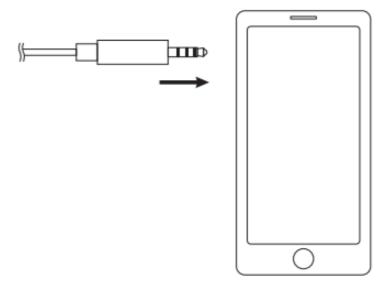

## Being used on camera


- 1. Battery should be installed.
- 2. Turn the power switch of LMS-60C to the Camera (please set the microphone to this step, otherwise, recording cannot be carried out).
- 3. Insert 3.5mm TRRS connector into the microphone input port of DSLR camera and camcorder. Then, start shooting.

Note: please make sure the used equipment has a microphone or not. Please verify this with the equipment's manufacturer.

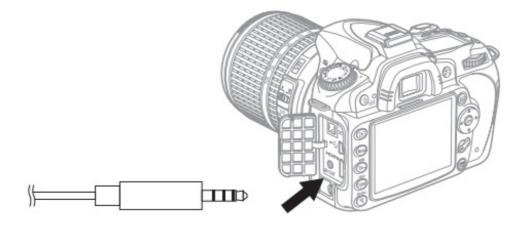

## **Battery Replacement**


- 1. Open the battery compartment.
- 2. Take out the old battery and replace it with a new one. Please note the directions of battery anode and cathode

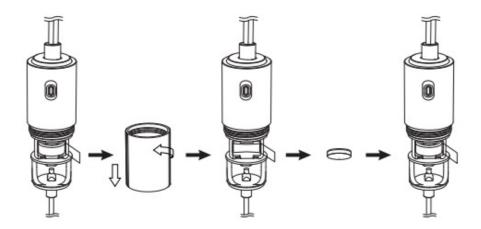


## **Technical Data**

Model	LMS-60C	
Туре	Capacitive (electret)	
Plug	3.5mm TRRS Connector	
Pick-up sound mode	Omnidirectional	
Peak Sound Pressure Level	120dB (THD≤5% @1KHz)	
Frequency Range	20Hz-20KHz	
Sensitivity	-32±2dB (OdB=1V/Pa @1KHz)	
Signal Noise Ratio	74dB	
Working temperature	-10 C-50 C	
Battery	LR44 Button Battery	
Length/Weight	6m / 52g (battery is included)	
Material	Aluminum in grey	

# Frequency Response Graph

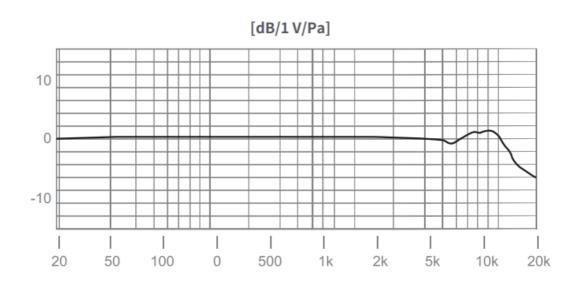

## **Directivity Graph**

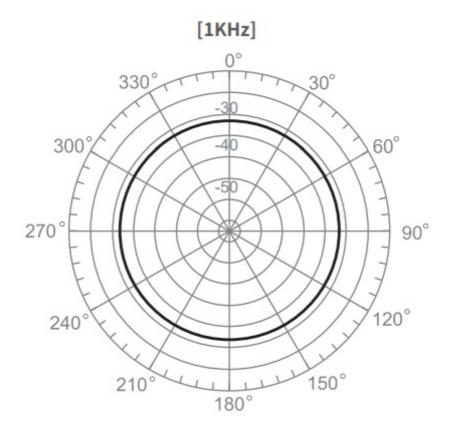

#### **Maintenance**

Avoid sudden drops. The device may fail to work after strong shocks, impacts, or excess stress.

Keep dry. The product isn't water-proof. Malfunction, rust, and corrosion may occur and go beyond repair if soaked in water or exposed to high humidity.

Keep away from a strong magnetic field. The strong static or magnetic field produced by devices such as radio transmitters leads to malfunction.

This product belongs to consumables and does not support a one-year warranty.

If the product had failures or was wetted, do not use it until it is repaired by professionals.

Changes made to the specifications or designs may not be reflected in this manual.

## Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number		
Customer Information	Name	Contact Number		
Customer information	Address			
Seller Information	Name			
	Contact Number			
	Address			
	Date of Sale			
Note				

Note: This form shall be sealed by the seller.

#### **Applicable Products**

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways, and additional accessories attached, etc.) are not included in this warranty scope.

## **Warranty Period**

The warranty period of products and accessories is implemented according to the relevant Product MaintenanceInformation. The warranty period is calculated from the day(purchase date) when the product is bought for the first time, And the purchase date is considered as the date registered on the warranty card when buying the product.

#### **How to Get the Maintenance Service**

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide a valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

### **Inapplicable Cases**

The guarantee and service offered by this document are not applicable in the following cases: 1. The product or accessory has expired Its warranty period; 2. Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging In/out external equipment, falling off or squeezing by an external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding, and damp environments, etc; 3. Breakage or damage caused by the non-authorized institution or staff In the process of installation, maintenance, alteration, addition, and detachment; 4. The original identifying information of product or accessory is modified, alternated, or removed; 5.No valid warranty card; 6. Breakage or damage caused by using illegally authorized, nonstandard, or non-public released software; 7. Breakage or damage caused by force majeure or accident; 8. Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories, and software beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion, and consumption are not the breakages within the maintenance scope.

## **Maintenance and Service Support Information**

The warranty period and service types of products are implemented according to the following **Product Maintenance Information**:

Product Ty pe	Name	Maintenance Perio d(month)	Warranty Service Type
Parts	Product Main Body	12	Customer sends the product to a de signated site
	Battery	3	Customer sends the product to the designated site
	Charger, Power Cable, Sync Cable, El ectrical Parts, etc.	12	Customer sends the product to the designated site
Other Item s	Battery Case, Windproof Sponge, Win d Cap, Locking Device, Lanyard, Tie, Velcro Tape, Clip, Bag, Package, etc.	No	Without warranty

Godox After-sale Service Call 0755-29609320-8062



Follow Wechat Public Account
<a href="http://weixin.qq.com/r/vEPI0F7ERgM5rRqz9xau">http://weixin.qq.com/r/vEPI0F7ERgM5rRqz9xau</a>
QC PASS

GODOX Photo Equipment Co., Ltd.
Add: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

Tel: +86-755-29609320(8062) Fax: +86-755-25723423

E-mail: godox@godox.com godox.com Made In China



# Godox LMD-40C Dual Omnidirectional Lavalier Microphone [pdf] Instruction Manual LMD-40C, Dual Omnidirectional Lavalier Microphone

Manuals+,