

GoveeLife H5125 Smart Button Remote User Manual

Home » GoveeLife » GoveeLife H5125 Smart Button Remote User Manual



Contents

- 1 GoveeLife H5125 Smart Button
- Remote
- 2 Included in the Box
- 3 Introduction
- **4 Part Names**
- **5 Controls**
- **6 Functions**
- 7 Indicator Status
- **8 Getting Started**
- 9 Pairing with the Govee Home App
- 10 Troubleshooting
- 11 For Govee Smart Button Remote
- 12 Appendix
- 13 Specifications
- 14 Documents / Resources
 - 14.1 References
- **15 Related Posts**



GoveeLife H5125 Smart Button Remote



Included in the Box

Item/Quantity

• Smart Button Remote: 1

• CR2032 Battery: 1 (Pre-Installed)

• Lanyard: 1


• User Manual: 1

Introduction

The Govee Smart Button Remote supports six independent single clicks to trigger actions. Based on Bluetooth communication with Govee's unique distributed gateway, it can transfer the signal by clicking the button as a condition to trigger automation and execute commands from other Govee products to achieve multiple intelligent scenarios.

Part Names

- a. Indicator Light
- **b.** Button
- c. Hanging Hole
- d. Remote Cover
- e. Open Slot
- f. Battery
- g. Insulation Sheet

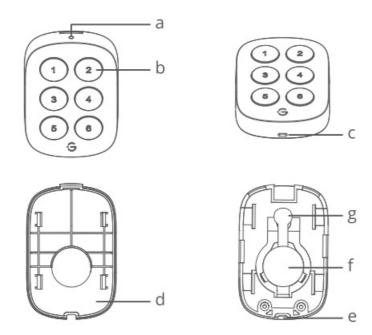

Controls

Long press to set the function

Press and hold Button 1 for 5 seconds. When the indicator light keeps flashing (for 1 minute), it means that the device has entered the Bluetooth Broadcast Mode. Please follow the in-app instructions to complete pairing.

Note: The broadcast will last for 30 seconds and then stop. Or you can choose to exit the Bluetooth Broadcast Mode by clicking Button 1.

Functions

Single-click to trigger function

After completing the pairing and function settings, click any button. When the indicator light flashes red once, it means the signal is already sent, and your instruction is triggered. You can follow the in-app instructions to complete the function settings.


Note: Please do not quickly press the same button. There should be a 1.5-second gap between two successive clicks of the same button.

Indicator Status


Indicator	Working Status	Light Status
((ic	Stand By/Running Out of Battery	Light Off
	Bluetooth Broadcasting	Flashes Red
	Signals Sent Successfully	Flashes Red Once

Getting Started

1. Open the packaging. Open the bottom cover from the open slot as shown in the picture. Pull out the insulation sheet and tighten the bottom cover up.

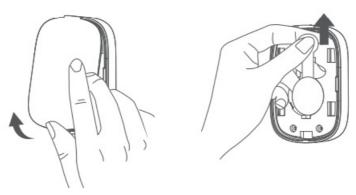

2. 2. Press and hold Button 1 for s seconds to enter the pairing mode. Please follow the in-app instructions to complete pairing.



Note: For downloading the Govee Home App and detailed pairing steps, please refer to: Govee Home App → Downloading the Govee Home App & Pairing with the Govee Home App.

3. Effective Communication Distance Verification: After completing the pairing, you can verify it in the app.

Note:

- To fix the product on the surface, it is recommended to tear off the included adhesive tape to stick it to the bottom of the base, then tear off the liner and fix the product to the surface.
- Please ensure the surface is clean and dry.
- For indoor use only.

Govee Home App

You can access more features using the Govee Home App.

Downloading the Govee Home App

To download the Govee Home App, scan the QR code or search for "Govee" in the Apple App Store® (iOS) or Google Play Store (Android).





Note:

- Choose "Allow" for the permissions requested when opening the Govee Home App for the first time. These permissions allow the app's features to function normally and are not used to record personal, private information.
- Due to ongoing updates, the Govee Home App may be slightly different than shown in this manual. In case of

any differences, always follow the in-app instructions.

Pairing with the Govee Home App

- 1. Turn on your smartphone's Bluetooth.
- 2. Open the Govee Home App, tap the"+" icon in the top right corner, and search for "H5125."
- 3. Tap the device icon and follow the on-screen instructions to complete the pairing.

Note: Govee Home App is being continually updated and its features do expand.

Troubleshooting

The troubleshooting section below is for solving frequently asked questions. If your problem persists, please contact Customer Support.

For Govee Smart Button Remote

Problem

The indicator light turns off.

Solution

- 1. Replace with a new battery.
- 2. Contact customer service.

Problem	Solution
Triggering signals cannot b e detected.	 Check the device battery and make sure it is fully charged. Open the app and ensure the device and the distributed gateway are in the effe ctive communication distance. Contact customer service.
Low battery alert from the app.	Change the battery.

For App & Connectivity

- 1. Cannot connect to the Govee Home App.
 - 1. Make sure your smartphone is powered on and is not connected to other Bluetooth devices.
 - 2. Enable the smartphone's Location Services.
 - 3. Try connecting with another smartphone.
 - 4. Make sure your app is updated to the latest version.

- 5. Make sure you connect to your Wi•Fi router's 2.4GHz network and that the network is working correctly.
- 6. Make sure the Wi-Fi password you entered is correct.
- 7. Shorten the distance between the sensor, distributed gateway, and the smartphone.
- 8. Make sure your sensor and the distributed gateway are located away from appliances that produce electromagnetic radiation (e.g. microwave ovens, refrigerators, etc.)
- 9. If you are using a VPN, try turning it off and then connecting the sensor.
- 10. Disable portal authentication for your Wi-Fi network. If portal authentication is enabled, this sensor will not be able to access your Wi-Fi network, and the setup will fail. Portal authentication means that you need to sign in to your Wi-Fi network through a web page before you can use the Internet.
- 2. 2. Cannot find the device on the Bluetooth Device Nearby page of the app.
 - The sensor may be connected to another smartphone. Disconnect it from the other smartphone first.
- 3. The sensor Is offline.
 - Make sure the sensor is plugged in and powered on, then refresh "My Devices" in the Govee Home App by swiping down on the screen.
 - Make sure your router is connected to the internet, and your smartphone's network connection is working.
 - If the Wi-Fi password has been changed, the sensor will automatically go offline. Try connecting it to the network again.
 - Delete the offline sensor from the Govee Home App, then add and reconfigure the sensor again in the app.

Appendix

After-Sales Service

• Warranty: 12-Month Limited Warranty Support: Lifetime Technical Support

• Email: support@govee.com

Official Website: www.govee.com

Specifications

Model Name	H5125
Power Supply	CR2032 * 1
Power Input	3V
Working Temperature	-10"(to 50"C/ 14'F to 122'F
Bluetooth Communication Distance	55m / 180ft (No obstacles)

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Shenzhen Qianyan Technology LTD is under license.

Pointsde co11ecte sur-.quefairedemesdechets.fr Privi1alez ta l'eparation ou le don de votre appare1

Govee Home App

For FAQs and more information, please visit www.govee.com



Documents / Resources

<u>GoveeLife H5125 Smart Button Remote</u> [pdf] User Manual H5125, H5125 Smart Button Remote, Smart Button Remote, Button Remote, Remote

References

• User Manual

Manuals+,