



hama 00205322 Bluetooth Audio Transmitter and Receiver Instruction Manual

[Home](#) » [Hama](#) » hama 00205322 Bluetooth Audio Transmitter and Receiver Instruction Manual 

hama

00 205322

Bluetooth® audio transmitter /receiver
Bluetooth® -Audio-Sender /Empfänger



Contents

- [1 00205322 Bluetooth Audio Transmitter and Receiver](#)
- [2 Controls and displays](#)
- [3 Explanation of warning symbols and notes](#)
- [4 Package contents](#)
- [5 Safety instructions](#)
- [6 Switching on/off](#)
- [7 Receiver mode \(RX\)](#)
- [8 Transmitter mode \(TX\)](#)
- [9 Bypass mode \(BYPASS\)](#)
- [10 Warranty disclaimer](#)
- [11 Technical data](#)
- [12 Declaration of conformity](#)
- [13 Documents / Resources](#)
- [14 Related Posts](#)

00205322 Bluetooth Audio Transmitter and Receiver



Operating Instructions

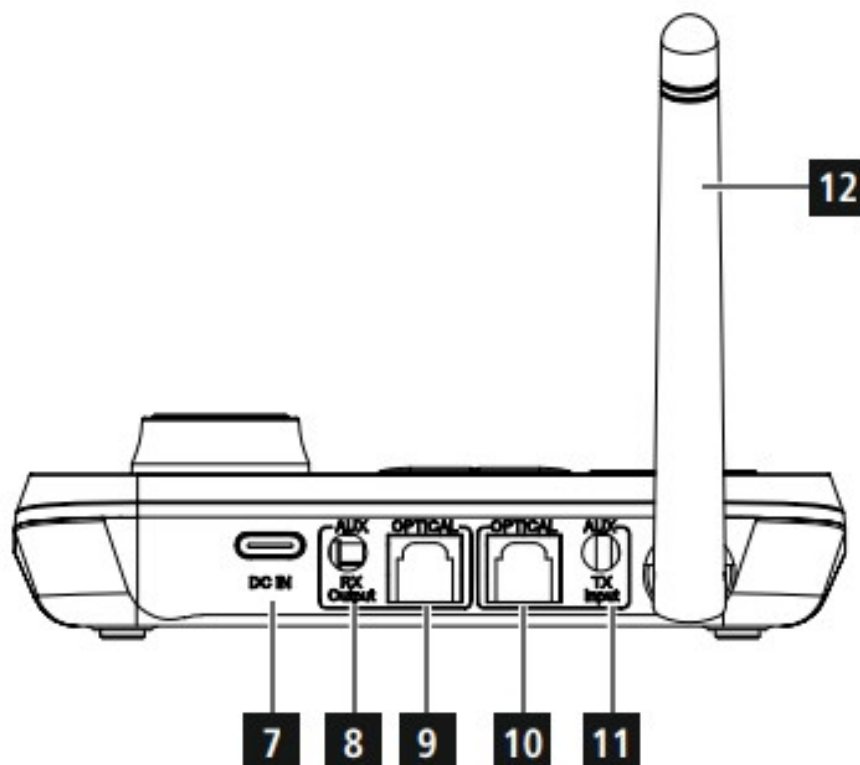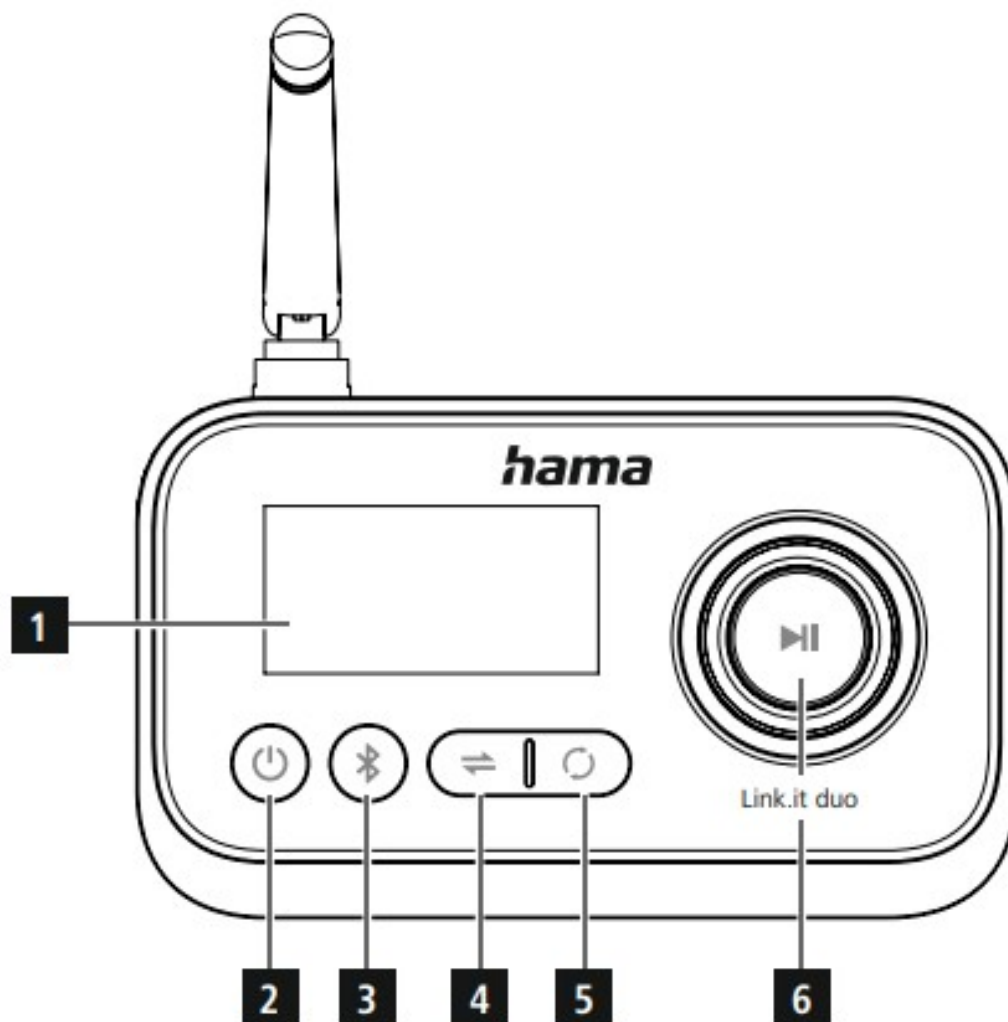

Thank you for choosing this Hama product!
 Take your time and read the following instructions and information completely.
 Please keep these instructions in a safe place for future reference.

Controls and displays

1. LC display
2. On/Off button
3. Bluetooth® button
4. Mode button (TX|RX|BYPASS)
5. Button for new Bluetooth® connection
6. Multi-function button
(Pause /Play /Volume /Navigation)
7. Power supply (USB-C)
8. 3.5mm jack Audio OUT
9. Toslink (optical) Audio OUT
10. Toslink (optical) Audio IN
11. 3.5mm jack Audio IN
12. Antenna

Explanation of warning symbols and notes



Risk of electric shock

This symbol indicates a risk of electric shock from touching uninsulated product parts that may carry hazardous voltage.



Warning

This symbol is used to indicate safety instructions or to draw your attention to specific hazards and risks.



Note

This symbol is used to indicate additional information or important notes.

Package contents

- 1x "Link.it duo" Bluetooth® audio transmitter /receiver
- 1x USB-C power cable
- 1x 3.5mm to RCA audio cable
- 1x 3.5mm audio cable
- 1x optical audio cable (Toslink)
- 1x operating instructions
- 2x disposal slip (Triman/WEEE)

Safety instructions

- The product is intended for private, noncommercial use only.
- The product is intended only for use inside buildings.
- Use the product only for the intended purpose.
- Protect the product from dirt, moisture and overheating and use it in dry rooms only.
- Children should be supervised to ensure that they do not play with the product.
- Do not use the product in areas in which electronic products are not permitted.

- Route all cables so there is no risk of tripping.
- Do not bend or crush the cable.
- Do not drop the product and do not expose it to any major shocks.
- Dispose of packaging material immediately in accordance with the locally applicable regulations.
- Do not modify the product in any way. Doing so voids the warranty.

Warning

- Do not attempt to service or repair the device yourself. Leave any and all service work to qualified experts.
- Do not open the product or continue to operate it if it becomes damaged.

Switching on/off

- Connect the power supply (7) to a suitable USB-A socket (e.g. TV/USB power supply unit etc.) using the USB-C power cable. When the power supply is established, the device starts automatically.
- Press the On/Off button (2) for approx. 3 seconds until the display comes on.
- To switch off, press the On/Off button (2) for approx. 3 seconds until the display goes off.

Receiver mode (RX)

Receiver mode lets you wirelessly stream music from your smartphone or other Bluetooth® audio source to your wired speakers or home cinema system.



6.1 Connection

Connect your speakers or home cinema system to one of the two audio OUT connectors using an appropriate cable.

6.2 Pairing


The device can be connected to up to 2 audio sources simultaneously. Once paired, these 2 connections are re-established as soon as Bluetooth® is activated.

- Press the mode button (4) until RX appears in the display to switch to reception mode.
- Search using your device for the product (only required on the first connection).
- Open the Bluetooth® settings on your device and wait until the list of found Bluetooth® devices shows "Hama Link.it duo devices".
- Select "HAMA Link.it duo devices" and follow the instructions of your device and complete the pairing process.

Note -Bluetooth® password

- Some devices require a password in order to connect to another Bluetooth® device.
- If your device requests a password to connect, enter 0000.

6.3 Multi-point technology

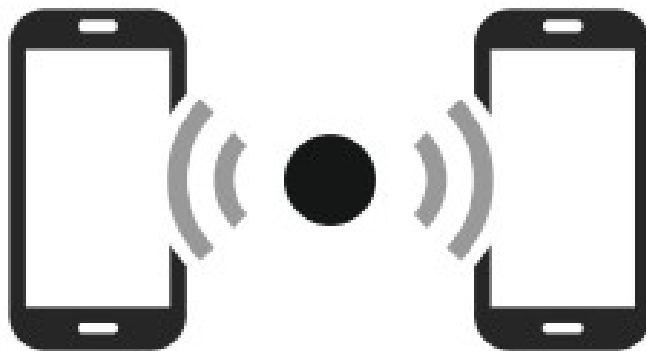

This product can connect to two Bluetooth® -enabled audio signal sources simultaneously (multi-point). These are shown accordingly in the display.

- First connect the first device to your product.
- Then connect the second device to your product (see 6.2).

6.4 Playback

- Start playback on your audio signal source.
- You can select the volume and tracks using the multi-function knob.

Transmitter mode (TX)

Transmitter mode allows you to wirelessly transmit music from an audio source (e.g. TV or home cinema system) to up to 2 Bluetooth® receivers (e.g. speakers or headphones).



7.1 Connection

Connect your audio source to one of the two audio IN connectors using an appropriate cable.

7.2 Pairing

The device can be connected to up to 2 Bluetooth® receivers simultaneously. Once paired, these 2 connections are re-established as soon as Bluetooth® is activated.

- Press the mode button (4) until TX is shown in the display to switch to transmitter mode.
- Activate pairing mode on your Bluetooth® receiver.
- Press the Bluetooth® button (3)
- After a few seconds, the name of your Bluetooth® receiver is shown on the device's display.
- Use the multi-function knob (6) to select your Bluetooth® receiver.
- A voice confirms the successful pairing.

7.3 Multi-point technology



This product can connect to two Bluetooth® receivers simultaneously. (Multi-point). These are shown accordingly in the display.

- First connect the first device to your product.
- Then connect the second device to your product.

7.4 Playback

- Start playback on your audio signal source.
- You can select the volume and tracks using the multi-function knob.

Bypass mode (BYPASS)

Bypass mode allows you to transmit music from an audio source (e.g. TV, home cinema system or smartphone) to audio devices (e.g. speakers or headphones) with cable and/or fibre.



8.1 Connection

- Connect your audio source to one of the two audio IN connectors using an appropriate cable.
- Connect your audio devices to one of the two audio OUT connectors using an appropriate cable.
- Press the mode button (4) until BYPASS appears in the display to switch to bypass mode.

8.2 Playback

- Start playback on your audio signal source.
- You can select the volume and tracks using the multi-function knob.

Warranty disclaimer

Hama GmbH & Co KG assumes no liability and provides no warranty for damage resulting from improper installation, mounting and improper use of the product or from failure to observe the operating instructions and/or the safety instructions.



Technical data

Nominal voltage	5V USB-C
Rated current consumption	180mA
Ambient temperature	0to 55°C
Bluetooth version	CSR V5.2
Profiles	A2DP
Codec	SBC/AAC/aptX LL
Bluetooth power class	Class 2
Bluetooth frequency	2402-2480 MHz
Maximum radio-frequency power transmitted	25mW

Declaration of conformity



Hama GmbH & Co KG hereby declares that the radio equipment type [00205322] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following

Internet address: <https://uk.hama.com> ➔ 🔍 ➔ 00205322 ➔ Downloads

The Bluetooth® word mark and logos are registered trade marks owned by Bluetooth SIG, Inc. and any use of such marks by Hama GmbH & Co KG is under license.

Other trademarks and trade names are those of their respective owners.

All listed brands are trademarks of the corresponding companies.

Errors and omissions excepted, and subject to technical changes.

Our general terms of delivery and payment are applied.

hama

Hama GmbH & Co KG
86652 Monheim / Germany
 Service & Support



www.hama.com




+49 9091 502-0



00205322/08.23

Documents / Resources

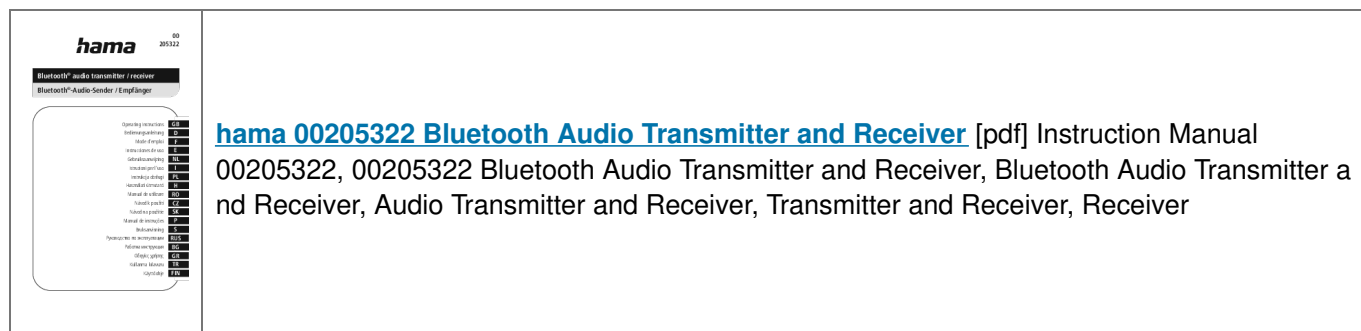

00
205322

Bluetooth® audio transmitter / receiver
Bluetooth®-Audio-Sender / Empfänger

Operativni interakciji	GB
Indefinirani podtipovi	D
Motivni aspekti	F
Interakcije sa svetom	E
Globalna interakcija	NL
Interakcija sa svetom	I
Interakcija sa svetom	PL
Interakcija sa svetom	M
Interakcija sa svetom	MO
Interakcija sa svetom	CZ
Interakcija sa svetom	SK
Interakcija sa svetom	P
Interakcija sa svetom	S
Interakcija sa svetom	RUSS
Interakcija sa svetom	BIG
Interakcija sa svetom	GB
Interakcija sa svetom	FR
Interakcija sa svetom	FRN

[hama 00205322 Bluetooth Audio Transmitter and Receiver](#) [pdf] Instruction Manual
00205322, 00205322 Bluetooth Audio Transmitter and Receiver, Bluetooth Audio Transmitter and
nd Receiver, Audio Transmitter and Receiver, Transmitter and Receiver, Receiver

00205322, 00205322 Bluetooth Audio Transmitter and Receiver, Bluetooth Audio Transmitter and Receiver, Audio Transmitter and Receiver, Transmitter and Receiver, Receiver