



HAVIT Lightning HV3275T-BLK-12V Virsma Step Light Instruction Manual

[Home](#) » [HAVIT LIGHTNING](#) » HAVIT Lightning HV3275T-BLK-12V Virsma Step Light Instruction Manual 



Virsma Step Light Installation Instructions


Contents

- [1 Product Specifications](#)
- [2 Dimensions](#)
- [3 Mounting Base Diagram](#)
- [4 Important Safety Issues:](#)
- [5 Steps for Installation:](#)
- [6 Must be installed by a licensed electrician](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)


Product Specifications

Model No.	1-1V3275T-ELK-12V	FIV3275T-VVHT-12V
Name	Visma	
Material	Aluminium	
Colour	Black	White
IP Rating	IP5	
Input Voltage	12v DC	
Lamp Base	Buik in LE	
Lamp Wattage	1x 6w	
Colour Temp	TR1 Colour – 3000k, 4000k, 5500k	
Lumens	2001m, 2101m, 2201m	
CR1	> 80	
Wiring	Parallel	
Dimmable	No	
Warranty	2 Years Replacement*	

Dimensions

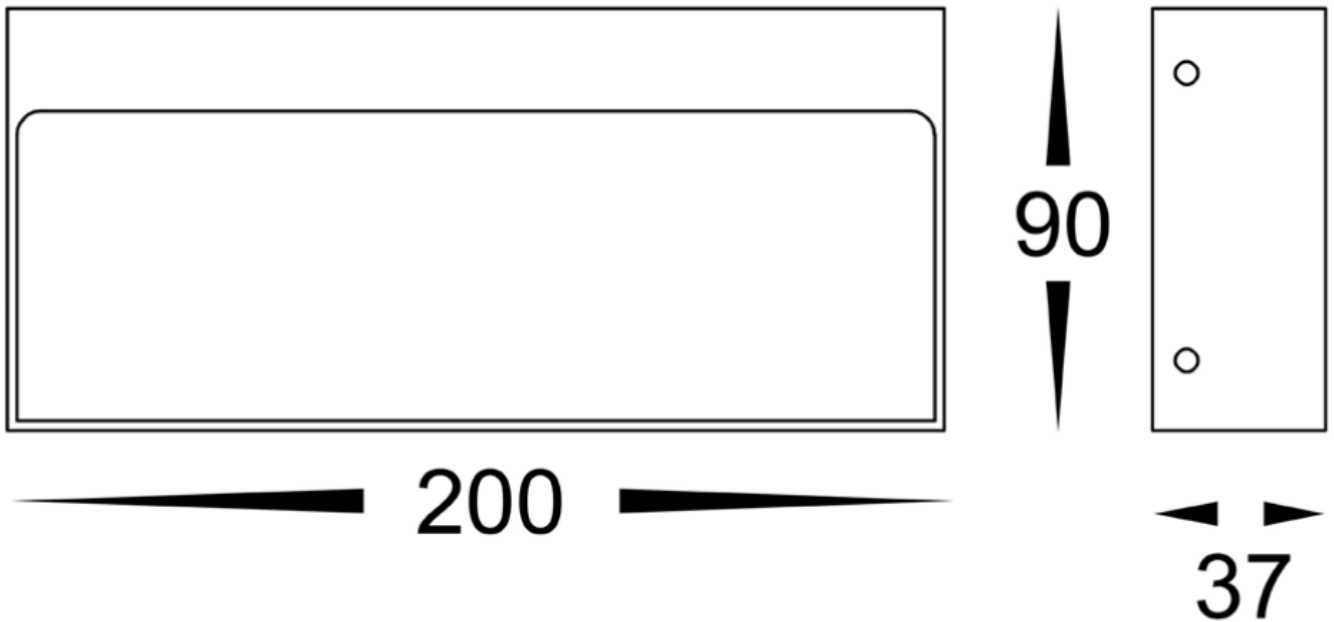

Mounting Base Diagram

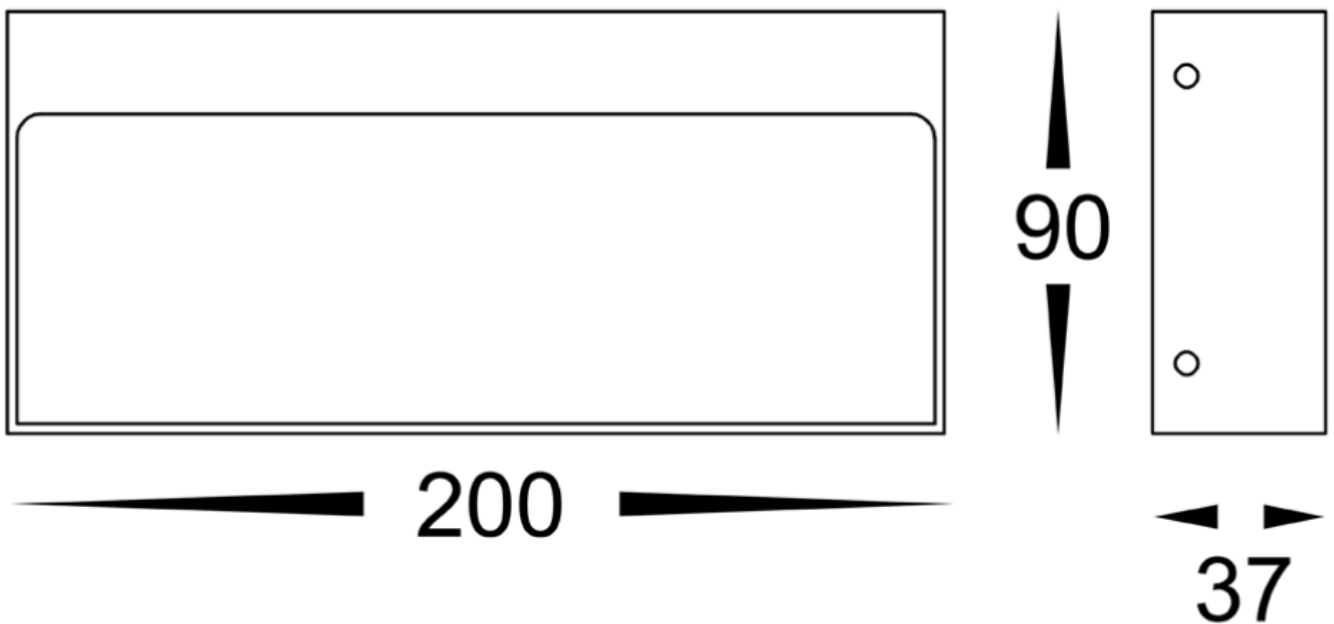

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Do not exceed maximum wattage restrictions for globes: 240V GU10 = 35w / 12V MR16 = 20w
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of the voltage required and cannot be installed more than 25m from LED Driver, if not within this allowance warranty will be voided.
- Aluminum and 304SS fittings must not be installed within 2km of any saltwater environments.
- When installing copper fittings, gloves must be worn to avoid any oils transferring to the fitting.

- All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on the fitting. (Warranty does not cover Tea Staining)
- All o-rings and seals must be in place correctly to maintain the warranty.
- These instructions may be updated at any time due to product improvements, Please visit the website for the most current installation instructions.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Loosen Allen screws on side of the fitting and remove the face and set it aside.
3. Install base plate to wall in the desired location
4. Using an appropriate 12v DC LED Driver – DO NOT CONNECT LIGHT FITTING DIRECTLY TO 240V
5. Connect the cable – If more than one fitting is installed, wiring must be done in parallel.
6. Fitting is preset to 3000k, to change the slide switch to desired color temperature
7. Reattach face to base plate making sure Allen screws are tight to avoid water penetration
8. Apply silicon around the edge of the fitting to prevent any water from getting inside to electrical connections.
9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road

Matraville NSW 2036

Australia

Tel: 02 9381 8300

Fax: 02 9666 8881

Email: sales@havit.com.au

Web: www.havit.com.au

Warranty Terms & Conditions*



<https://havit.com.au/pages/warranty-terms-and-conditions>

Additional Information



HV3275T-BLK-12V



HV3275T-WHT-12V

<https://havit.com.au/collections/all/products/hv3275t-wht-virsma-white-rectangle-led-step-lights>

<https://havit.com.au/collections/all/products/hv3275t-blk-virsma-black-rectangle-led-step-lights>

Product Specifications

Model No.	HV3275T-BLK-240V	HV3275T-WHT-240V
Name	Virisma	
Material	Aluminum	
Colour	Black	White
IP Rating	IP54	
Input Voltage	240v A	
Lamp Base	Built-in LED	
Lamp Wattage	1x 6w	
Colour Temp	TRI Colour – 3000k, 4000k, 5500k	
Lumens	2001m, 2101m, 2201	
CRI	> 80	
Wiring	Parallel	
Dimmable	No	
Warranty	2 Years Replacement*	

Dimensions

this allowance warranty will be voided.

- Aluminum and 304SS fittings must not be installed within 2km of any saltwater environments.
- When installing copper fittings, gloves must be worn to avoid any oils transferring to the fitting.
- All 316 & 304 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on the fitting. (Warranty does not cover Tea Staining)
- All o-rings and seals must be in place correctly to maintain the warranty
- This form may be updated at any time due to product improvements, please check the online installation form for the most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Loosen Allen screws on side of the fitting and remove the face and set it aside.
3. Install base plate to the wall in the desired location
4. Connect the cable – use wire with earth; connect the earth first, then live and neutral wire
5. Fitting is preset to 3000k, to change the slide switch to desired color temperature.
6. Reattach face to base plate making sure Allen screws are tight to avoid water penetration
7. Apply silicon around the edge of the fitting to prevent any water from getting inside to electrical connections.
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road

Matraville NSW 2036

Australia

Tel: 02 9381 8300

Fax: 02 9666 8881

Email: sales@havit.com.au


Web: www.havit.com.au

Warranty Terms & Conditions*



<https://havit.com.au/pages/warranty-terms-and-conditions>

Additional Information

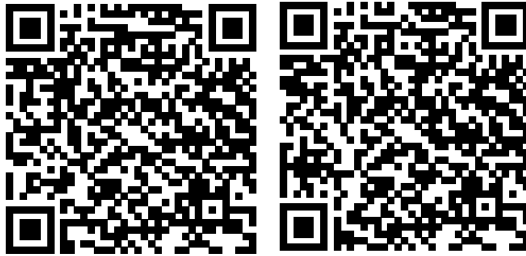


HV3275T-BLK-240V HV3275T-WHT-240V

<https://havit.com.au/collections/all/products/hv3275t-wht-virsma-white-rectangle-led-step-lights>

<https://havit.com.au/collections/all/products/hv3275t-blk-virsma-black-rectangle-led-step-lights>



Documents / Resources



[HAVIT Lightning HV3275T-BLK-12V Virsma Step Light](#) [pdf] Instruction Manual
HV3275T-BLK-12V, HV3275T-WHT-12V, HV3275T-BLK-12V Virsma Step Light, HV3275T-BLK-12V, Virsma Step Light, Step Light, Light

References

- [Havit Lighting](#)

[Manuals+](#).