




# HF Electronics A102 Bluetooth Headset User Manual

[Home](#) » [HF Electronics](#) » HF Electronics A102 Bluetooth Headset User Manual


## Contents [ [hide](#) ]

- 1 HF Electronics A102 Bluetooth Headset User Manual
- 2 1.Product Overview
- 3 Package Contents:
- 4 2.Basic Operation
- 5 3.Bluetooth Pairing and Connection
- 6 4.Connection with Two devices
- 7 Notes :
- 8 5.LED Indicator
- 9 6.Charging
- 10 Charge Connections
- 11 Notes :
- 12 7.Product Specification
- 13 Notes :
- 14 8.Attentions and Q & A
- 15 Read More About This Manual & Download PDF:
- 16 Documents / Resources
- 17 Related Posts

# HF Electronics A102 Bluetooth Headset User Manual

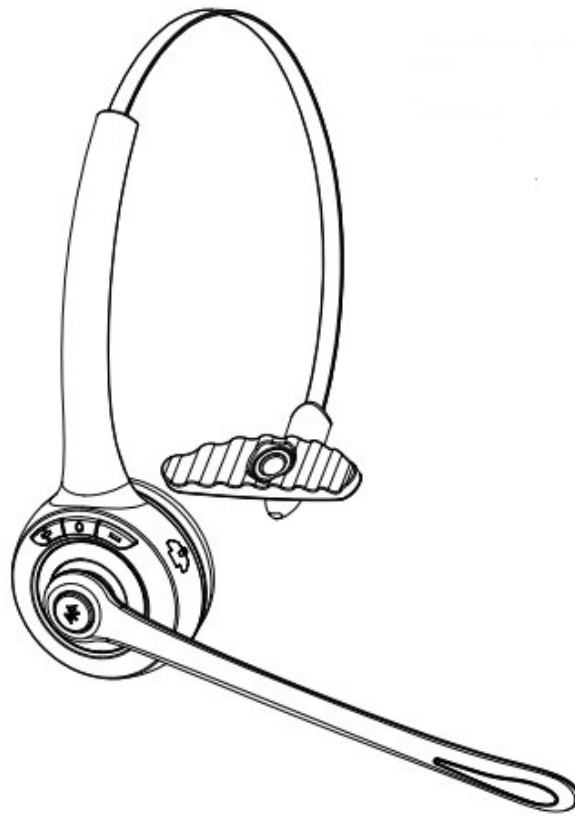


## 1.Product Overview

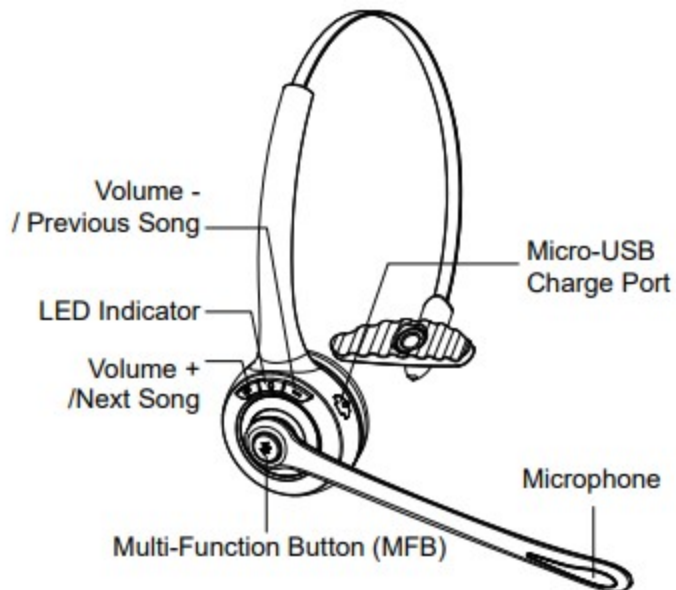

## Package Contents:

- A. Bluetooth Headset A102 X 1
- B. Micro USB charging cable x 1
- C. User manual x 1



## 2.Basic Operation



Button	Function	Operation
	Power On	In off status,Long press MFB for 3 seconds to power on.
	Power Off	In on status,Long press MFB for 5 seconds to power off.
	Enter Pairing Mode	In off status,long press MFB for 5 seconds to enter pairing mode.
	Play/Pause	Short press when play music.
	Redial A Call	In connected status,double press MFB to dial the last call.

Button	Voice Dialing	In connected status, long press MFB for 3 second then release.
	Audio Switch	When during a call, long press for 1 second MFB then release.
	Answer A Call	When a call incoming,short press to answer
	Hang Up A Call	When during a call, short press to hang up
	Reject A Call	When a call incoming, long press for 1 second to reject a call.
	Microphone Mute	When during a call, double press to mute, double press again to cancel
Volume +	Volume Up	Short press.

	Next Song	Long press for 1 second.
Volume –	Volume Down	Short press.
	Previous Song	Long press for 1 second.


### 3. Bluetooth Pairing and Connection

- A. In off status, long press MFB for 5 seconds to enter pairing mode with Blue & Red LED flash alternately.
- B. Search and click to connect "A102" on your phone Bluetooth lists, LED change to Blue slow flash once every 10 seconds after connected, now you can play music from phone to headphone.
- C. You can press MFB / volume+ / volume- on the Bluetooth headset to control the answer/hang up a call and play/pause) of the music, next and previous song, volume up and down.

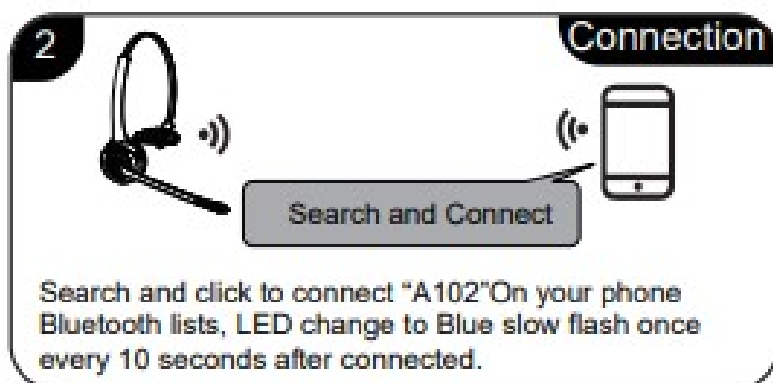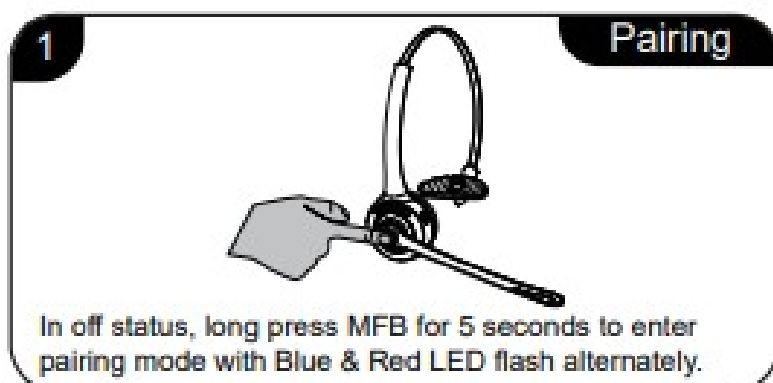

### 4. Connection with Two devices

- IA. Follow part 3 to connect with first phone, then turn off the Bluetooth function of first phone.
- B. Turn off the headset then long press MFB for 5 seconds to enter pairing mode again with Red & Blue LED flash alternately. Turn on the Bluetooth function of second phone to search and connect "A102", LED change to Blue flash once every 10 seconds.
- C. Turn on Bluetooth function of second phone, click to reconnect "A102" on Bluetooth lists. LED change to Blue slow flash after connected.
- D. Turn on Bluetooth function of first phone, click to reconnect "A102" on Bluetooth lists. Headset is connected with two phones now.

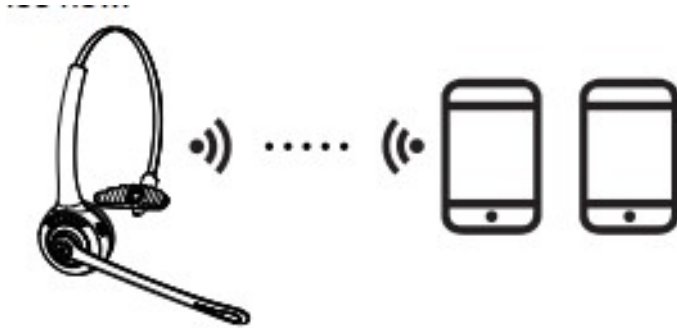

### Notes :

Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or turn off the music of the previous phone. The same operation during talking status.

### 5.LED Indicator

Mode	LED Indicator
Power on	Blue LED flash 3 times
Power off	Red LED is on for 1 second
Pairing mode	Red & Blue LED flash alternately
Reconnect mode	Blue LED flash twice every 5 seconds

Connected standby mode	LED Blue flash once every 10 seconds
Playing Music	LED Blue flash twice every 10 seconds
Talking	LED Blue flash twice every 10 seconds
Charging	Solid Red LED
Full charged	Solid Blue LED
Low battery	Red LED flash

## 6.Charging


Please charge the A102 at once when the Red LED flash.

Charging time is about 2 hours. Red LED turn off and blue LED turn on when full charged.

### Charge Connections

Please connect to the A102 charging port through the Micro

USB end of Micro USB charging cable, the USB end to the charger as car charger, travel charger, computer USB, etc.

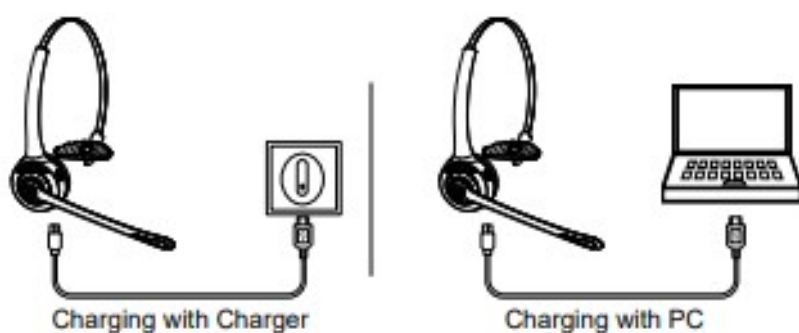

**Notes :**

1. Please charge the A102 at least one time every 2 months when don't use it.
2. Plug charging cable for charging when power on, will reset the headset and power off.

**7.Product Specification**

Bluetooth Version	V5.1
Bluetooth Chipset	QCC3020
Operation Range	10 meters
Battery Capacity	180mAh/3.7V
Charging Time	About 2 hours
Standby Time	About 160 hours
Music Time	About 13 hours
Talking Time	About 11 hours
Working Temperature	-10- 55°C

**Notes :**

\* Actual use time will differ from environment and music



## 8.Attentions and Q & A

A. How to reconnect and operation when failed to reconnect?

When A102 connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on, If failed, please pair and connect again.


B. How to delete paired records? In power on status, long press the Volume – and Volume + for 5 seconds to clear the pairing record. Blue and Red LED flash once at the same time that means the pairing record has been cleared, and the A102 will not connect the connected device. When there are various connection problem, try clearing the pairing record firstly.

C. What devices could charge for the headphone? Any car charger, power bank, PC etc which meet DC 5V , charging current more than 500mA could be charge for this item.

D. How to do if can not power on or dead? Please try charging reset: Plug the charging cable when power on, it will reset the headset and power off.

***Read More About This Manual & Download PDF:***

### Documents / Resources

 <p>Bluetooth Headset User Manual A102</p>	<p><a href="#">HF Electronics A102 Bluetooth Headset</a> [pdf] User Manual A102, 2A59C-A102, 2A59CA102, A102 Bluetooth Headset, Bluetooth Headset</p>
--	---