




HIKVISION CB140PT Conduit Base User Manual

[Home](#) » [Hikvision](#) » HIKVISION CB140PT Conduit Base User Manual 

HIKVISION CB140PT Conduit Base

HIKVISION

CB140PT
Conduit Base

The bracket should be installed on a flat wall. The wall must be capable of supporting a minimum of three times the total weight of the camera and mount. The maximum load capacity of the bracket is 9.92 lbs (4.5 kg).

Available Model: CB140PT

NOTE: See special installation instructions for select cameras on the next page.

- Aluminum Alloy Material with Surface Spray Treatment
- Waterproof Design
- Bracket Cable Hole for Simple Cable Fitting

Contents

- [1 Specifications](#)
- [2 Dimensions](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

Specifications

CB140PT


Appearance – Hikvision white

Material – Aluminum alloy

Dimensions – Ø5.39" x 2.03" (Ø137 mm x 51.5 mm)

Weight – 1.16 lbs (527 g)

Dimensions

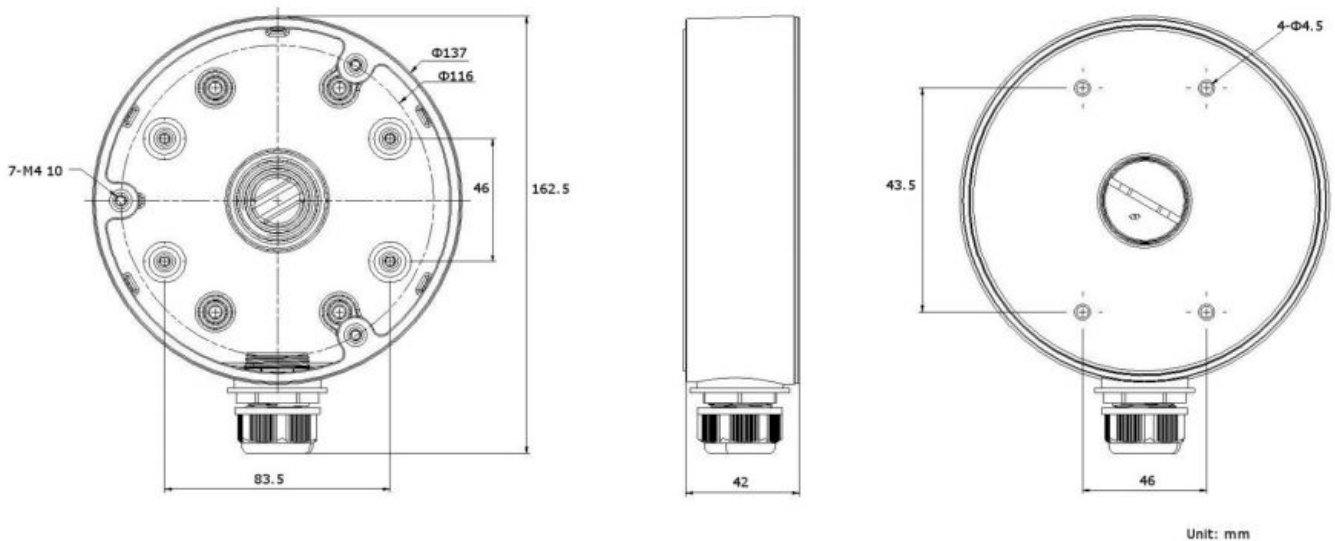

Special Installation Instructions for Select Cameras

Some cameras require the following steps to install a CB140PT.

1. Twist to remove trim ring from camera mounting base.
2. Loosen the pressure clamp locking screw on the mounting base.
3. Slide pressure clamps away from mounting base.
4. Detach mounting base from the camera.
5. Position mounting base on the CB140PT.
6. Align four screw holes on the mounting base to the four inner screw hole posts on the CB140PT.
7. Attach the mounting base to the CB140PT with four screws.
8. Restore the assembly:
 1. Re-position the pressure clamp.
 2. Re-tighten the pressure clamp lock screw.
 3. Place camera body on mounting base.
 4. Re-attach and secure the trim ring.

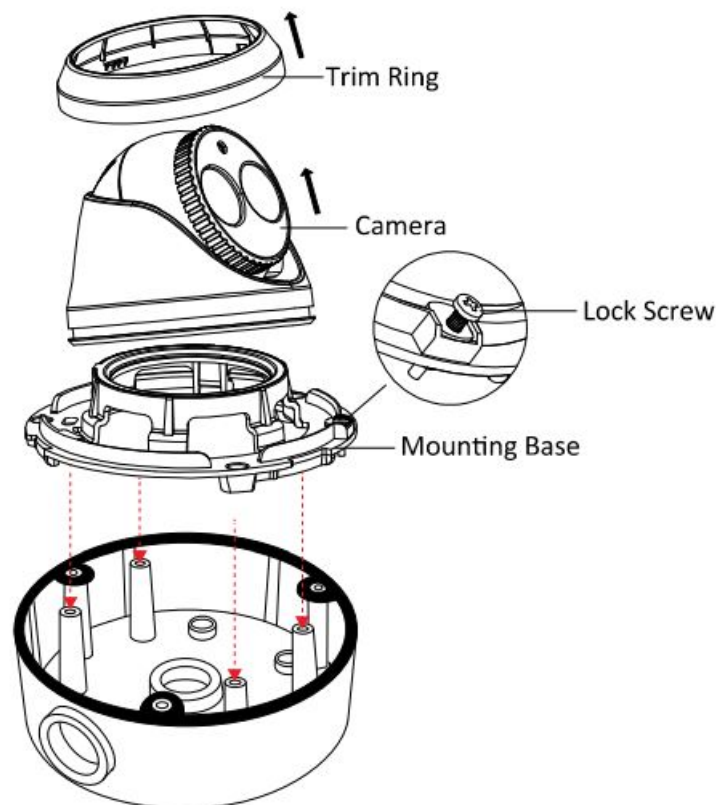



Figure 1, Attaching CB140PT to a Select Camera Model [Typical]



Note: Do not use the three outer screw holes on the CB140PT rim; you must use the four inner screw hole posts.

Hikvision USA Inc., 18639 Railroad Street, City of Industry, CA 91748, USA · Hikvision Canada, 4848 rue Levy, St-Laurent, Quebec, Canada, H4R 2P1 Tel: +1-909-895-0400
· Toll-Free in the USA: +1-866-200-6690 · E-Mail: sales.usa@hikvision.com · www.hikvision.com © 2018-2020
Hikvision USA Inc. · All Rights Reserved · Specifications subject to change without notice.

Documents / Resources

	<p>HIKVISION CB140PT Conduit Base [pdf] User Manual CB140PT Conduit Base</p>
---	--

Manuals+