

HIS KB-M2-W35 Fixed Wall Mount Keyboard Instruction Manual

Home » HIS » HIS KB-M2-W35 Fixed Wall Mount Keyboard Instruction Manual



Contents

1 Installation Instructions

1.1 Cut or Drill

1.2 Install the Coller

1.2.1 Documents / Resources

4.0.4.4.0.6

1.2.1.1 References

Installation Instructions

KB-M2-W35- _ _ , KB-R2-W35- _ _ , and KB-R3-W35- _ _ Series Fixed Wall Mount Keyboard

Cut or Drill

1. Cut or drill mounting pattern in panel. Refer to Figure 1 for the cutout dimensions.

NOTE: +/- 0.8 mm (0.03") tolerance on all dimensions unless otherwise noted. The provided hardware is for use with panels that have a maximum thickness of 14 mm (9/16") if using clearance holes. Thicker panels can be used but require longer screws than those provided.

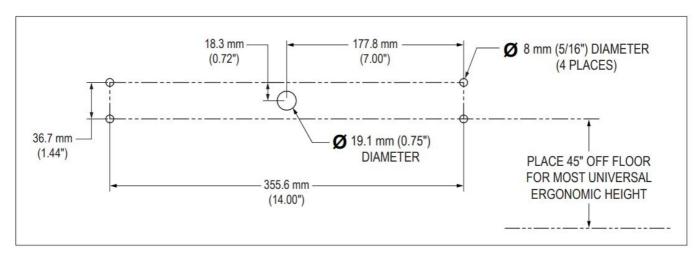


FIGURE 1 - WALL MOUNT CUTOUT PATTERN

Install the Coller

2. Install the collar from the rear using the four provided M6 screws and washers as shown. Tighten all screws until the gasket is compressed to 1/16" to 3/32" thick.


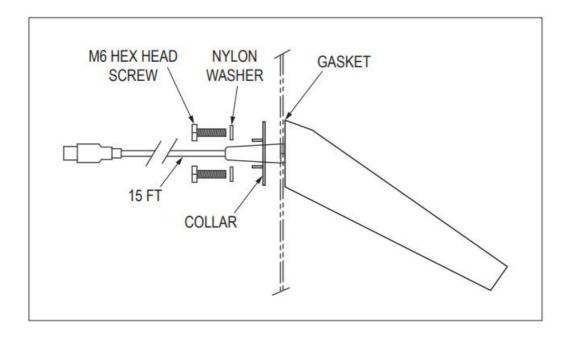


FIGURE 2 – SIDE VIEW OF KEYBOARD

99170A

- December 20, 2022
- www.HopeIndustrial.com
- International: +1 (678) 762-9790
- UK: +44 (0) 20 7193 2618
- © 2023 Hope Industrial Systems, Inc.

Documents / Resources



HIS KB-M2-W35 Fixed Wall Mount Keyboard [pdf] Instruction Manual KB-M2-W35, KB-R2-W35, KB-R3-W35, KB-M2-W35 Fixed Wall Mount Keyboard, KB-M2-W35, Fixed Wall Mount Keyboard, Wall Mount Keyboard, Mount Keyboard, Keyboard

References

Industrial Monitors & Touch Screens - Hope Industrial Systems

Manuals+.