

Houtonsen S6 Helmet Bluetooth Intercom Headset



Houtonsen S6 Helmet Bluetooth Intercom Headset Instructions

[Home](#) » [Houtonsen](#) » Houtonsen S6 Helmet Bluetooth Intercom Headset Instructions 

Contents

- [1 Houtonsen S6 Helmet Bluetooth Intercom Headset](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FAQs](#)
- [5 Product Description](#)
- [6 Precaution](#)
- [7 Button Instructions](#)
- [8 Remote Control](#)
- [9 Bluetooth functions](#)
- [10 FCC](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

Houtonsen

Houtonsen S6 Helmet Bluetooth Intercom Headset



Product Information

- **Specifications**

- **Product Name:** Intercom headset S6
- **Bluetooth Name:** S6
- **Bluetooth Version:** V5.1
- **Bluetooth Protocol:** [Bluetooth Protocol]
- **Can it be connected to intercom headsets of other brands?:** Yes

Product Usage Instructions

- **Button Instructions**

- Multi-function button
- Intercom button
- Volume +
- Volume —

- **Power On and Off**

- **Power On:** Simultaneously long-press the Intercom button and the Multi-function button for 1 second. The blue indicator lights up steadily for 1s.
- **Power Off:** Simultaneously press and hold the Intercom button and the Multi-function button. The red indicator light will stay on for 1s.

- **Tips for Language Switching**

- To switch the language, press and hold the Multi-function button and the Volume+ button simultaneously

for 2s after shutting down.

FAQs

- **Q: Can the intercom headset S6 be used in heavy rain?**
 - **A:** Yes, the exceptional waterproof design allows for use in various outdoor settings, including heavy rain.
- **Q: How many devices can be paired with the intercom headset simultaneously?**
 - **A:** The intercom headset S6 supports pairing with multiple devices simultaneously, facilitating seamless connectivity.

Product Description

- The helmet Bluetooth intercom headset is primarily designed for outdoor activities, professional engagements, or specialized work environments, offering real-time wireless communication capabilities for two or more individuals, thereby facilitating seamless interaction and connectivity amongst users.
- Equipped with functionalities such as audio playback, voice-guided navigation, and hands-free calling, it offers convenience for users across various contexts.
- The exceptional waterproof design and effective noise cancellation allow for various outdoor work or sports settings.

Precaution

Notes:


1. Optimal headphone performance can be achieved in open spaces while avoiding the proximity of devices such as transformers, high-voltage power lines, and signal base stations;
2. The incoming call will ring for 8 seconds before being automatically answered. The option to enable or disable automatic call answering is available;
3. The signal distance indicated for the product represents the maximum range, but in actual usage, it may be subject to environmental factors that can affect the signal range;
4. When the microphone and speaker units are nearby, resonance may occur. Simply increase the distance between them to prevent this;
5. Resetting does not clear the pairing records of the remote control. After repairing the remote control, it will overwrite the previous records.

Button Instructions

Button instructions: (a diagram attached)

1. Multi-function button
2. Intercom button
3. Volume “+”
4. Volume “-”

Power On and Off

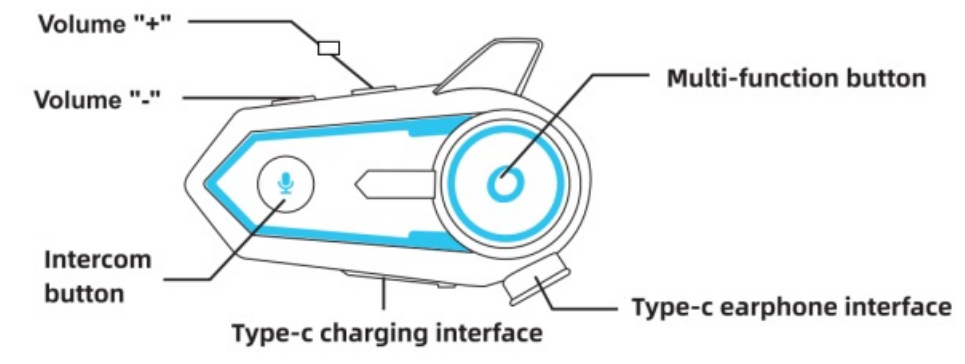

1. **Power On/Off:** Simultaneously long-press the “Intercom” button and the “Multi-function” button, accompanied by the audible prompt “Power On” and the announcement of the current remaining battery level. The blue indicator lights up steadily for 1s.
2. **Power Off:** Simultaneously press and hold the Intercom button and the Multi-function button. A “power off” prompt will be heard, and the red indicator light will stay on for 1s.

Tips for language switching:

- To switch the language, press and hold the “Multi-function” button and the “Volume+” button simultaneously for 2s after shutting down.

Remote Control

Instructions for pairing the remote control

1. Pairing the earphones: After turning on the earphones, press and hold the Multi-function button for 3s to enter the pairing mode. The red and blue lights will flash alternately. Continue holding the button without releasing it until the red light flashes, indicating that the earphones have entered the remote control pairing mode. Bring the earphones close to the remote control and wait for the pairing to be successful. Once paired, there will be no need to pair again.
2. Pairing the remote control: To pair the remote control for the first time, press and hold the language button for 6s to enter the pairing mode. Once the green light flashes and then stays lit for 1s, it will enter pairing mode. After a successful pairing, there is no need to repair in the future.

Bluetooth functions

1. **Bluetooth signal activation:** Upon powering on, press and hold the Multi-function button for 3s. You will hear a prompt saying “Pairing” and the indicator light will flash alternately in red and blue. At this point, the Bluetooth signal becomes active, allowing for connection.
2. **How to pair Bluetooth in the two-speaker mode:** Press the Intercom button to end the communication. The indicator light will flash slowly in blue; Press and hold the Multi-function button, and the red and blue indicators flash alternately. This shows that Bluetooth pairing is now possible.
3. **How to pair Bluetooth in the multi-speaker mode:** Press the Intercom button in the intercom mode twice, hang up the intercom call, and the indicator will slowly flash blue; Press and hold the Multi-function button, and the red and blue indicators flash alternately. This shows that Bluetooth pairing is now possible.

4. **How to switch between the Bluetooth and intercom modes in the two-speaker mode:** Simply press the Intercom button to end the intercom session, and the headset will automatically enter the Bluetooth mode; Press the intercom button again to switch to intercom mode.
5. **How to switch between Bluetooth and intercom modes in the multi-speaker mode:** Press the Intercom button twice to end the communication, and the headset will automatically enter the Bluetooth mode; Press the intercom button again to switch to intercom mode.
6. The earphones with pairing records, after powering on, click the intercom button, wait for 2~3 seconds, and the signal can be automatically connected.
7. **Clear Bluetooth and intercom pairing records:** After powering off, press the volume “+”, volume “-” and multi-function button at the same time for 3 seconds, the indicator light flashes red, blue and green quickly, and the prompt tone “Restore factory settings”.

Intercom Function

1. Pairing in the two-speaker mode:

1. After powering on, press and hold the Intercom button for 2s. The indicator light will flash alternately in red and blue, accompanied by a prompt tone saying “pairing”;
2. Press the Intercom button on either of the two devices, and you will hear a prompt tone saying “Two-speaker mode” while the indicator light flashes in red and blue. Wait for the green indicator to illuminate and the blue indicator to flash slowly, indicating a successful pairing. You will hear a prompt tone saying “Intercom connected,” and the intercom will now be in two-speaker mode.
3. Switch from the intercom mode to the Bluetooth mode: Press the Intercom button.

2. Pairing in the multi-speaker mode:

1. Upon powering on, press and hold the Intercom button on all headsets for 2s. The indicator light will alternate between red and blue flashes, accompanied by an audible prompt of “pairing”;
2. Press the Intercom button on one of the devices twice, accompanied by a prompt: “Networking mode,” indicated by a rapid flashing of red and blue lights. Wait for the green indicator to turn on, followed by a slow flashing of the blue indicator light, showing a successful pairing. A prompt tone “Intercom connected” indicates the transition into the multi-speaker mode.
3. Switch from the intercom mode to the Bluetooth mode: Press the Intercom button.

3. Intercom operations with headsets without a built-in microphone:

1. Upon powering on, press and hold the Intercom button for 2s. The indicator light will flash alternately in red and blue, accompanied by a prompt tone “Pairing.”
2. Press the Bluetooth intercom headset, and the indicator will flash in blue. After a successful pairing, the green indicator will light up.
4. While in intercom mode, if the communication distance exceeds the operational range, the device will automatically enter standby mode, awaiting reentry into the intercom signal coverage. Subsequently, it will establish an automatic connection.
5. The earphones with pairing records, after powering on, click the intercom button, wait for 2~3 seconds, and the signal can be automatically connected.
6. Clear the Bluetooth and intercom pairing record: Turn off the device and simultaneously press the “volume +” and “volume -” buttons for 5s to erase the pairing records.
7. Switch from Bluetooth mode to intercom mode: Press the intercom button.

Telephone functions:

1. **Answer/hang up:** When receiving a phone call, simply press the Multi-function button to answer or end the call;
2. **Automatic call answering:** Upon receiving an incoming call, the headphones will automatically answer after 8s of ringing. This feature can be enabled or disabled;
3. **Voice assistant:** Press the multi-function button three times to enable this function;
4. **Turn on the automatic answer function:** In the powered-on state, press and hold the “Multi-function button” and “Volume+” simultaneously for 3s. A blue light will appear for 1s, accompanied by a voice prompt indicating that the automatic answer feature has been activated.
5. **Turn off the automatic answer function:** In the power-on state, press and hold the “Multi-function button” and “Volume+” simultaneously for 3s. A red light will appear for 1s, accompanied by a voice prompt indicating that the automatic answer feature has been disabled.

Music playback and music sharing:

1. Music playback:

- **Adjusting volume:** Press the “+” button to increase the volume. Press the “-” button to decrease the volume.
- **Change the song:** Press and hold the volume “+” for 2s to skip to the next track, and press and hold the volume “-” for 2s to go back to the previous track.
- **Pause playback:** Press the Multi-function button.

2. Music sharing:

1. When the intercom headset is connected to the intercom and music player at the same time, press and hold “Volume +” and “Volume-” at the same time, and you will hear the prompt tone “music sharing”.

LED Light On and Off:

- After powering on, press the volume “+” and multi-kinetic energy button for 1 second at the same time, and switch the LED light blue, green and red in order every time you press it.

Resetting:

- After powering off, press the volume “+”, volume “-” and multi-function button at the same time for 3 seconds, the indicator light flashes red, blue and green quickly, and the prompt tone “Restore factory settings”.

Product Information

Product name	Intercom headset
Bluetooth name	S6
Bluetooth version	V5.1
Weight	48g (±5g)
Dimensions	

Bluetooth protocol	
Type of battery	Polymer lithium battery
Battery capacity	850mAH
Charging duration	2 2hrs
Call duration	25 25hrs
Standby duration	600 600hrs
Waterproof rating	IP67
Can it be connected to intercom headsets of other brands?	Yes

FCC

FCC Caution

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, according to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used following the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF warning for Portable device: The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

IC Caution: RSS-Gen Issue 3 December 2010" & "CNR-Gen 3e This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

1. This device may not cause interference, and
 2. This device must accept any interference, including interference that may cause undesired operation of the device.
-

Documents / Resources



[Houtonsen S6 Helmet Bluetooth Intercom Headset](#) [pdf] Instructions

S6 Helmet Bluetooth Intercom Headset, S6, Helmet Bluetooth Intercom Headset, Bluetooth Intercom Headset, Intercom Headset, Headset

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.