



Home » hoymiles » hoymiles DTS Series Data Transfer Stick User Manual 📆

## Contents [ hide ]

- 1 hoymiles DTS Series Data Transfer Stick
- 2 Warranty
- 3 About This Manual
- 4 Safety Instructions
- 5 Safety Instructions
- 6 Product Introduction
- 7 Technical Specifications
- 8 Installation
- 9 Indicators and Button
- 10 Network Configuration
- 11 FCC Statement
- 12 Frequently Asked Questions
- 13 Documents / Resources
  - 13.1 References



hoymiles DTS Series Data Transfer Stick



## **Legal Notice**

Hoymiles has made every effort to ensure the accuracy and completeness of this manual. However, this manual may be changed and revised due to product enhancements or user feedback. Hoymiles reserves the right to modify this manual without prior notice at any given time. The latest version of this manual can be found by visiting the Hoymiles official website (<a href="https://www.hoymiles.com">www.hoymiles.com</a>) or scanning the QR Code below.



## Warranty

Follow the installation instructions in this manual to ensure warranty compliance and reliability. The current warranty conditions can be accessed at <a href="https://www.hoymiles.com">www.hoymiles.com</a>.

### **Contact Us**

If you have technical queries or any questions concerning our products, please contact our support through the Hoymiles service portal:

## Germany

• service.de@hoymiles.com

## Italy

service.it@hoymiles.com

### **Poland**

• service.pl@hoymiles.com

### Rest of the EU

• service.eu@hoymiles.com

### **Brazil**

• service.br@hoymiles.com

### **USA**

- service.us@hoymiles.com
- Australia & New Zealand <a href="mailto:service.au@hoymiles.com">service.au@hoymiles.com</a>

## **Spain**

• service.es@hoymiles.com

### **Netherlands**

• service.nl@hoymiles.com

### **Finland**

• service.fi@hoymiles.com

## Spanish-speaking countries

• service.mx@hoymiles.com

### Canada

• service.ca@hoymiles.com

## **Asia & Pacific**

• service.asia@hoymiles.com

## France

• service.fr@hoymiles.com

## **Norway**

• service.no@hoymiles.com

## **Austria**

• service.at@hoymiles.com

## Germany

• + 49 6994322186

### **Brazil**

• + 55 1148585231 <u>hoymiles.com</u>

### **France**

+33 159131589

## **North America**

+1 8449964537

### **Netherlands**

+31 852736388

### **Poland**

## **Revision History**

### V202502

This issue marks the initial official release.

### **About This Manual**

### **Purpose**

This manual contains important instructions regarding the installation and operation of the Hoymiles Data Transfer Stick (DTS). Please carefully read this manual before the installation, operation, and maintenance.


#### **Audience**

This document is only for qualified personnel. Only qualified personnel who have been trained or have mastered relevant skills can install and maintain the product under the guidance of this document.

## **Validity**

The DTS is only compatible with Hoymiles hybrid energy storage inverters and AC-coupled energy storage inverters. This document is valid for the following DTS models:

- DTS-WiFi-G3
- DTS-4G-G3
- DTS-WL-G3



Item	Meaning	Description
A	Product name	DTS: Data Transfer Stick

В	Communication method	WiFi: Connects to the S-Miles Cloud via Wi-Fi 4G: Connects to the S-Miles Cloud via 4G WL: Connects to the S-Miles Clou d via WLAN
С	Generation	G3: The third generation

## **Safety Instructions**

## **Safety Symbols**

Safety symbols are used in this manual as follows:

Symbol	Description
<b>▲</b> DANGER	This symbol indicates potential risks that, if not avoided, may lead to death or serious physical injury.
<b>⚠</b> WARNING	This symbol indicates potential risks that, if not avoided, may lead to personal injury or device damage.
<b>▲</b> CAUTION	This symbol indicates potential risks that, if not avoided, may lead to device malfunctions or financial losses.
NOTICE	This symbol indicates potential risks that, if not avoided, may lead to minor injury or damage to the equipment.
NOTE	This symbol indicates an important step or tip that leads to the best results but is not safety or damage-related.

## **Additional Symbols**

The product label contains the following symbols with their meanings described below:

Icon	Explanation
C€	CE mark  The product complies with the requirements of the applicable EU directives.
F©	FCC mark The product complies with the FCC standard.
(i)	Observe the documentation  Read and understand all documentation supplied with the product.
	Treatment  Electrical equipment that has reached the end of life must be collected separately and returned to an approved recycling facility to comply with the European Directive 2002/96/EC on Waste Electrical and Electronic Equipment and its implementation as national law. Return any devices you no longer need to an authorized dealer or an approved collection and recycling facility.

## **Safety Instructions**

The DTS has been designed and tested in compliance with international safety standards, and thus requires careful installation and operation. Installers must carefully read and strictly follow the safety instructions in this section.

## Failure to do so may result in:

- Injury or death to the installers or operators
- Damage to the DTS

### **DANGER!**

Do not attempt to repair the device yourself. If you encounter any device issues, or need repair or warranty information, please contact us.

#### **WARNING!**

- Do not use Hoymiles products in a way that is not suggested by the manufacturer.

  Doing so may cause death or injury to persons or damage to the equipment.
- Read all instructions and warnings in the technical description and on the DTS before

installing or using the device.

- Do not use the device in locations where wireless devices are not allowed.
- Keep the device away from water, fire, moisture, and hot environments to prevent damage.

#### **CAUTION!**

- Do not try to repair the DTS without approval from Hoymiles. If the DTS is damaged, send the DTS back to your installer for repair or replacement. Disassembling the DTS without approval from Hoymiles will invalidate the remaining warranty period.
- Hoymiles confirms that the product described in this guide meets the essential requirements and relevant provisions of the EU directives.

Radio Technology	2.4 G Wi-Fi
	Wi-Fi: 2412 to 2484 MHz
Radio Spectrum	Bluetooth LE: 2402 to 2480 MHz
Maximum Transmission Power	Wi-Fi: 15 dBm Bluetooth LE: 13.5 dBm

Radio Technology 2.4 G Wi-Fi

## Radio Spectrum

Wi-Fi: 2412 to 2484 MHz

Bluetooth LE: 2402 to 2480 MHz

#### Maximum Transmission Power

Wi-Fi: 15 dBm Bluetooth LE: 13.5 dBm

These technical parameters apply only to EU countries.

### **NOTICE**

- Electrical installations: Perform all electrical installations in accordance with national and local regulations.
- To ensure optimal reliability and meet warranty conditions, install the DTS according to

the instructions in this guide.

 This product is not a network device but can connect to a home router via Wi-Fi, leveraging the router's security functions to counter potential cybersecurity risks like DoS attacks.

## **EU Directive Compliance**

This product complies with the following EU directives and can be used without restrictions in the

## **European Union**

- Directive 2014/53/EU (RED) and 2009/125/EC: Relating to the provision of electrical equipment within certain voltage limits on the market (Low Voltage Directive).
- Directive 2011/65/EU and 2015/863/EU (RoHS): Restricting the use of certain hazardous substances in electrical and electronic equipment. More detailed information can be found at <a href="https://www.hoymiles.com/">https://www.hoymiles.com/</a>.

### **Product Introduction**

#### Overview


DTS-G3 is the third-generation data transfer stick of Hoymiles, which is small and easy to install. DTS-G3 supports communication methods including Wi-Fi, 4G and LAN, enabling the inverter to connect to the router or base station, and transmit data to the S-Miles Cloud for real-time monitoring and remote control. In addition, DTS-G3 supports Bluetooth for short-range communication between the inverter and App, offering users convenient control of power on/off, power adjustment, mode setting, and configuration parameters viewing via the App.

#### **Features**


- Plug and play
- Stable and reliable data transmission
- Supports Bluetooth local configuration
- IP66 protection


## **Applications**

## • DTS-WiFi-G3

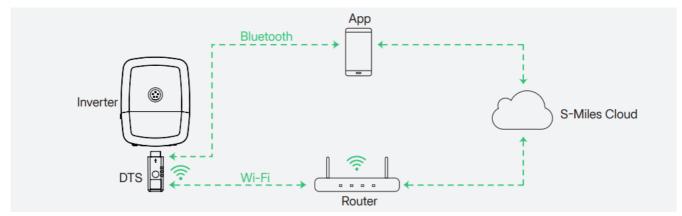

## • DTS-4G-G3

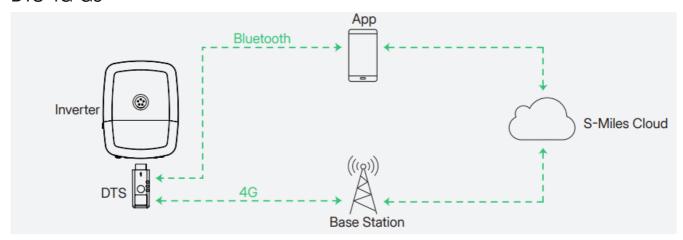

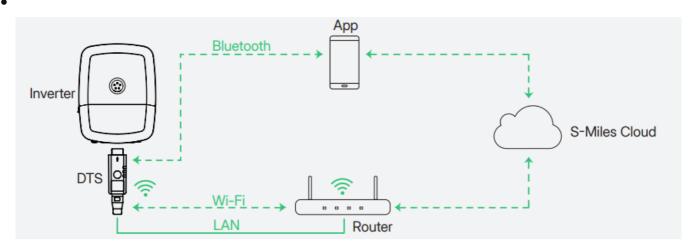


## DTS-WL-G3

- DTS Interface: Connect and communicate with the inverter.
- Inverter Interface: Connect and communicate with the DTS

## **Dimensions**

• DTS-WiFi-G3 / DTS-4G-G3

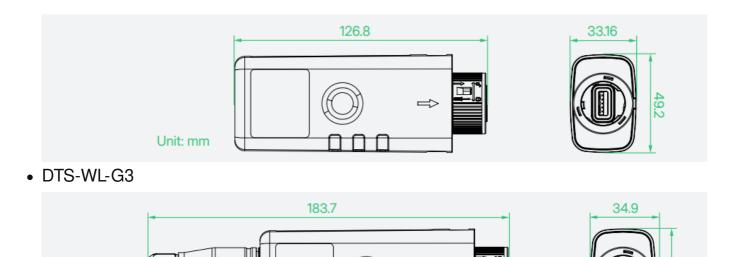

# **Technical Specifications**


Unit: mm


Model	DTS-WiFi-G3	DTS-4G-G3	DTS-WL-G3				
Communication							
Max. inverter supported		10					
Data upload cycle (min)		5					
Indicator		LED × 3					
Connection interface		USB					
4G standard	1	4G: LTE-FDD / LTE-TDD 3G: WCDMA / HSDPA / HSUPA / HSPA+ 2G: GSM / GPRS / EDGE	1				
Wi-Fi standard		IEEE 802.11 b/g/n @2.4 GHz					
LAN standard	1	1	10/100 Mbps adaptive; Max. length of network cable: 100 m				
Bluetooth standard		Bluetooth 5.0					
Configuration method	BLE App						
General							
Operating voltage (V)		5					
Power consumption (W)		≤ 5					
Dimensions (mm)	49.2 × 126.8 × 33.16	49.2 × 126.8 × 33.16	49.2 × 183.7 × 34.9				
Weight (g)							
Protection degree	IP66						
Installation method	Plug and play						
Environment							
Operating temperature range (°C)	-25 to +65						
Relative humidity	0 to 95%, no condensing						
Operating altitude (m)	≤ 4000						
Certifications and Standards							
Certificate	CE; NTC; PTA; RED18031; MIC; NBTC						


## Installation

## Wi-Fi/4G DTS Installation

- Step 1 Remove the DTS port cover on the bottom of the inverter.
- Step 2 Insert the DTS into the DTS port. Listen for a click as they engage.










### **WLAN DTS Installation**


- Step 1 Turn the end of the DTS counterclockwise, and separate the DTS into four parts.
- Step 2 Plug the LAN cable into the network port on the part 1.
- Step 3 Slide part 2, 3 and 4 over the cable in sequence, and tighten all parts.








- Step 4 Remove the DTS port cover on the bottom of the inverter.
- Step 5 Insert the DTS into the DTS port. Listen for a click as they engage.









### **NOTICE**

• For both types of devices, if you need to remove the DTS, turn the lock ring counterclockwise and unplug it.




## **Indicators and Button**

## **Indicators Status**

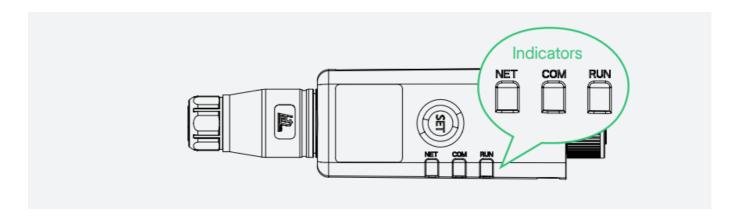

Indicat or	Statu	Indication
	On	The network is connected, and communication with the S-Miles CI oud is normal.
	Off	Network not connected
NET	Blinkin g	The network is connected, but communication with the S-Miles Clo ud is abnormal.
	On	Communication with the inverter is normal.
СОМ	Off	Communication with the inverter is abnormal.
	On	Connected to external power supply
RUN	Off	Not connected to external power supply

## **Button Instruction**

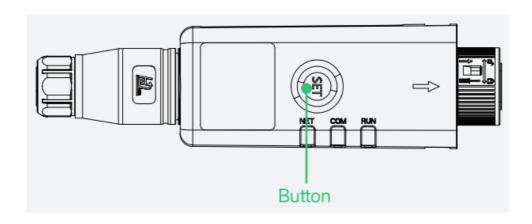

Operation	Function
Press two times	Reboot software
Press for 5s to 10s	Reset password


## **Network Configuration**

### **NOTICE**

- The screenshots provided here are for reference only. The actual screens may vary.
- For additional details of App operation, see S-Miles Installer App Operating Guide.
   Step 1 Scan the QR code below, or search for "S-Miles Installer" on the App Store (iOS) or Google Play Store (Android) to download the app.



- Step 2 Open and log in to the app using your credentials.
- Step 3 Tap O&M > Network Config . The app will scan for the Bluetooth of nearby devices.
- Step 4 On the Via Bluetooth part, tap the DTS to be connected.
- Step 5 Enter the PIN code (only required for the first connection, by default is 123456), and tap Confirm.

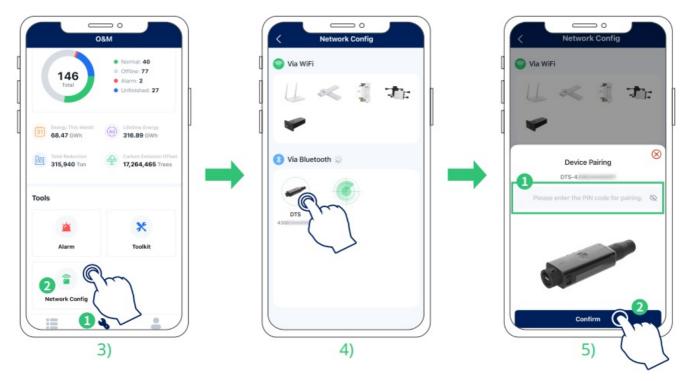

Step 6 Connect to the network.

- Ethernet Mode (Only applicable to DTS-WL-G3): DTS and router are connected via LAN cable. Select Ethernet and tap Send to DTU.
- Wi-Fi Mode: Select Wi-Fi. Enter the router's Wi-Fi name and password, and tap Send to DTU.

Step 7 When the connection is successful, tap Finish.



## **FCC Statement**

Any Changes or modifications not expressly approved by the party responsible for

compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

### **FCC Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance 20cm between the radiator your body.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. ISED RSS
   Warning/ISED RF Exposure Statement ISED RSS Warning: This device complies with
   Innovation, Science and Economic Development Canada licence-exempt RSS
   standard(s). Operation is subject to the following two conditions: (1) this device may
   not cause interference, and (2)this device must accept any interference, including
   interference that may cause undesired operation of the device.

**ISED RF exposure statement:** This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator& your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Hoymiles Customer Support: <u>hoymiles.com/support/</u>

## **Frequently Asked Questions**

### Q: Where can I find the latest version of the user manual?

A: The latest version of the manual can be found on the Hoymiles official website at <a href="https://www.hoymiles.com">www.hoymiles.com</a> or by scanning the QR code provided in the manual.

## Q: How can I contact customer support for technical queries?

A: You can contact customer support through the Hoymiles service portal or via email, based on your region. Refer to the contact details provided in the manual.

## Q: What warranty conditions should I follow?

A: Follow the installation instructions in the manual to ensure warranty compliance. The current warranty conditions can be accessed on the Hoymiles website.

## **Documents / Resources**



hoymiles DTS Series Data Transfer Stick [pdf] User Manual DTSWIFIG3, DTS-4G-G3, DTS-WL-G3, DTS Series Data Transfer Stick, D TS Series, Data Transfer Stick, Transfer Stick, Stick

## References

- User Manual
- hovmiles
- ▶ Data Transfer Stick, DTS Series, DTS Series Data Transfer Stick, DTS-4G-G3, DTS-WL-G3, DTSWIFIG3, hoymiles, stick, Transfer Stick

Leave a comment

Your	email	address	will	not	be	published.	Requ	uired	fields	are	marked*

Comment *
Name
Email
Website
☐ Save my name, email, and website in this browser for the next time I comment.
Post Comment
Search:
e.g. whirlpool wrf535swhz

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.