



## i-box Glow FS-058 Bedside Alarm Clock User Manual

[Home](#) » [i-box Glow](#) » i-box Glow FS-058 Bedside Alarm Clock User Manual 

# i-box

Glow FS-058 Bedside Alarm Clock  
User Manual



## **Contents**

- [1 Introduction](#)
- [2 Control Panel](#)
- [3 Powering your Glow alarm clock](#)
- [4 Bluetooth play operation](#)
- [5 Setting the alarms](#)
- [6 Wireless charging](#)
- [7 Specifications](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

## **Introduction**



The i-box Glow is an all-in-one bedside accessory that combines a stand for your phone, perfect for watching videos handsfree, with an integral 5W Wireless charger, Bluetooth speaker, FM radio, dual alarm, and even a handy nightlight with multiple color settings.



#### **Caring for your Glow Alarm**

Important Safety Information

**Important** – Please read these instructions fully before installing or operating your speaker. Keep away from flame sources such as lighted candles.



Do not expose to dripping or splashing fluids.

The unit should not be exposed to direct sunlight, very high or low temperature, moisture, vibrations, strong magnetic fields, high frequencies, and dusty environments.

Do not place the unit in enclosed bookcases or racks without proper ventilation. Ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, tablecloths, curtains, etc.



This product contains a built-in Li-ion battery. It must be used and charged properly. Improper use can cause the battery to catch fire or explode resulting in serious or fatal injury.

Never attempt to insert wires, pins, or other such objects into the vents or openings of the unit.

Do not disassemble or modify the speaker, there are no user-serviceable parts.

If the speaker is damaged in any way or malfunctions do not use it. Consult a qualified service engineer.

Do not use abrasives, benzene, thinner, or other solvents to clean the surface of the unit. To clean, wipe with a clean soft cloth and a mild detergent solution.



This product uses batteries and both products and batteries should be disposed of appropriately. Do not dispose of them with household waste at the end of their life cycle; take them to a collection center for the recycling of electrical, and electronic appliances and batteries. Please check with your Local Authority for recycling advice.



## Box Contents

- 1x i-box Glow speaker,
- 1x 5V=3.5A AC/DC power adaptor


## Getting to know your Glow alarm clock

Before you get started please read the safety information on pages 2-3.

## Control Panel

### Top – Control Panel



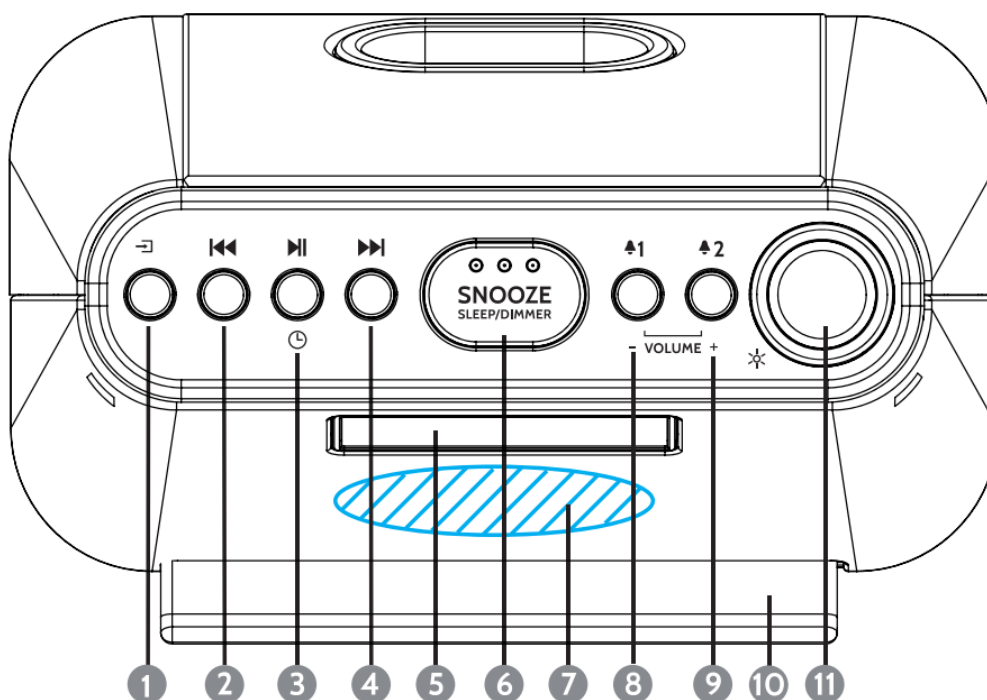


1. Mode FM/BT/Sounds – short press to change mode, long press to enter standby mode
2. Previous track
3. Play/Pause
4. Next track
5. LCD Display
6. Snooze – short press (when the alarm is sounding)
6. Sleep mode – long press to enter -short press to set sleep time


6. Dimmer – short press
7. Wireless charging area
8. 1 Alarm 1/Volume
9. 2 Alarm 1/Volume
10. Phone stand
11. Nightlight On/Off



## Back

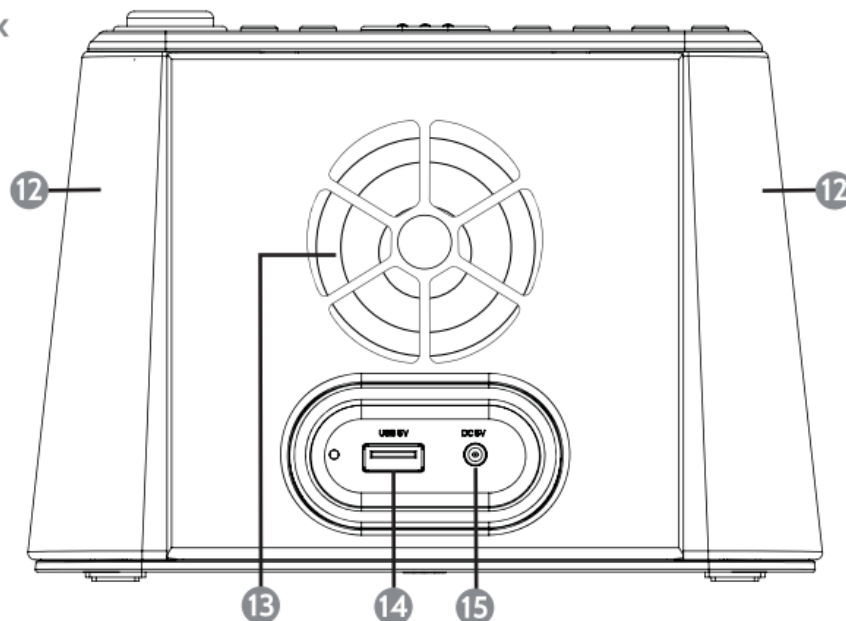

## Base

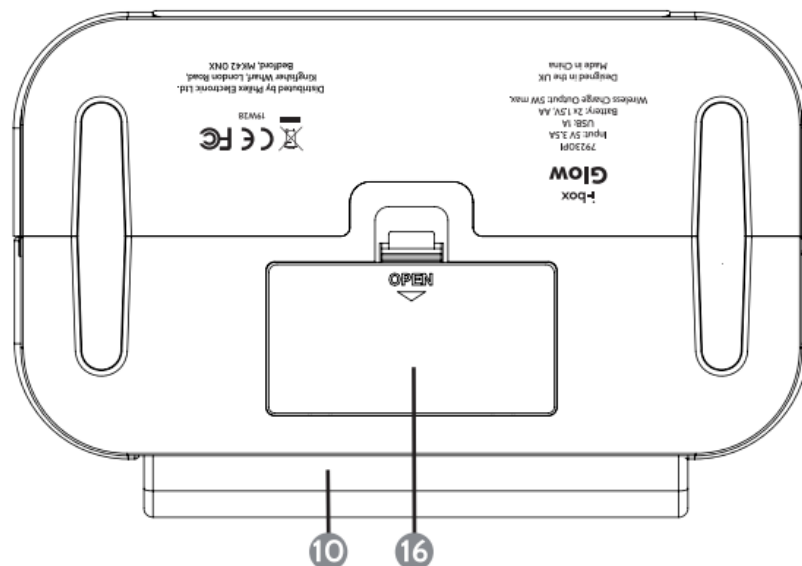

10. Phone stand  
12. Nightlight  
13. Speaker

14. USB charging port  
15. DC adaptor jack  
16. Back up battery compartme

## Powering your Glow alarm clock

The Glow is powered by the AC/DC power adaptor supplied. Plug the adaptor into a mains socket and then connect to the DC power socket (15) on the back of the Glow. The Glow will switch on automatically in clock/standby mode and the LCD will light up.











### Battery backup


In addition to the DC-In power supply, you can fit 2 x AA batteries (not supplied) in the battery compartment (16) to provide a backup power supply. If the mains supply is disconnected or interrupted the power supply is automatically switched to the backup battery. so that the time and alarm settings are not lost.

**Please Note:** speaker, radio, and charging functions will not operate when the Glow is powered solely by the backup batteries. When fitting the batteries make sure their polarity matches the markings in the battery compartment.


### Setting the time

1. Plug in the AC/DC power adaptor supplied, and the default time of 0:00 will appear on the LCD display (5).

2. Long press the clock  key (3), and the LCD will display "24hr" press the  (2) or  (4) keys to switch between 24hr and 12hr clock settings.
3. Then press the  clock key (3) again to set the hour and use the  (2) or  (4) keys to change the hour.
4. Press the  clock key (3) to set the minutes and use the  (2) or  (4) keys to change the minutes.
5. Press the  clock key (3) again to confirm the time set.

To reset the clock, long-press the  mode key (1) to enter standby mode then follow steps 2-5 above.




### Bluetooth pairing

1. Press the  mode key (1) twice to enter Bluetooth pairing mode. "bt" will appear on the display and also the Bluetooth symbol will flash.
2. Place the device you want to pair with your Glow within 1m of it, enter your device's Bluetooth menu and select "i-box Glow" in the device list. When your Glow and device are paired, you will hear a chime and the Bluetooth symbol which will stop flashing.




Once paired with a device the Glow will reconnect automatically when switched to Bluetooth mode if the paired device is within range.

### Bluetooth play operation





While listening to audio in Bluetooth mode:




1. Press Volume +/- keys (8/9) to increase or reduce the volume level.
2. Press the  Next (4) or  Previous (2) keys to play the next or previous track.
3. Press the  Pause/Play key (2) to play or pause the track.

### FM radio operation





1. Press the  Mode key (1) repeatedly until FM and an FM frequency appear on the LCD display.
2. Long press the  (2) or  (4) keys to scan backward or forwards through the frequencies to the previous or next radio station.





### FM presets – storing and recall

To store the station playing to a preset long-press the  Play/Pause key (3) a flashing preset number will be displayed, press the  (4) or  (2) keys to scroll through the 10 preset positions. To store the station playing to the preset position selected and to exit store mode press the  Play/Pause key (3) again.




To recall a preset stored station short press the  Play/Pause key (3) and press the  (4) or  (2) keys to scroll through the presets available to the one you want to play.

### White noise and nature soundtrack mode

This mode allows you to play white noise or a selection of nature soundtracks to help lull you to sleep. You can also use the SLEEP function to switch these sounds off after a set period of time. Soundtracks available are -1: White noise soundtrack, -2: Frog soundtrack, -3: Flowing water soundtrack, and -4: Birdsong soundtrack.

















1. Press the  mode key (1) three times to enter this mode.  will appear on the display and the White Noise soundtrack will play.
2. Press  (2) or  (4) to scroll through the soundtracks available.
3. Press Volume +/- keys (8/9) to increase or reduce the soundtrack volume level.

## Sleep function

1. With audio playing via Bluetooth or the radio playing or with one of the nature soundtracks playing, long-press the  Sleep key (6) to enter Sleep mode.
2. Short press the  key (6) repeatedly to scroll through the Sleep settings available: **120, 90, 60, 30, 75, 70, 05, OFF**. "SLEEP" will appear on the LCD panel.
3. When sleep is set long-press the  key (6) to check the sleep period remaining.

## Setting the alarms

You have a choice of two alarms you can set, ideal for couples who need to get up at different times.


1. First long-press the  mode key (1) to enter standby mode, and press and hold  alarm 1 key (8) for 3 seconds, to start setting the time for alarm 1.
2. Press  (2) or  (4) to change the hour then press  alarm 1 key (8) to select
3. Press  (2) or  (4) to change the minutes then press  key (8) to select
4. Press  (2) or  (4) to scroll through the alarm sound options – FM (Radio),  (Bleep),  (White Noise),  (Frog Soundtrack),  (Flowing Water Soundtrack),  (Birdsong Soundtrack), Press  key (8) to select an option, and exit the alarm setting mode.

To set alarm 2 repeat steps 1-4 above using the  alarm 2 key (9).

### Alarm Enable/disable

In standby mode, press  (8) or  (9) to enable or disable the alarm


### Snooze & stop alarm

When the alarm sounds, press the  Snooze key (6) to delay the alarm for 9 minutes. Press any other key to turn the alarm off.

## Wireless charging



If you have a phone with Qi wireless charging capability you can use your Glow to charge it. Thanks to the positioning of the charging pad it is easy to watch movies, look at recipes, make video calls, and much more while your phone is charging.


1. Place your smartphone centrally on the phone stand (10). As shown opposite.
2. The  wireless charging icon will be displayed in the bottom left of the LCD panel while your phone is charging and the battery charge status can be seen on your phone's display.

**Please Note:** Your phone will not charge when the Glow is in backup mode (not being powered via the USB socket).

Wireless charging may interfere with radio reception and we advise you not to try listening to FM radio while charging.

**If problems occur when charging or if charging does not start**

- Remove your smartphone from its case if the thickness of the case exceeds 5mm or if it has a metal composition.
- Phones that are capable of wireless charging may need to be placed slightly off-center. The built-in wireless receiver may not be centered inside the phone. This varies by brand/model.
- The charging time varies depending on the charging capacity of the battery and its current residual capacity.
- The components may heat up during the charging process. They will slowly cool down again after the charging process.

**WARNING:** If the  wireless charging icon flashes repeatedly a foreign metal object has been detected. You

should remove it from the charging area immediately as it can represent a hazard and could cause a fire.

### **USB Charging**




For phones and other devices that don't have Qi charging capability, you can charge them using them using the USB charging port (14) located on the back panel of your Glow.

1. Connect your phone via a suitable USB charging cable (not supplied) to the USB charging port (14) on the back of the Glow.
2. The charge state is indicated on your phone/external device as usual.


### **Please Note:**

- USB Charging may interfere with radio reception and we advise you not to try listening to FM radio while charging.
- Please use only one charging method at a time.
- Do not attempt to charge your device with a wireless charger & USB cable both at the same time.

### **Nightlight**

1. Short press the  Nightlight key (11) to turn on the LED nightlight panels (12).
2. Short Press the  Nightlight key (11) repeatedly to scroll through the different color options available: Cool White, Warm White, Blue, Green, and Red. Purple and the seventh option in which the LED slowly cycles through a spectrum of multiple colors.
3. Long Press the  Nightlight key (11) to switch the Nightlight OFF.

### **Dimmer function**

1. Short press the  Snooze/Sleep/Dimmer key (6) repeatedly to select your preferred light level for the LCD panel. There are six levels including off.

### **Specifications**

**Glow power Input:**  $SV=3.5A$

**Speaker Output:** 1x 3W RMS

**Wireless Charging Output:** 5W

**USB Charging Output:** 1A

**Back up battery requirement:** 2x 1.5V AA Alkaline batteries

**Power Adaptor Input:** 100-240V-50/60Hz, 0.75A

### **Disclaimer**

Updates to Firmware and/or hardware components are made regularly. Therefore some of the instructions, specifications, and pictures in this documentation may differ slightly from your particular situation. All items described in this guide are for illustration purposes only and may not apply to your particular situation. No legal rights or entitlements may be obtained from the description made in this manual.

### **Declaration of conformity**

Hereby, Philex Electronic Ltd. declares that the radio equipment: model i-box Glow Alarm Clock with Bluetooth Speaker, Wireless Charging, and Nightlight for wireless reception in domestic premises is in compliance with the Radio Equipment Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.philex.com/doc](http://www.philex.com/doc)

## Technical support

For further help, advice, information, or live chat visit [www.iboxstyle.com](http://www.iboxstyle.com)



Waste electrical and electronic products should not be disposed of with household waste.  
Please recycle where facilities exist  
Check with your Local Authority for recycling advice

**Philex Electronic Ltd 2019. v1.5**

Kingfisher Wharf, London Road,  
Bedford, MK42 ONX UK  
Made in China

## Documents / Resources



**[i-box Glow FS-058 Bedside Alarm Clock](#)** [pdf] User Manual

FS-058, FS058, 2ASXGFS-058, 2ASXGFS058, FS-058 Bedside Alarm Clock, Bedside Alarm Clock, Alarm Clock, Clock

[Manuals+](#).