



i-box 79236PI/17 Bedside Alarm Clock with Wireless Charging User Manual

[Home](#) » [i-box](#) » i-box 79236PI/17 Bedside Alarm Clock with Wireless Charging User Manual 

i-box

Contents

- [1 i-box 79236PI/17 Bedside Alarm Clock with Wireless Charging](#)
- [2 Introduction](#)
 - [2.1 Caring for your Alarm Clock](#)
- [3 Box Contents](#)
- [4 Controls & Features](#)
- [5 Clock setting](#)
- [6 Alarm setting](#)
- [7 Bluetooth connecting & disconnecting](#)
- [8 Bluetooth play operation](#)
- [9 FM radio operation](#)
- [10 FM radio memory](#)
- [11 Charging your phone](#)
- [12 USB charging port](#)
- [13 FREQUENTLY ASKED QUESTIONS](#)
- [14 VIDEO – PRODUCT OVERVIEW](#)

i-box 79236PI/17 Bedside Alarm Clock with Wireless Charging



Introduction

The i-box Dawn combines a traditional bedside alarm clock radio with Bluetooth and a wireless charging pad in a neat stylish solution. Rest your phone on top to charge it while you are sleeping.

Caring for your Alarm Clock

Important Safety Information




- **Important** – Please read these instructions fully before installing or operating your speaker. Keep away from flame sources such as lighted candles.
- Do not expose to dripping or splashing fluids. Objects filled with liquids, such as vases, must not be placed close to the speaker. The unit should not be exposed to direct sunlight, very high or low temperatures, moisture, vibrations, strong magnetic fields, high frequencies, and dusty environments.
- Do not place the product in enclosed bookcases or racks without proper ventilation. Ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, tablecloths, curtains, etc. Never attempt to insert wires, pins, or other
- such objects into the vents or openings of the unit.




- Do not disassemble or modify the alarm clock, there are no user-serviceable parts.
- If the alarm clock is damaged in any way or malfunctions do not use it. Consult a qualified service engineer.
- Do not use abrasives, benzene, thinner or other solvents to clean the surface of the unit. To clean, wipe with a clean soft cloth and a mild detergent solution.
- Do not dispose of this product with household waste at the end of its life cycle; hand it over to a collection center for the recycling of electrical and electronic appliances.



Box Contents

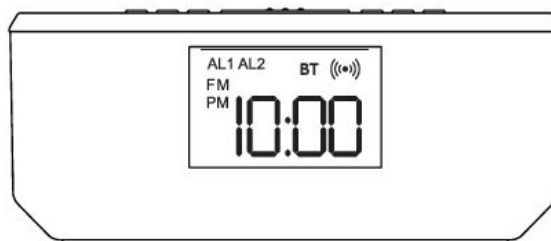

**i-box Dawn Bedside alarm
clock with wireless charging**




DC power adaptor







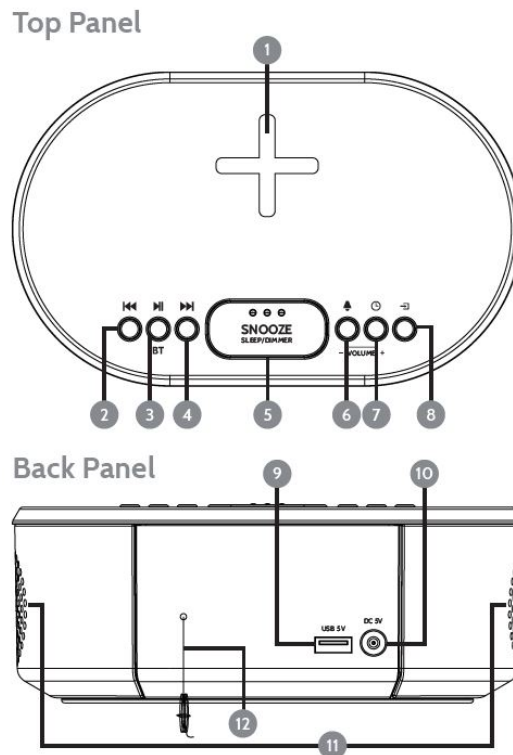




Getting to know your alarm clock

Before you get started please be sure to read through the safety information on pages 2-3.

Controls & Features




1. Wireless charging location
2. Previous song/ Down button
3. Play/Pause
4. Next song/Up button
5. Snooze/Sleep/Dimmer
6. Volume down/Alarm set
7. Volume up/Clock
8. Key Stand by mode/Function key
9. USB Charging port
10. DC adaptor jack
11. Speakers
12. Wire Antenna
13. Back up the battery door
14. Time display
15. Alarm indicators
16. PM Indicator
17. FM Indicator
18. Bluetooth Indicator
19. Wireless charging indicator



3. Press  (6) and  (2/4) to select the AL1 minute(s).
4. Press  (6) and  (2/4) again to select the AL1 source (beep or FM).
5. Press  (6) and  (2/4) to select the AL2 hour.
6. Press  (6) and  (2/4) to select the AL2 minute(s).
7. Press  (6) and  (2/4) again to select the AL2 source (beep or FM).
8. Press  (6) again once the alarm(s) has been set to exit.

Alarm enable/disable

1. In standby mode, press  (6) to enable the alarm.
2. The alarm will cycle through AL1 / AL2 / AL1 and AL2 / off.

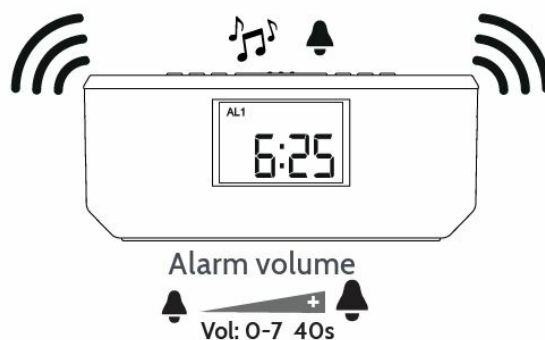Stop & Snooze alarm




When the alarm sounds, press  (5, Snooze) to delay the alarm for 9 minutes. Press  (8) to turn off the alarm.


Dimmer

Press  (5, Snooze) to select the brightness of the display.




Bluetooth connecting & disconnecting

1. Press (8) to cycle through the modes until you get to Bluetooth mode.
2. Once in Bluetooth mode, the display will flash while searching for the last connected device.
3. If the most recent connected device can not be found, the i-box Dawn will search for previous devices.
4. Select i-box Dawn from the Bluetooth list on your device to start pairing.
5. Once pairing is successful, the Bluetooth display will stop flashing and a beep will sound.
6. Press  (3) for 3 seconds to disconnect your device from the i-box Dawn. A beep will sound to






confirm the device has been disconnected successfully. The i-box Dawn will now be in pairing mode again, allowing you to pair a new device.

7. Long press  (8) to return to clock mode when you are finished.

Bluetooth play operation










- Press +/- (6/7) to increase or decrease the volume level (0-15).
- Press  (2) to play the previous song or press  (4) to select the next song.
- Press  / BT (3) to play or pause the song.

FM radio operation



1. Press (8) to cycle through the modes until you get to FM radio mode.
2. Press  (2) or  (4) to change the FM station.
3. Press and hold  (2) or  (4) to search for the next FM station automatically.
4. Press +/- (6/7) to increase or decrease the volume level.
5. Long press  (8) to return to clock mode when you are finished.

FM radio memory

There are 10 preset spaces available for you to store your favorite stations.

1. Press  (2) or  (4) to select the FM station you would like to store.
2. Press and hold  / BT (3) to bring up the preset menu.
3. Press  (2) or  (4) to cycle through the 10 preset spaces available.
4. Press  / BT (3) once you have selected the preset space for your chosen FM. station to save the preset.
5. Press  / BT (3) to access the stored presets.
6. To access your saved preset, press  (2) or  (4) until you get to your chosen preset then wait 5 seconds for the FM station to start playing.

Sleep mode

Sleep Mode lets you fall asleep while listening to Bluetooth or FM music for the set sleep duration then turns the music off. In FM radio or Bluetooth mode, press and hold  (5, Snooze) for 2 seconds. The i-box Dawn will display the sleep timer. Press  (5, Snooze) to cycle through the sleep time options. The available options are 120 mins / 90 mins / 60 mins / 30 mins / 15 mins / 10 mins / 5 mins/sleep timer off.

Charging your phone

You can charge your phone wirelessly or by using the available USB charging port on the back of the i-box Dawn. Please do not use both charging methods at the same time for one device (charging cable not included).

Wireless charging



1. Place your smartphone centrally on top of the i-box Dawn as shown.
 2. The battery power of your device is shown via your device's display.
- When the phone is being charged wirelessly, the wireless charging indicator (19) will light up on the display.
 - For maximum charging efficiency, the phone must be aligned with the center of the charging area (1).
 - Phones that are capable of wireless charging may need to be placed slightly off-center. The built-in wireless receiver may not be centered inside the phone. This varies by brand/model.

There may be interference to the radio reception if using wireless charging at the same time.

If problems occur when charging or if charging does not start:

- Remove your smartphone from its case if the thickness of the case exceeds 5mm or if it contains metal.
- Check if your smartphone is placed on top of the i-box Dawn correctly as shown.
- The charging time varies depending on the charging capacity of the battery and its current residual capacity.
- The components may heat up during the charging process. They will slowly cool down again after the charging process.

USB charging port

- Connect an external device via a USB cable to the USB charging port (9) on the back of the i-box Dawn to charge the device.
- The battery power of your device is shown via your device's display.
 - There may be some radio interference while charging.
 - Please charge your device using only one charging method at any one time.
 - Please do not charge the same device using the wireless charging function and USB charging port (9) at the same time.

Backup batteries

The i-box Dawn has a backup battery feature where 2x AAA batteries (not included) will allow it to remember the time and alarm settings if unplugged or power is cut.

Specifications

- **Power Input:** 5V?3.5A
- **USB Output:** 5V?1A
- **Speaker Output:** 6 Watt RMS

Disclaimer

Updates to Firmware and/or hardware components are made regularly. Therefore some of the instructions, specifications, and pictures in this documentation may differ slightly from your particular situation. All items described in this guide are for illustration purposes only and may not apply to your particular situation. No legal right or entitlements may be obtained from the description made in this manual.

Technical support

For further help, advice, information, or live chat visit www.iboxstyle.com

FREQUENTLY ASKED QUESTIONS

Does the i-box 79236PI/17 Bedside Alarm Clock have wireless charging capabilities?

Yes, the i-box 79236PI/17 Bedside Alarm Clock is equipped with wireless charging capabilities.

Which devices can be wirelessly charged using the alarm clock?

The alarm clock supports wireless charging for compatible smartphones and other Qi-enabled devices.

Is the alarm clock compatible with all smartphones for wireless charging?

The alarm clock is compatible with smartphones that support Qi wireless charging technology.

Does the i-box 79236PI/17 Bedside Alarm Clock have a built-in alarm function?

Yes, the alarm clock features a built-in alarm function to wake you up at your desired time.

Can multiple alarms be set on the i-box 79236PI/17 Bedside Alarm Clock?

Yes, you can set multiple alarms on the alarm clock to suit your preferences.

Does the alarm clock have a snooze function?

Yes, the i-box 79236PI/17 Bedside Alarm Clock includes a snooze function for a few extra minutes of sleep.

Can the alarm clock display the time in different formats (12-hour/24-hour)?

Yes, the alarm clock offers the option to display the time in both 12-hour and 24-hour formats.

Does the i-box 79236PI/17 Bedside Alarm Clock have a built-in FM radio?

Yes, the alarm clock features a built-in FM radio for listening to your favorite radio stations.

Can you save and preset your favorite radio stations on the alarm clock?

Yes, the alarm clock allows you to save and preset your preferred radio stations for quick access.

Does the i-box 79236PI/17 Bedside Alarm Clock have a backup battery in case of power outages?

Yes, the alarm clock has a backup battery to maintain the time and alarm settings during power outages.

Can the alarm clock display the date in addition to the time?

Yes, the i-box 79236PI/17 Bedside Alarm Clock can display both the time and date.

Does the alarm clock have a built-in temperature display?

Yes, the alarm clock includes a temperature display to provide current room temperature information.

Are there adjustable brightness levels for the alarm clock display?

Yes, the i-box 79236PI/17 Bedside Alarm Clock offers adjustable brightness levels for the display.

Can you connect external devices to the alarm clock, such as a smartphone or MP3 player?

Yes, the alarm clock features an auxiliary input, allowing you to connect external devices.

VIDEO – PRODUCT OVERVIEW



[Download the PDF Link: i-box 79236PI/17 Bedside Alarm Clock with Wireless Charging User Manual](#)
[Alarm-Clock-with-Wireless-Charging-User-Manual.mp4](#)